DK SMITHSONIAN

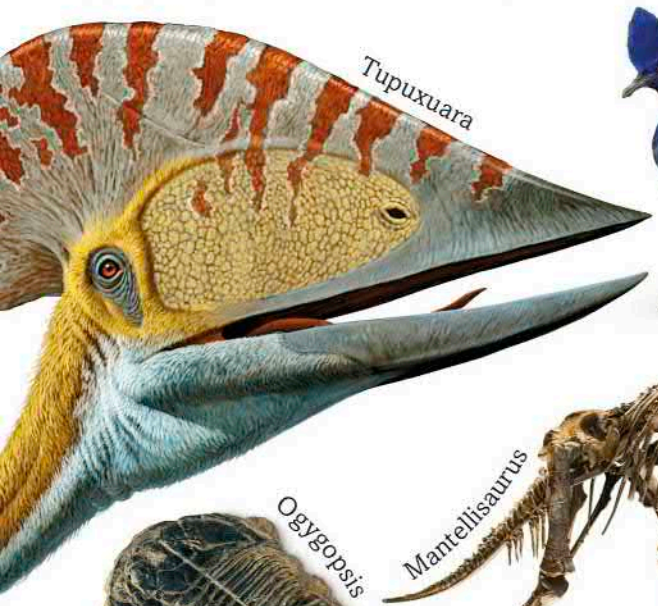

Tupuxuara

Hongshanornis

Lepidotes

Ammonite

Mantellisaurus

Ogygopsis

Sciadophyton

Einiosaurus

Scorpion in amber

THE DINOSAUR BOOK

Yi qi

Eryops

Mixosaurus

Therizinosaurus hand claw

Stegosaurus

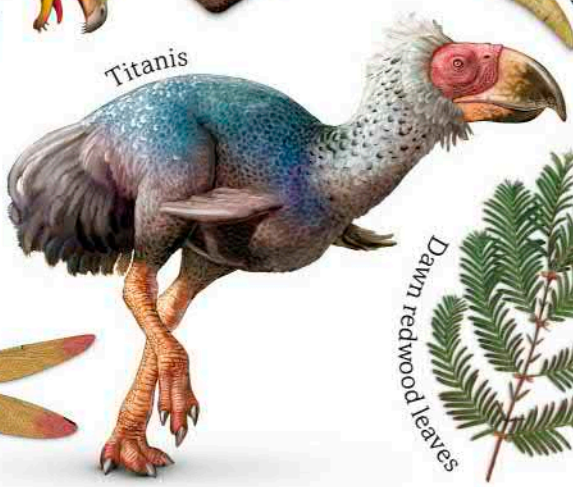

Titanis

Meganeura

Dawn redwood leaves

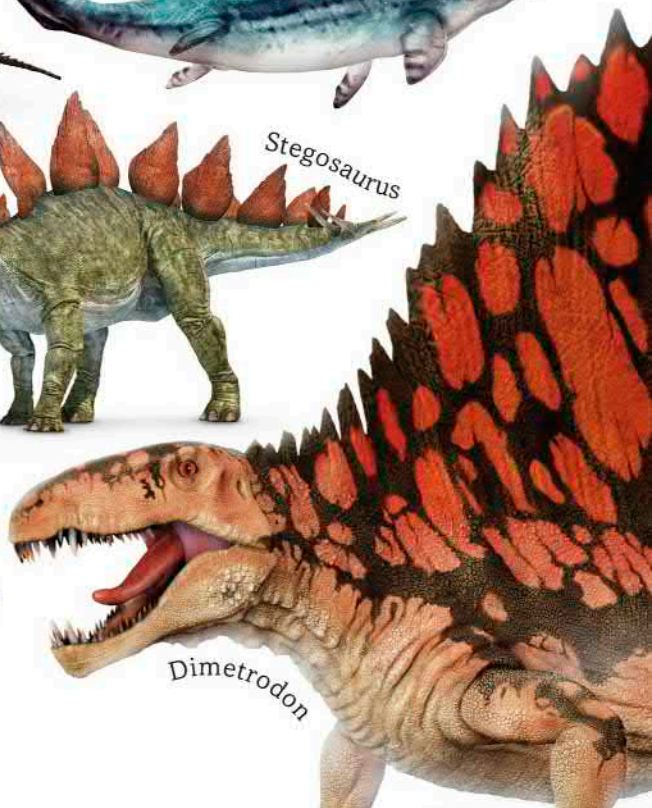

Dimetrodon

THE DINOSAUR BOOK

SMITHSONIAN

THE DINOSAUR BOOK

WRITTEN BY **JOHN WOODWARD**
CONSULTANT **DARREN NAISH**

Smithsonian

THE SMITHSONIAN
Established in 1846, the Smithsonian—the world's largest museum and research complex—includes 19 museums and galleries and the National Zoological Park. The total number of artifacts, works of art, and specimens in the Smithsonian's collection is estimated at 154 million. The Smithsonian is a renowned research center, dedicated to public education, national service, and scholarship in the arts, sciences, and history.

Penguin Random House

DK Delhi

Senior Editor Anita Kakar
Senior Art Editor Stuti Tiwari Bhatia
Editors Sneha Sunder Benjamin, Tina Jindal
Art Editors Devika Khosla, Debjyoti Mukherjee, Nidhi Rastogi
Assistant Editor Aishvarya Misra
Assistant Art Editor Ankita Sharma
Jacket Designers Suhita Dharamjit, Juhi Sheth
Jackets Editorial Coordinator Priyanka Sharma
Senior DTP Designer Harish Aggarwal
DTP Designers Jaypal Chauhan, Vijay Khandwal, Nityanand Kumar, Rakesh Kumar
Managing Jackets Editor Saloni Singh
Pre-production Manager Balwant Singh
Production Manager Pankaj Sharma
Senior Managing Editor Rohan Sinha
Managing Art Editor Sudakshina Basu

DK London

Senior Editors Shaila Brown, Ben Morgan
US Editor Kayla Dugger
Senior Art Editor Jacqui Swan
Jacket Editor Amelia Collins
Jacket Designer Surabhi Wadhwa-Gandhi
Jacket Design Development Manager Sophia MTT
Picture Researcher Jo Walton
Producer, Pre-production Jacqueline Street-Elkayam
Senior Producer Alex Bell
Managing Editor Lisa Gillespie
Managing Art Editor Owen Peyton Jones
Publisher Andrew Macintyre
Art Director Karen Self
Associate Publishing Director Liz Wheeler
Design Director Phil Omerod
Publishing Director Jonathan Metcalf

First American Edition, 2018
Published in the United States by DK Publishing
345 Hudson Street, New York, New York 10014

Copyright © 2018 Dorling Kindersley Limited
DK, a Division of Penguin Random House LLC
18 19 20 21 22 10 9 8 7 6 5 4 3 2 1
001–311231–Sep/2018

All rights reserved.
Without limiting the rights under the copyright reserved above, no part of this publication may be reproduced, stored in or introduced into a retrieval system, or transmitted, in any form, or by any means (electronic, mechanical, photocopying, recording, or otherwise), without the prior written permission of the copyright owner.
Published in Great Britain by Dorling Kindersley Limited

A catalog record for this book is available from the Library of Congress.
ISBN 978-1-4654-7476-6
Printed in China

A WORLD OF IDEAS:
SEE ALL THERE IS TO KNOW

www.dk.com

CONTENTS

Foreword 6
Timeline of life 8
Changing planet 10
Types of fossils 12
Fossil finds 14
Origin of life 16
Game-changers 18
Evolution and extinction 20
The vertebrates 22
What is a dinosaur? 24
Inside a dinosaur 26

Before the dinosaurs 28

The first animals 30
Built to survive 32
Set in stone 34
Trilobites 36
The age of fish 38
Fish armor 40
Early life on land 42
Towering trees 44
Arthropod empire 46
Airborne giant 48
Early amphibians 50
Rise of the reptiles 52
Reptiles branch out 54
Hungry hunter 56

The age of dinosaurs 58

The first dinosaurs 60
Prosauropods 62
Sauropods 64
Mobile necks 66
Titanosaurs 68
Footprints and trackways 72
Stegosaurs 74
About tails 76
Deadly spikes 78
Ankylosaurs 80
Dinosaur defense 82
Iguanodontians 84
Plant-eaters 86
Hadrosaurs 88
Cool crests 90
Dinosaur eggs 92
Dinosaur crèche 94
Pachycephalosaurs 96
Ceratopsians 98
Head-to-head 100
Herds and packs 102
Early theropods 104
Spinosaurids 106
Allosauroids 107
Cutting edge 108
Tyrannosaurs 110
Ultimate hunter 112
Ornithomimosaurs 114
Oviraptorosaurs 116
Arms and hands 118
Protective wings 120
Therizinosaurs 122
Sharp claws 124
Dromaeosaurs 126
Toothed eagle 128

Dinosaurs take flight 130

Skin, scales, and feathers 132
Feathered hunters 134
First up 136
Taking off 138
Early birds 140
Giant birds 142
High-speed killer 144

Pterosaurs 146

Early pterosaurs 148
Later pterosaurs 150
Prowling predator 152
Colorful crests 154

The marine world 156

Life in Mesozoic seas 158
Early marine reptiles 160
Flippers and tails 162
Giant marine reptiles 164
Ambush hunter 166

The rise of mammals 168

A new world 170
Trapped in amber 172
The first mammals 174
Giant sloths and armadillos 176
Body cover 178
Mega-marsupials 180
Giant herbivores 182
Horns and antlers 184
Powerful predators 186
Mammal teeth 188
Saber charge 190
Ice-age giants 192
Primates 196
Early humans 197
Window to the past 198

Glossary 200
Index 204
Acknowledgments 208

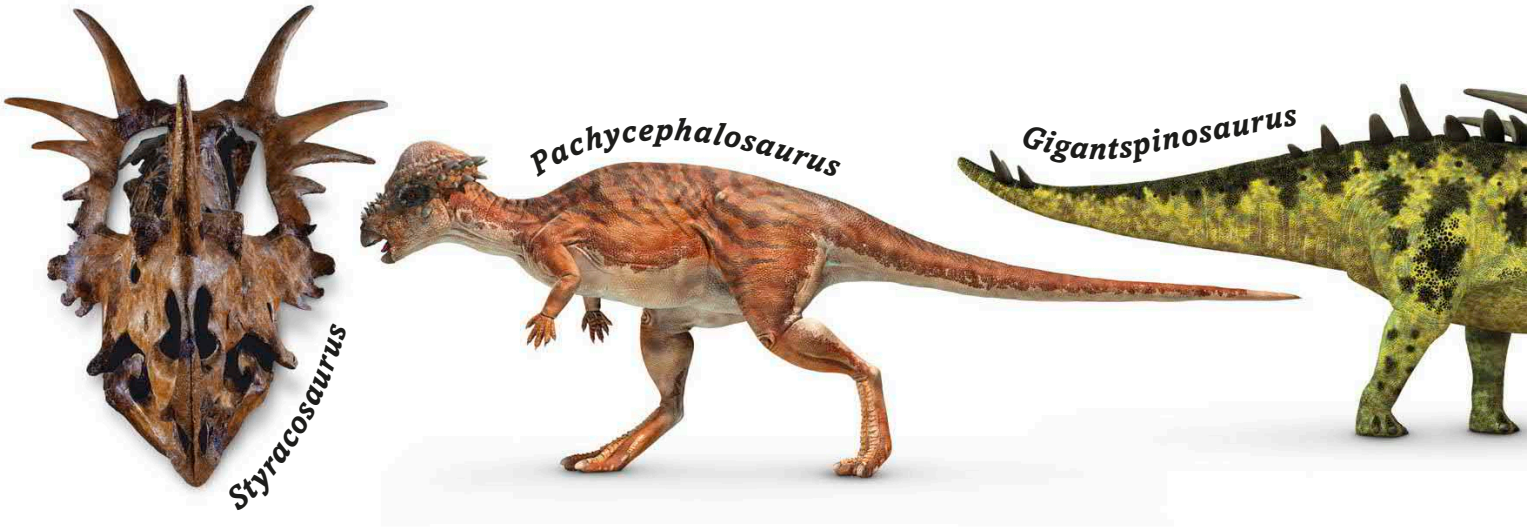

Foreword

The amazing variety of life that exists on our planet is so rich that new kinds of organisms are still being discovered every day. More than 2 million species (types of organisms) have been named and described by scientists, and there are probably millions more waiting to be discovered. But these are only a tiny fraction of the species that have ever existed on Earth in the past. If you were to go back in time 100 million years, you would find yourself surrounded by just as many different animals and plants as today, but—unless you had read this book first—you wouldn't recognize any of them.

Until a little over two centuries ago, no one realized this. They thought that the animals they saw around them had always existed, and that the world hadn't really changed over time. But in the late 18th century, scientists started examining strange shapes found in rocks and realized that they were fossils—the remains of ancient life that had been turned to stone. Most of these fossils were of seashells and other familiar forms, but some were dramatically different—huge bones, skulls, and teeth of gigantic animals that lived millions of years before the dawn of human history.

Using fossils that date right back to the beginning of life on Earth, about 3.8 billion years ago, scientists have been able to piece together most of the history of life. One of the most exciting parts of that story started about 230 million years ago with the earliest dinosaurs. Over the following 164 million years, these animals were to evolve into the most spectacular land animals that have

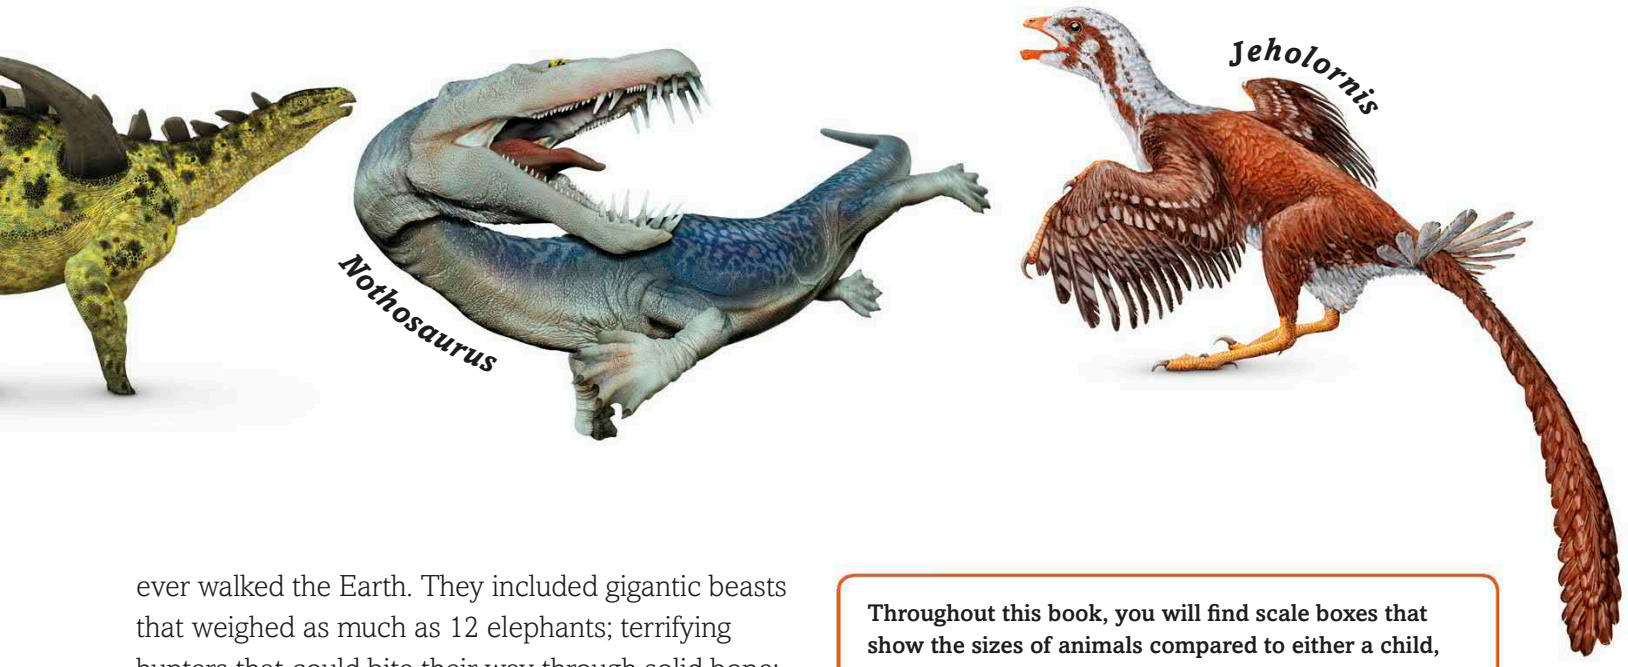

ever walked the Earth. They included gigantic beasts that weighed as much as 12 elephants; terrifying hunters that could bite their way through solid bone; and strange creatures with horns, frills, and even feathers.

The giant dinosaurs were wiped out in a global catastrophe 66 million years ago. But their fossils survive, along with other fossils that show, beyond doubt, that many of their smaller, feathery relatives were able to fly. Some of these feathered dinosaurs survived the disaster to flourish in the new era as birds. So not only do fossils tell us about life in the distant past, they can also reveal astonishing facts about animals that we see all around us every day.

John Woodward

Throughout this book, you will find scale boxes that show the sizes of animals compared to either a child, a school bus, or a human hand.



Child = 4 ft 9 in (1.45 m) tall



School bus = 36 ft (11 m) wide

Hand = 6 in (16 cm) long

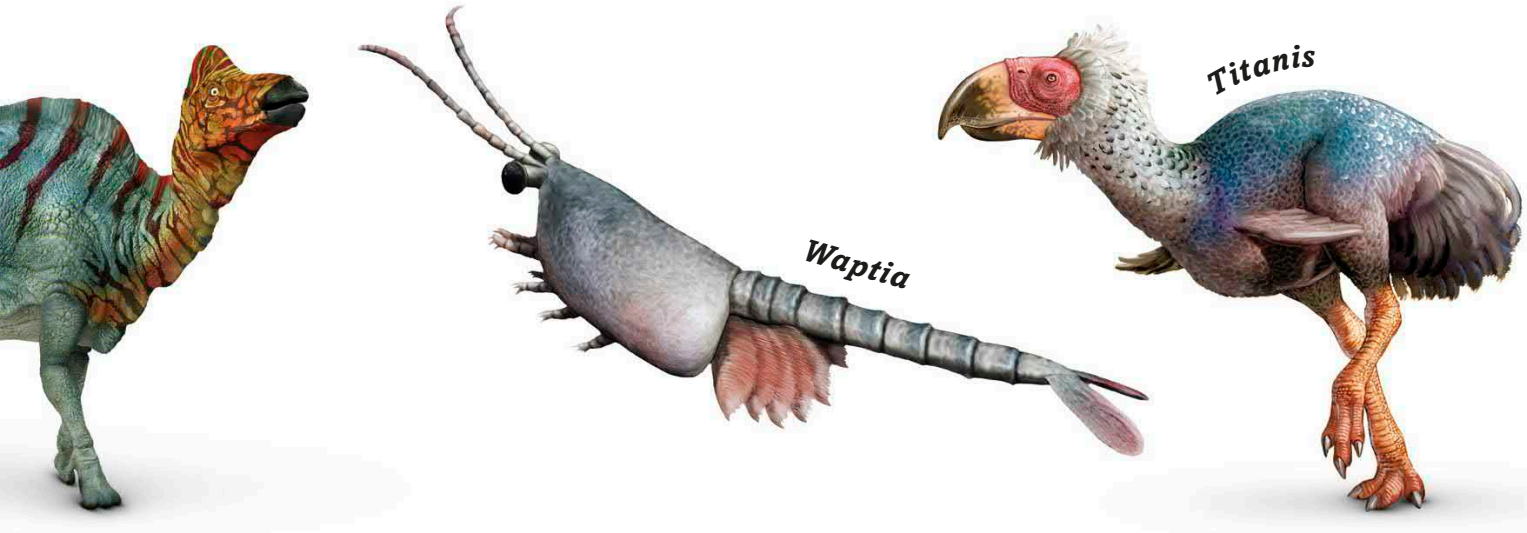

Timeline of life

The story of life on Earth is written in the rocks. Over millions of years, sediments like sand and clay settle on the floors of lakes and oceans and harden to form layer after layer of sedimentary rock. Trapped in these ancient deposits are the fossilized remains of prehistoric organisms, with each layer capturing a snapshot of life from a different period in history.

KEY

- Early Earth
- Paleozoic Era
- Mesozoic Era
- Cenozoic Era

Million years ago **MYA**

251–200 MYA

Triassic
Reptiles ruled the world in the Triassic. They gave rise to the first dinosaurs, the first flying reptiles, and the first true mammals, which were little bigger than shrews. Crocodiles and turtles appeared, and the giant aquatic reptiles cruised the ocean.

Rhamphorhynchus

200–145 MYA

Jurassic
The Jurassic saw the rise of the colossal plant-eating sauropod dinosaurs such as *Brachiosaurus*, as well as the giant meat-eating theropods that preyed on them. Smaller theropods evolved into the first birds. Deserts shrank and forests of conifer trees, monkey puzzles, and ferns spread across the land.

Allosaurus

299–251 MYA

Permian
Earth's climate dried out in the Permian, and deserts replaced forests. Reptiles and related animals called synapsids were the dominant land animals. Unlike amphibians, which breed in water, reptiles laid waterproof eggs and could breed on land. At the end of the Permian, most of Earth's species were wiped out by a catastrophe of unknown cause.

Moschops

Edaphosaurus

4.6–0.5 billion years ago

Precambrian
The Precambrian is a supereon that makes up nearly nine-tenths of Earth's history. For most of it, the only life forms were single-celled organisms in the ocean, such as cyanobacteria. Fossilized imprints of much larger, leaf-shaped organisms that might have been animals appeared about 600 million years ago. Known as the Ediacaran organisms, these life forms vanished at the end of the Precambrian.

Cyanobacteria

542–488 MYA

Cambrian
A wide range of new animal fossils appear in rocks from the Cambrian Period. A sudden burst of evolution—the Cambrian explosion—seems to have produced animals with the first limbs, heads, sense organs, shells, and exoskeletons. All the major categories of invertebrate alive today originated in the Cambrian, from mollusks and arthropods to echinoderms such as *Helicoplacus* (a relative of starfish).

Helicoplacus

Geological periods

Earth's history stretches back 4.6 billion years. This vast span of time is divided into long sections called eras, which are divided in turn into shorter sections called periods. The Jurassic Period, for instance, is when many of the dinosaurs lived. The periods are named after different bands of sedimentary rock, each of which has a distinctive collection of fossils.

23–2 MYA

Neogene
Mammals and birds evolved into recognizably modern forms in the Neogene. Our ape ancestors left the trees and adapted to life in grasslands by walking on two legs.



Dryopithecus

2 MYA to present

Quaternary
Our ancestors evolved larger brains in this period and invented ever more ingenious tools to hunt, make fire, build homes, sew clothes, and farm the land.

Homo habilis

66–23 MYA

Paleogene
The death of the giant dinosaurs allowed mammals to take their place. They evolved from small nocturnal creatures into a great diversity of land and sea animals, including giant herbivores such as *Chalicotherium*, which used its long arms to reach the highest branches of trees.

Uintatherium



Chalicotherium

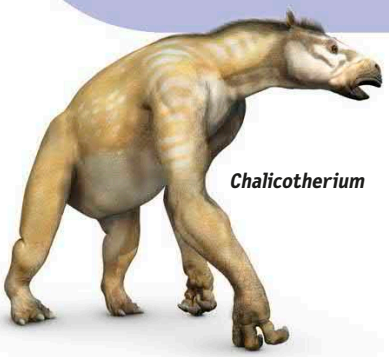

145–66 MYA

Cretaceous
Dinosaurs of the Cretaceous included *Tyrannosaurus* and the plant-eating ceratopsians, which had distinctive horned faces, neck frills, and beaks. All dinosaurs except for a few birds perished in a mass extinction at the end of the period, along with many other prehistoric animals.

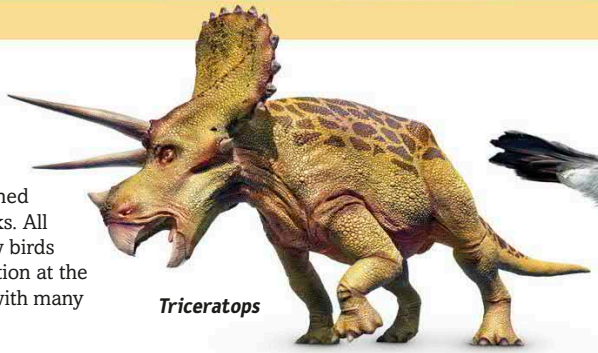

Triceratops

Ichthyornis

Magnolia

358–299 MYA

Carboniferous
This period gets its name from the carbon deposits found in its rock as coal. Coal is the fossilized remains of lush rainforests that covered the land. These were home to giant millipedes, giant dragonflylike insects, and early amphibians, which had evolved from Devonian fish.

Sigillaria

Meganeura



416–358 MYA

Devonian
Fish ruled the ocean in the Devonian, which is sometimes called the age of fish. The largest of them were placoderms—jawed fish with armor-plated bodies to protect them from their enemies' jaws.

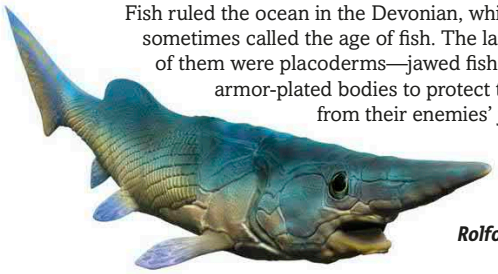

Rolfosteus

488–444 MYA

Ordovician
Warm waters covered much of Earth in the Ordovician, submerging the continent that would later form North America. The oceans teemed with trilobites—large, pillbug-shaped creatures that scuttled across the seabed or swam shrimplike through the water. The first fish and starfish appeared, and simple plants probably began to colonize the land.

Trilobite fossils

444–416 MYA

Silurian
Coral reefs flourished in the Silurian, providing habitats for the first fish with bones and the first fish with powerful, biting jaws rather than sucking mouths. Land plants remained small, but they began to acquire the tough, water-carrying veins that would later form wood and trigger the rise of trees.

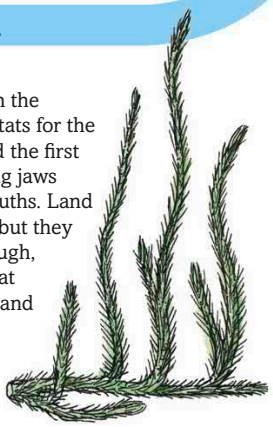

Baragwanathia

Changing planet

If you were to travel back in time to the Mesozoic Era—the age of dinosaurs—Earth would seem like an alien world. The continents had different shapes, the climate was hotter, and strange prehistoric plants covered much of the land. Dinosaurs and their prehistoric relatives ruled this world for nearly 200 million years. The vast span of time is divided into three different periods, each with its own distinct animal and plant life: the Triassic, the Jurassic, and the Cretaceous.

251–200 million years ago

Horsetail

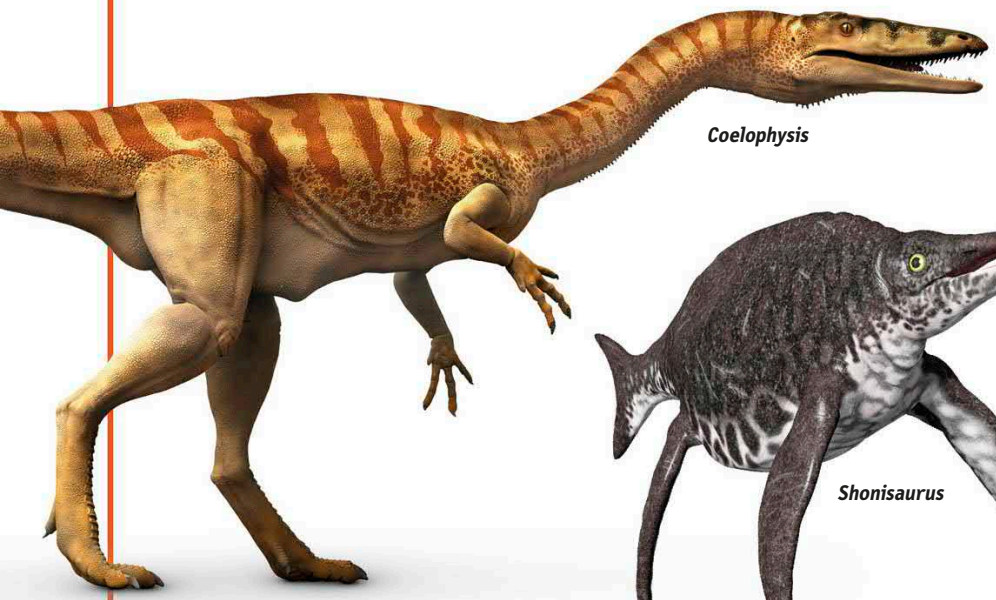

Coelophysis

Ginkgo

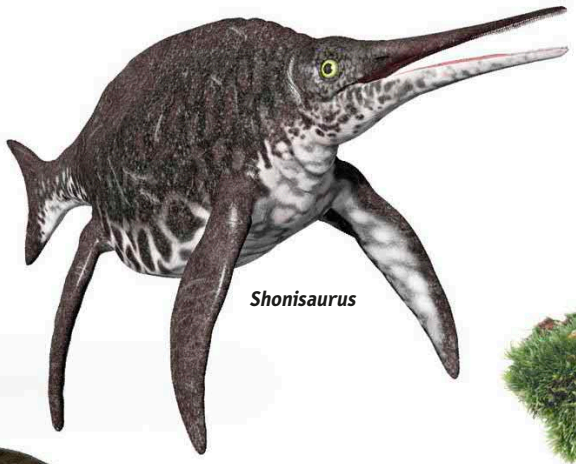

Shonisaurus

Moss

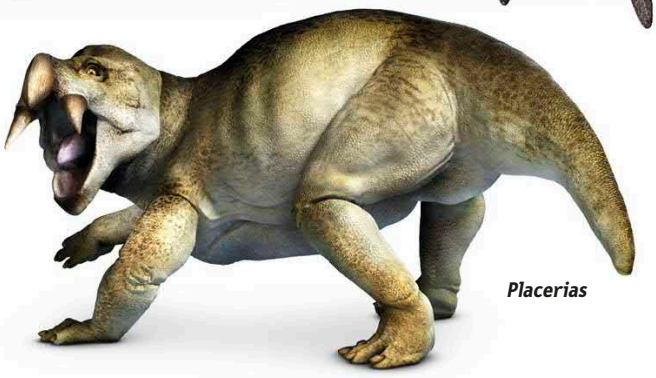

Placerias

Triassic world

At the start of the Triassic Period, the continents were joined in a single supercontinent called Pangea. Its interior was desert, but the climate was wetter near the coast, allowing forests of ginkgo trees and giant horsetails to grow. The first dinosaurs—small, two-legged meat-eaters—appeared in the Triassic. They coexisted with stocky, tusked, plant-eating animals such as *Placerias*—a relative of early mammals.

200–145 million years ago

Jurassic world

The giant continent of Pangea split during the Jurassic, torn apart by volcanic forces from deep inside Earth, and formed two large new continents. Moist sea air could now carry rain to more of the land, allowing forests to replace desert. Dinosaurs became the dominant land animals, and some evolved into giants, such as *Barapasaurus*, a long-necked plant-eater. The first feathered and flying dinosaurs evolved, including *Archaeopteryx*, a birdlike predator.

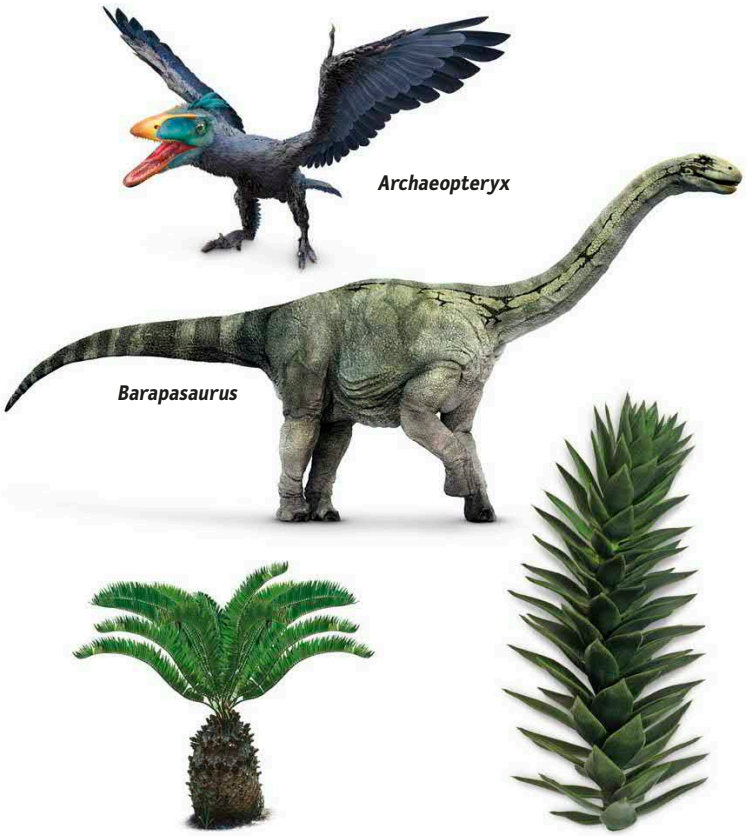

145–66 million years ago

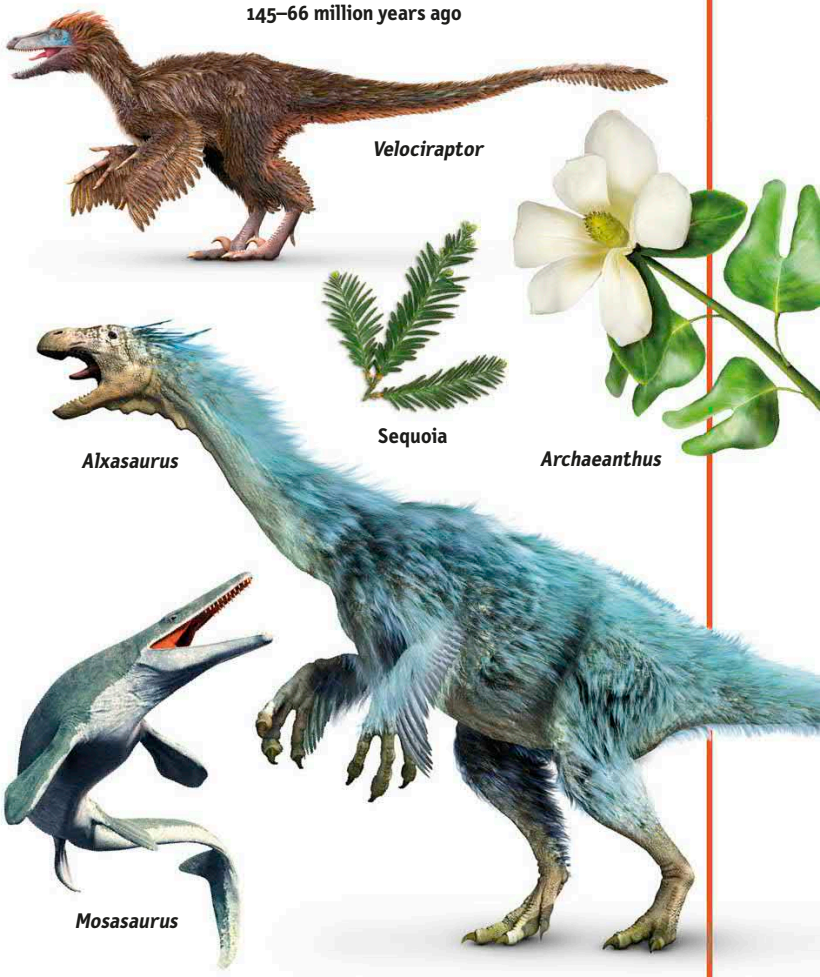

Cretaceous world

During the Cretaceous, the continents drifted toward their current configuration, moving about as fast as your toenails grow. Flowering plants, which had appeared in the Jurassic, evolved into trees and replaced older vegetation. There were now more kinds of dinosaurs than ever, including *Velociraptor*, a small carnivore with lethal, hooklike claws on its hind feet, and *Alxasaurus*, a feathered herbivore.

Types of fossils

Most of what we know about prehistoric life comes from fossils—the remains of ancient organisms entombed in rock. The study of fossils and the sedimentary rocks containing them has enabled scientists to piece together a record of life on Earth.

Natural cast

Fossils can form in various ways. Some of the most common fossils are casts—replicas of a whole body or a body part that formed from minerals building up inside a cavity. This ammonite cast formed when minerals built up inside the animal's spiral shell after its soft inner tissues decayed.

Ammonite cast

How fossils form

Only a tiny fraction of the animals that lived in the past left fossils behind. Fossils of land animals are especially rare because they form only in unusual circumstances. The animal must die in a place where its body is undisturbed and scavengers can't easily consume it. Mud or sand needs to cover the remains, which must stay buried for millions of years as they slowly turn to rock. Geological forces must then bring the fossil back to the surface, where it can be found.

Dinosaur drowns **Flesh decays** **Sediment builds up**

Trace fossil

Fossils that record an organism's activity—such as footprints, burrows, nests, or droppings—are known as trace fossils. Fossil footprints help us understand how animals moved.

Archosaur footprint

Fish fossil

Mineralization

Most fossils involve a process called mineralization. Water seeping through the sediment dissolves remains such as bone and deposits crystallized rock minerals in their place, slowly turning the bones to rock.

Mold

Mold fossils form in the same way as casts, but they preserve an imprint of the body rather than a replica of its shape. Trilobites were common sea creatures that grew by shedding their outer skeletons, leaving millions of fossils behind.

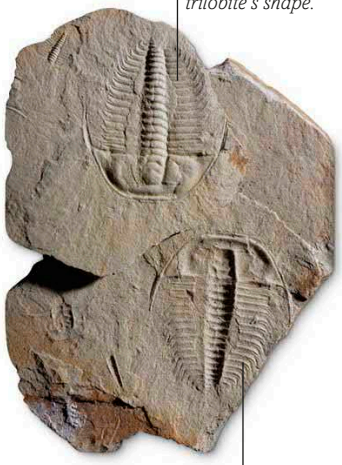

This cast fossil replicates a trilobite's shape.

Trilobite mold

This mold fossil preserves an impression of a trilobite's body.

Petrified tree

Petrification

Whole tree trunks can be fossilized by a process called petrification, which preserves minute details. First, groundwater seeping through buried wood deposits crystals of silica inside tiny spaces. Then, more slowly, minerals gradually replace the wood fibers, turning the trunk to stone.

Amber

A few fossils preserve the whole body of a prehistoric animal. Amber is a transparent yellow material formed from fossilized tree resin. It sometimes contains tiny animals that became trapped in the sticky resin as it oozed from a tree.

Prehistoric fly in amber



Water seeping through the layers replaces the bones with rock minerals, turning the fossil to rock.

Bones turn to rock

Millions of years later, the continents have moved and the dinosaur fossil is no longer under the sea.

Continents move

Glaciers or other processes erode the ground, wearing away the sedimentary rock.

Erosion of surface

Erosion finally reveals the fossil, allowing paleontologists to excavate it.

Discovery

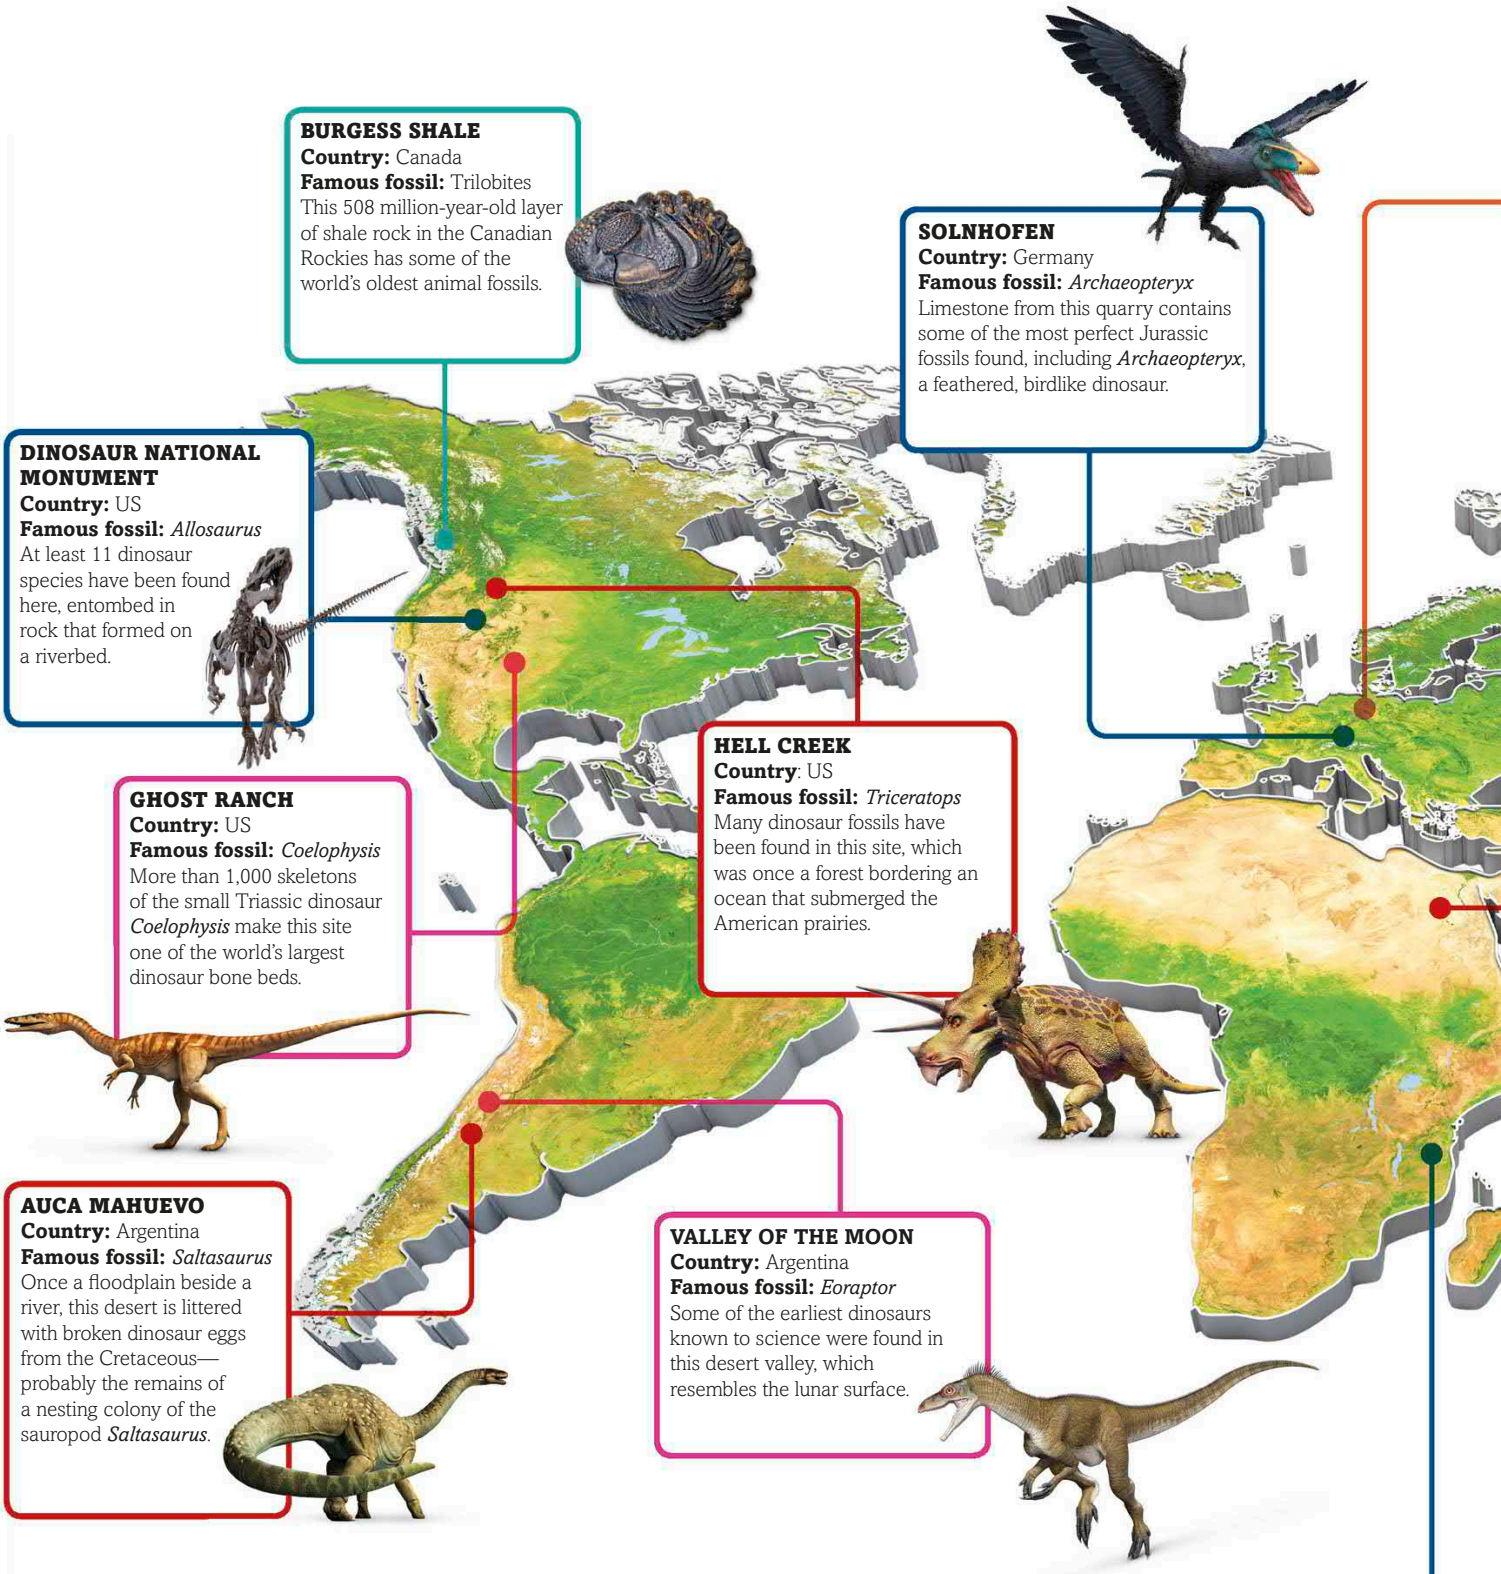

BURGESS SHALE
Country: Canada
Famous fossil: Trilobites
This 508 million-year-old layer of shale rock in the Canadian Rockies has some of the world's oldest animal fossils.

SOLNHOFEN
Country: Germany
Famous fossil: *Archaeopteryx*
Limestone from this quarry contains some of the most perfect Jurassic fossils found, including *Archaeopteryx*, a feathered, birdlike dinosaur.

DINOSAUR NATIONAL MONUMENT
Country: US
Famous fossil: *Allosaurus*
At least 11 dinosaur species have been found here, entombed in rock that formed on a riverbed.

HELL CREEK
Country: US
Famous fossil: *Triceratops*
Many dinosaur fossils have been found in this site, which was once a forest bordering an ocean that submerged the American prairies.

GHOST RANCH
Country: US
Famous fossil: *Coelophysis*
More than 1,000 skeletons of the small Triassic dinosaur *Coelophysis* make this site one of the world's largest dinosaur bone beds.

AUCA MAHUEVO
Country: Argentina
Famous fossil: *Saltasaurus*
Once a floodplain beside a river, this desert is littered with broken dinosaur eggs from the Cretaceous—probably the remains of a nesting colony of the sauropod *Saltasaurus*.

VALLEY OF THE MOON
Country: Argentina
Famous fossil: *Eoraptor*
Some of the earliest dinosaurs known to science were found in this desert valley, which resembles the lunar surface.

Fossil finds

Most fossils are found in sedimentary rock that formed from ancient layers of mud and sand. Sedimentary rock is found worldwide, but a few key sites have especially clear fossils of animals that didn't fully decay, preserving fine details like feathers or skin. Many fossils are found in deserts, not because animals fossilize well in deserts, but because the large expanses of exposed rock make fossils easier to spot.

MESSEL PIT
Country: Germany
Famous fossil: *Darwinius*
The rock in this quarry has preserved incredibly detailed fossils of animals that were poisoned by volcanic gases and then sank into a lake.

LIAONING
Country: China
Famous fossil: *Sinosauropteryx*
The dinosaur fossils of Liaoning are beautifully preserved after being buried under layers of volcanic ash in the late Cretaceous. These fossils show that many dinosaurs had feathers rather than scaly skin like reptiles.

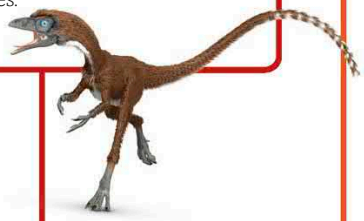

GOBI DESERT
Country: Mongolia
Famous fossil: *Velociraptor*
In the late Cretaceous, the Gobi Desert had conifer forests, lakes, streams, and many dinosaurs, including the meat-eater *Velociraptor*.

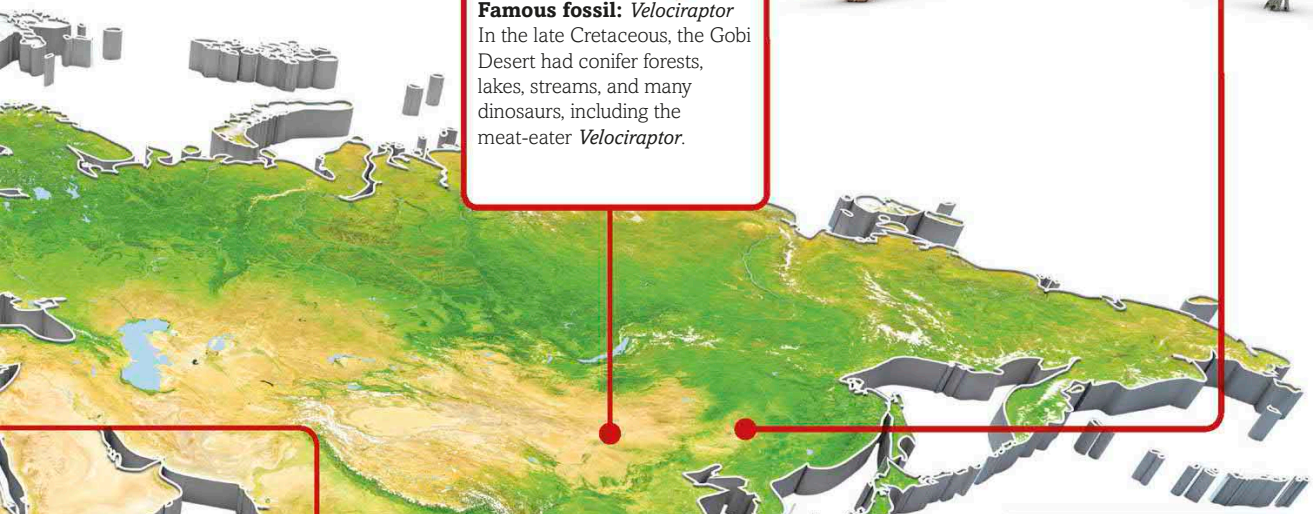

EDIACARA HILLS
Country: Australia
Famous fossil: *Dickinsonia*
Mysterious leaf-shaped imprints found in Australia's desert may be the remains of soft-bodied sea animals that lived 600 million years ago.

BAHARIYA OASIS
Country: Egypt
Famous fossil: *Spinosaurus*
A desert oasis now, this site was once a coastal marsh inhabited by fish-eating *Spinosaurus*—the largest predatory dinosaur known.

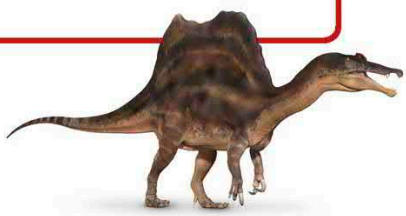

TENDAGURU
Country: Tanzania
Famous fossil: *Kentrosaurus*
The spiky-tailed stegosaur *Kentrosaurus* was found in Jurassic sandstone hills at this site in East Africa.

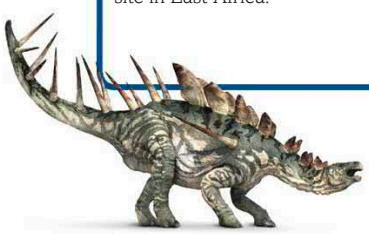



MOUNT KIRKPATRICK
Country: Antarctica
Famous fossil: *Cryolophosaurus*
Most of Antarctica is buried under ice, but this rocky outcrop allowed five Jurassic dinosaurs to be found.

KEY

- Cenozoic
- Cretaceous
- Jurassic
- Triassic
- Cambrian
- Precambrian

Origin of life

Life on Earth began at least 3.5 billion years ago, and possibly more than 4 billion years ago. These oldest-known life forms were microscopic single cells that lived in water—tiny capsules of watery fluid containing the complex chemicals vital to all types of life. How these cells formed is still not known, but the process was probably fueled by the heat and chemical energy of hot springs, either on land or on the deep ocean floor.

Early Earth

Planet Earth was formed from the rock and dust that orbited the newly formed Sun. As the planet grew in size, its gravity attracted more rocks and comets, which contained water and the chemical elements needed for life. All the rocks impacting the growing planet made it heat up until it melted. Later, the planet cooled enough for liquid water to settle on the surface. Even today, liquid water is vital to all forms of life.

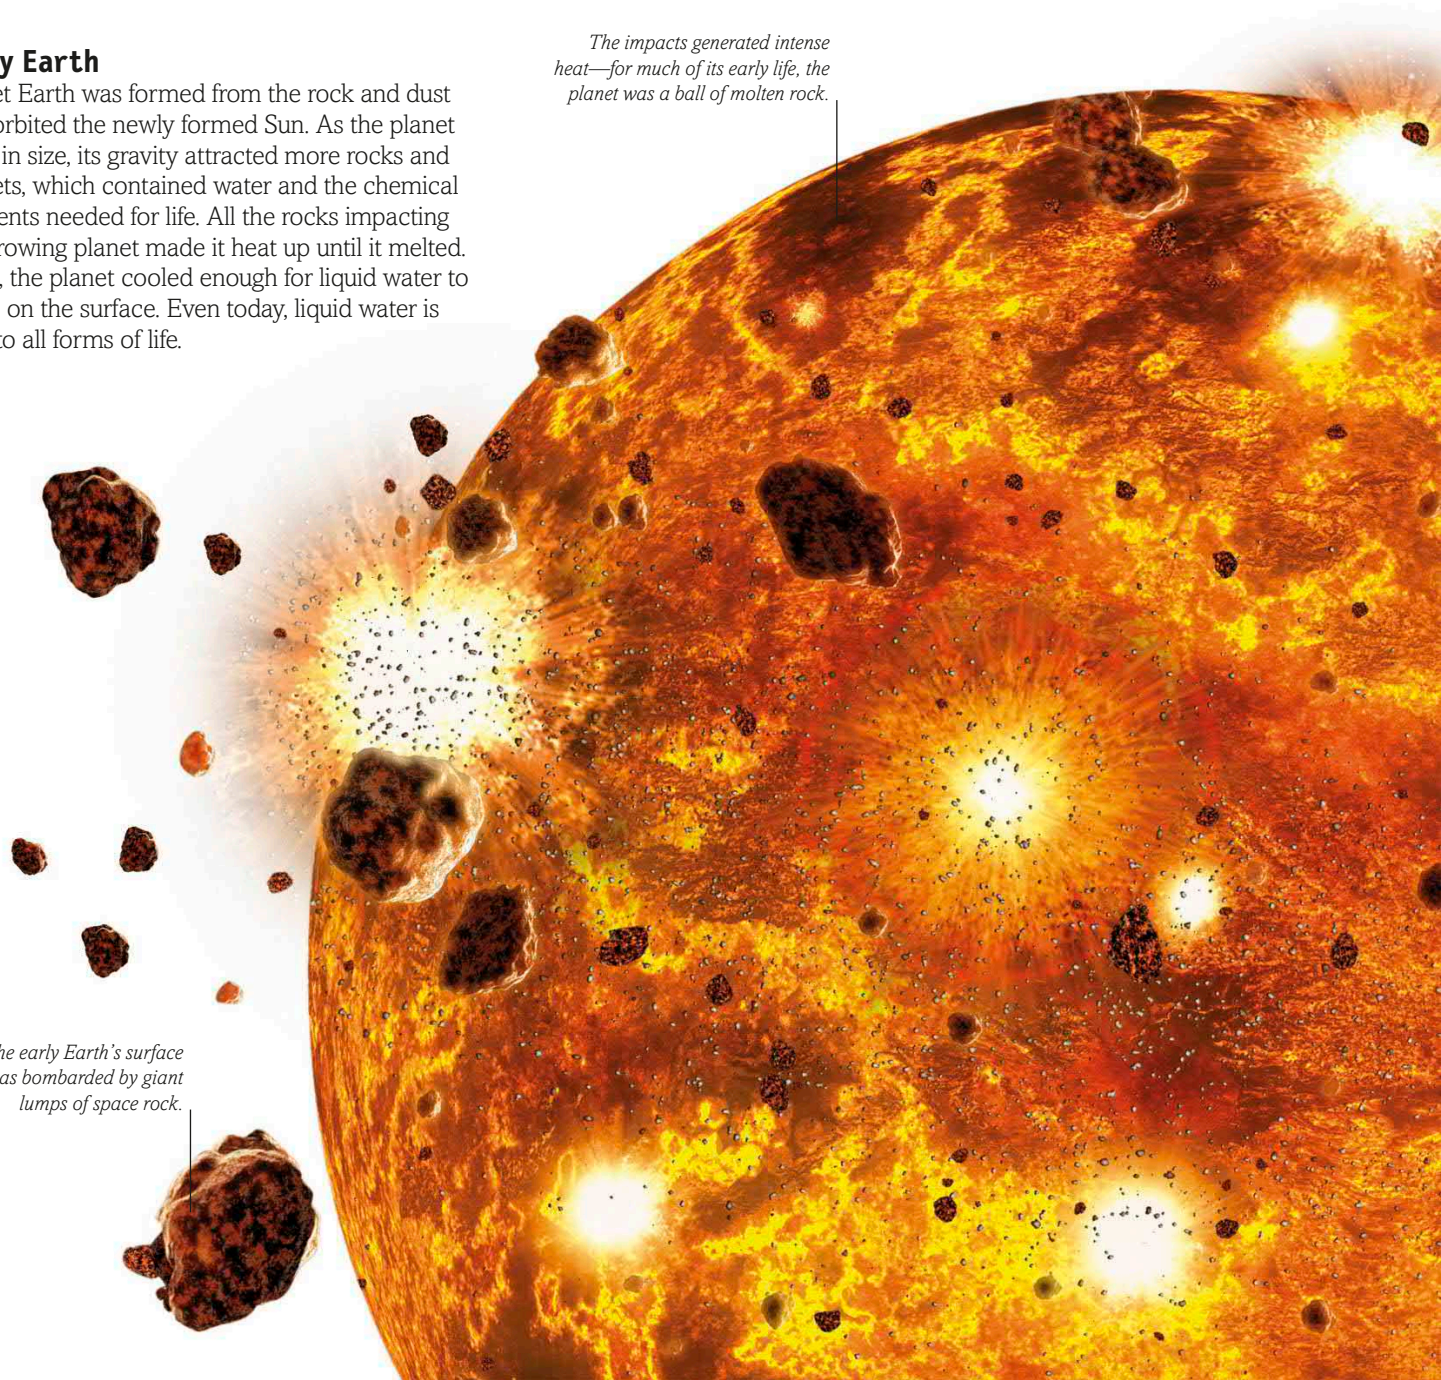

The impacts generated intense heat—for much of its early life, the planet was a ball of molten rock.

The early Earth's surface was bombarded by giant lumps of space rock.

First life

The first living organisms must have formed in water containing simple chemicals dissolved from rocks. Today, this type of chemical-rich water erupts from hot springs on the ocean floor and in places like Yellowstone National Park. The water contains microscopic organisms that resemble some of the earliest living things, so it is likely that life began in such places. It is this microbial life that gives Grand Prismatic Spring its vibrant colors.

Grand Prismatic Spring, Yellowstone National Park

The hot spring is fringed with microbial life.

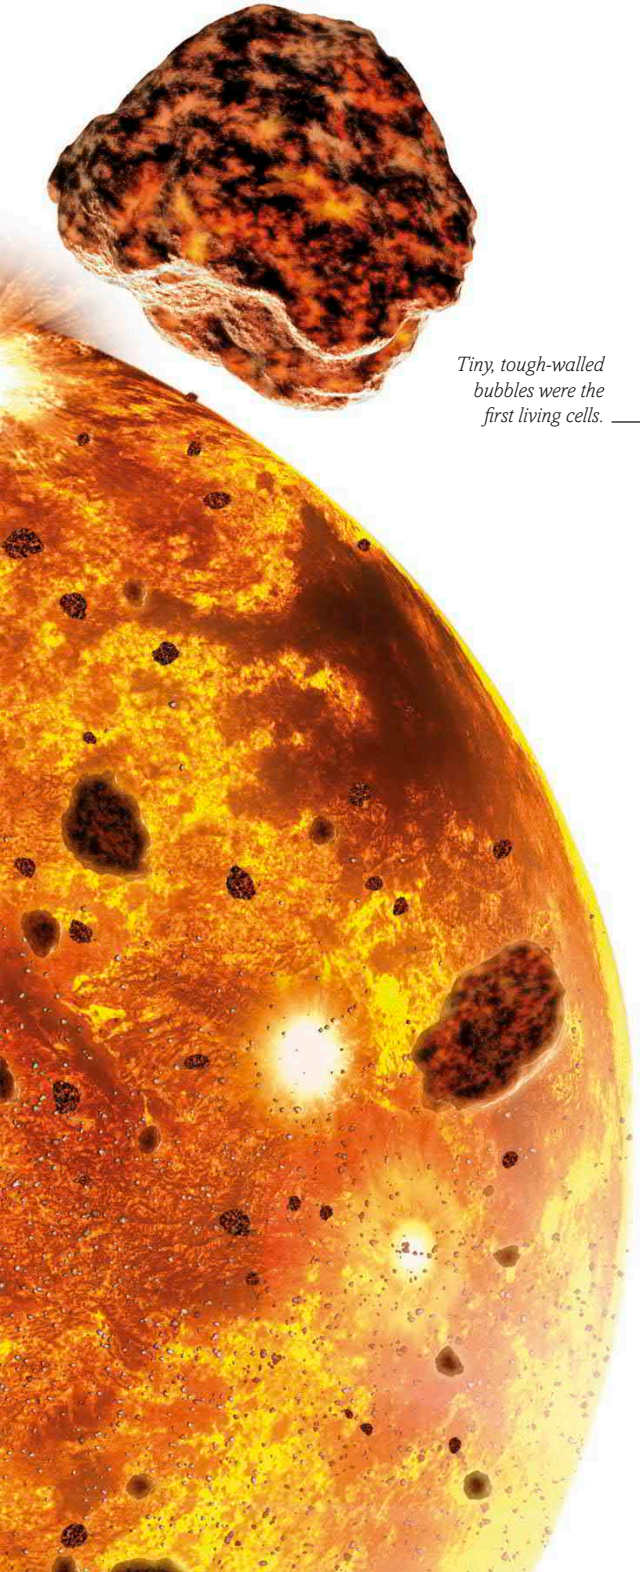

Tiny, tough-walled bubbles were the first living cells.

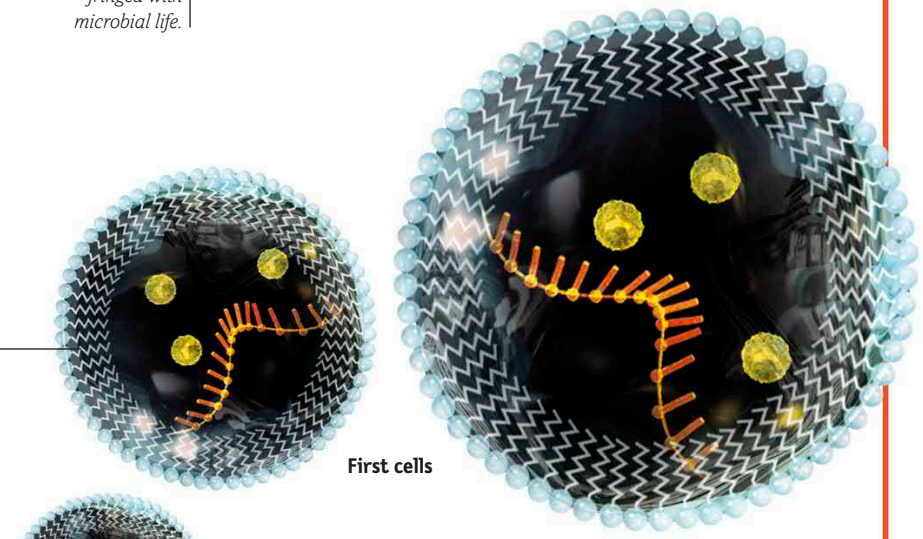

First cells

Living cells

Life involves chemical reactions that occur in microscopic, tough-walled containers called cells. The earliest living cells were simple bags of fluid, like modern bacteria. They soaked up energy and used it to turn simple chemicals into complex substances vital to life, such as proteins. This helped them grow, multiply, and form large colonies like the ones that live around hot springs today.

Evidence of early life

The oldest-known rocks on Earth contain microscopic structures that have been identified as fossil Archaea—organisms similar to bacteria. The rocks, which formed on the ocean floor, are at least 3.8 billion years old. But much clearer evidence of early life exists in the form of fossil stromatolites. Dating from about 3.4 billion years ago, these were once colonies of microbes called cyanobacteria that built up in dome-shaped layers. These layers are clearly visible in the fossils.

Stromatolite fossil

GAME-CHANGERS

The shallow waters of Shark Bay in Western Australia support a life form that has existed on Earth for billions of years—stromatolites. These muddy-looking lumps have been built up by cyanobacteria—simple microbes that turn air and water into sugar using sunlight. This process of photosynthesis creates most of the food that animals need and releases the oxygen they breathe.

When cyanobacteria evolved in the oceans more than 2.5 billion years ago, there was very little oxygen in the air. Over millions of years, they pumped out so much that it now makes up more than a fifth of the atmosphere. This was vital for the evolution of animals, which need oxygen to turn food into energy. So all the animals that have ever lived owe their existence to these microbes. Free-living cyanobacteria are still widespread in oceans and on land, but thriving stromatolites are rare because they were ideal food for some of the animals that evolved in the world they had created. The ones in Shark Bay survive because few animals can live in the very salty water of its lagoons.

Evolution and extinction

Fossils reveal how life has changed over time. This was not fully understood until the 19th century, when fossils became important evidence supporting the theory of evolution by natural selection. Developed primarily by English scientist Charles Darwin, this theory showed that the individuals in a species vary in their ability to cope with the hardships of life—some survive and breed, while others do not. As a result, species gradually change over time as they adapt to the changing world. New species evolve, and older ones may die out completely, becoming extinct.

Fossil evidence

When the first fossil of *Archaeopteryx* showing wing feathers was discovered in 1861, it was seen as powerful evidence in favor of the theory that living things evolve over time.

Bony tail › At first sight, this 150-million-year-old fossil of an *Archaeopteryx* looks very like a living bird, with broad, feathered wings. But it had a long, bony tail like an extinct dinosaur. This combination of features does not exist in any modern animal.

Natural selection

Every animal is different from its parents. This natural variation produces individuals with different strengths and weaknesses, so some are more likely to survive. An insect with more effective camouflage than its cousins will be more likely to evade hungry birds, breed, and pass on its advantages to its young, Meanwhile, its less well camouflaged relatives may die out.

The jagged edges and pattern of lines add to the leaf insect's superb camouflage.

Leaf insect

Archaeopteryx

Wing feathers › The fossils of *Archaeopteryx* preserve traces of feathers that are very similar to those of modern birds. But the fossils also show that it had the teeth and bones of a theropod dinosaur.

***Archaeopteryx* fossil**

New species

If birds fly to a new habitat, such as an oceanic island, they may face difficulties in finding food. Those that survive will be the ones that, by some stroke of luck, have features that help them cope with the new conditions. If they manage to breed, their young will tend to inherit these features. Over many generations, this may give rise to an island form that is clearly different from its mainland ancestors. This process creates new species.

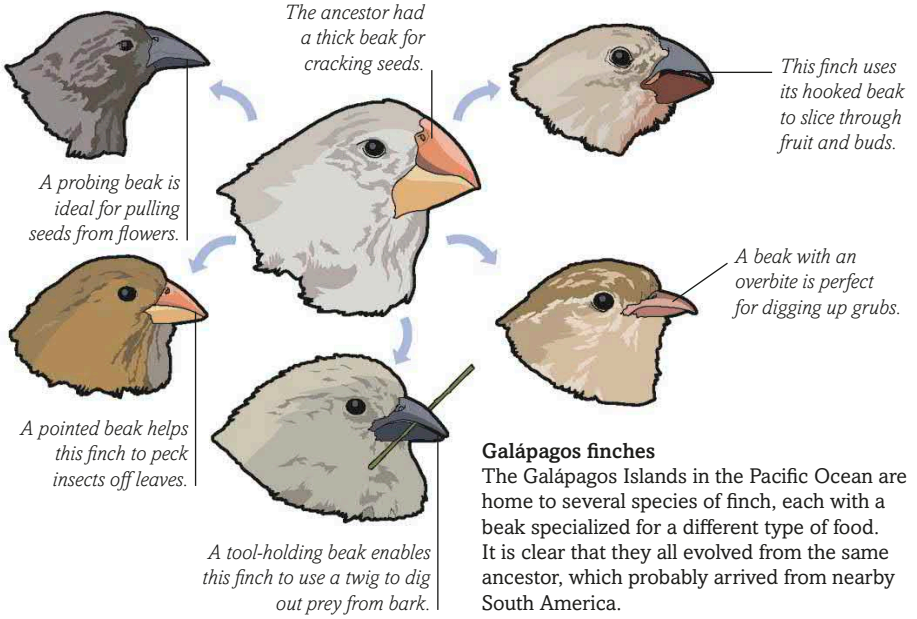

Galápagos finches
The Galápagos Islands in the Pacific Ocean are home to several species of finch, each with a beak specialized for a different type of food. It is clear that they all evolved from the same ancestor, which probably arrived from nearby South America.

Lost ancestors

The processes of evolution and extinction cause a relentless turnover of species, with new ones evolving as others die out. This means that, over the past 500 million years, more than 90 percent of all species on Earth have vanished. We only know about these life forms because their remains have survived as fossils.

Trilobite fossil

Mass extinctions

Sometimes a catastrophic event changes the world so radically that very few animals can survive it. This is called a mass extinction. Since life began, there have been five major mass extinctions. Each one wiped out much of the life on Earth at the time, allowing new species to evolve and take over.

ORDOVICIAN (440 MYA)
Up to 60 percent of marine species perished in a mass extinction at the end of the Ordovician Period.



DEVONIAN (358 MYA)
The Late Devonian extinction mainly affected oceanic life, especially in shallow coastal seas.

PERMIAN (250 MYA)
The Permian Period ended with a global catastrophe that almost wiped out all life on Earth.

TRIASSIC (200 MYA)
Many of the animals that coexisted with early dinosaurs died out at the end of the Triassic Period.

CRETACEOUS (66 MYA)
This mass extinction destroyed the pterosaurs, giant dinosaurs, and most of the marine reptiles.

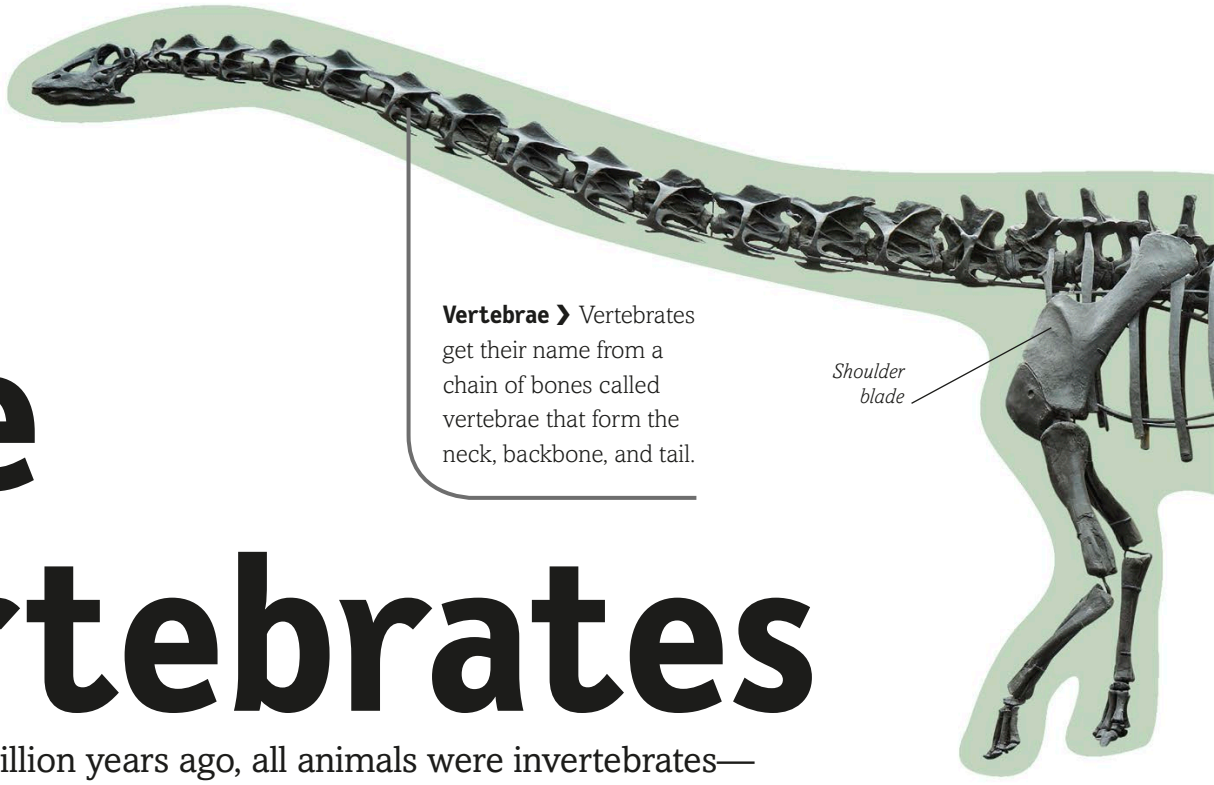

Vertebrae ❯ Vertebrates get their name from a chain of bones called vertebrae that form the neck, backbone, and tail.

The vertebrates

Until about 530 million years ago, all animals were invertebrates—creatures with no internal jointed skeletons. But then new types of animals appeared in the oceans, with bodies strengthened by a springy rod—the beginnings of a backbone. These evolved into fish—the first true vertebrates and the ancestors of amphibians, mammals, reptiles, and birds.

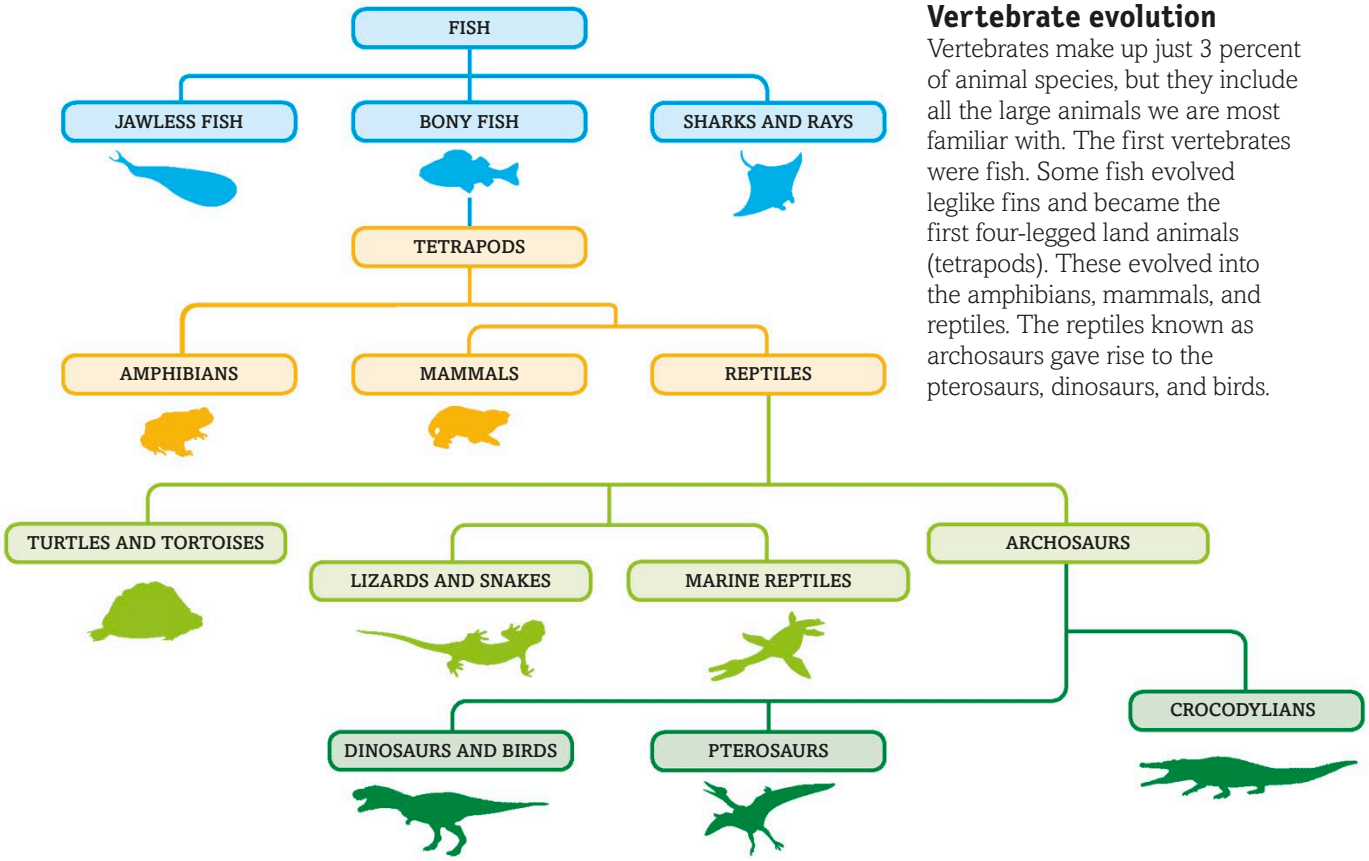

Vertebrate evolution

Vertebrates make up just 3 percent of animal species, but they include all the large animals we are most familiar with. The first vertebrates were fish. Some fish evolved leglike fins and became the first four-legged land animals (tetrapods). These evolved into the amphibians, mammals, and reptiles. The reptiles known as archosaurs gave rise to the pterosaurs, dinosaurs, and birds.

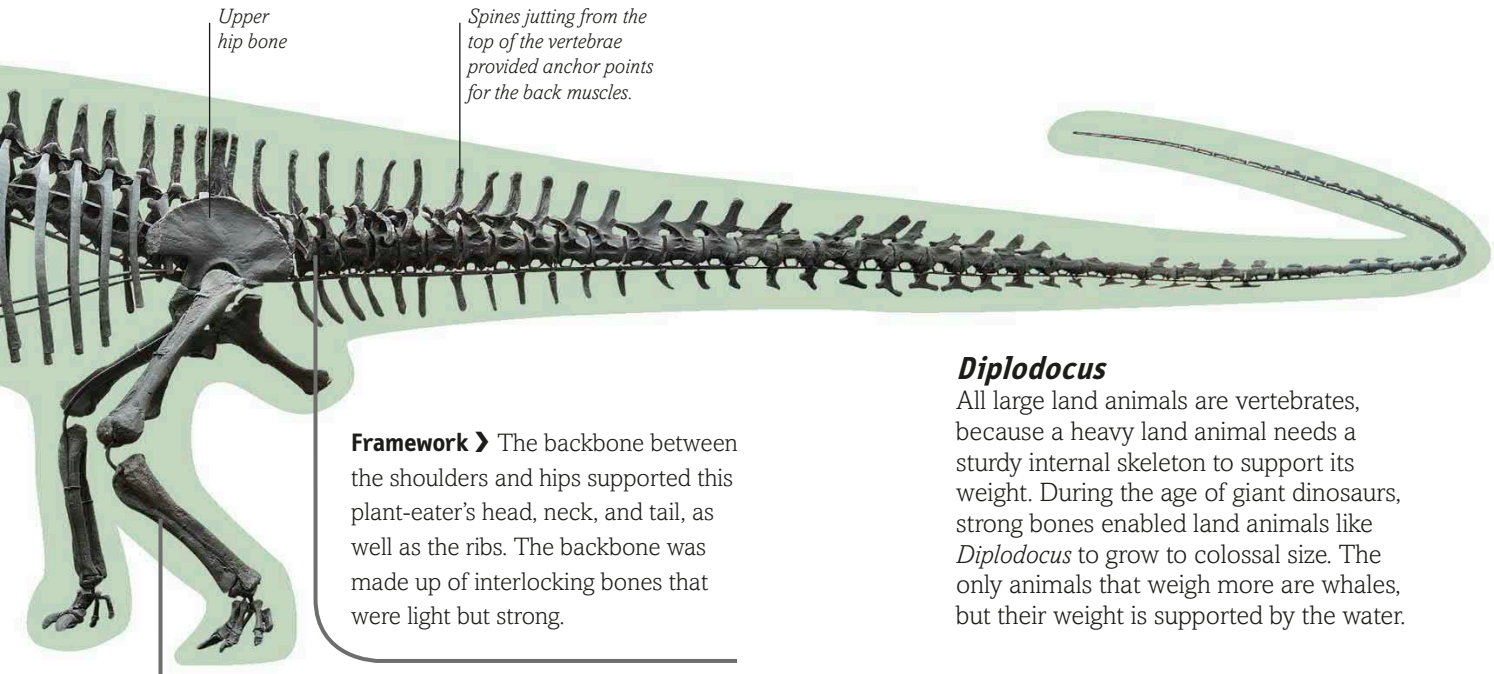

Framework ❯ The backbone between the shoulders and hips supported this plant-eater's head, neck, and tail, as well as the ribs. The backbone was made up of interlocking bones that were light but strong.

Leg bones ❯ The immense weight of this giant dinosaur was supported by massive leg bones, linked to the backbone by strong, mobile joints.

Diplodocus

All large land animals are vertebrates, because a heavy land animal needs a sturdy internal skeleton to support its weight. During the age of giant dinosaurs, strong bones enabled land animals like *Diplodocus* to grow to colossal size. The only animals that weigh more are whales, but their weight is supported by the water.

Reptile

Archosaur

Mammal

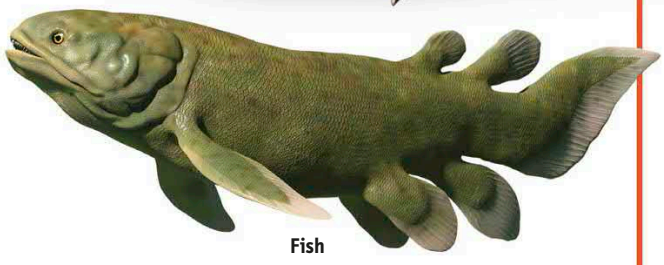
Fish

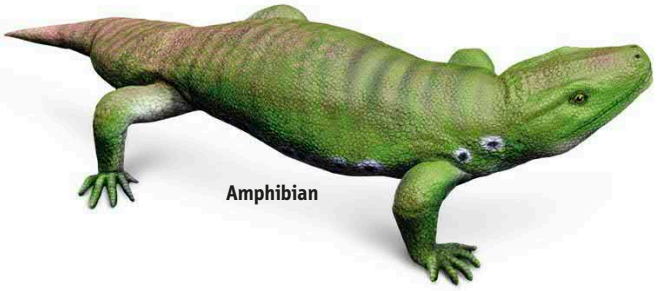
Amphibian

Types of vertebrate

We usually think of the vertebrates as fish, amphibians, reptiles, birds, and mammals. But the birds can also be seen as the most successful and diverse living group of archosaurs, a branch of the reptiles that also included their closest relatives—the extinct dinosaurs.

What is a dinosaur?

Dinosaurs were a diverse and successful group of reptiles that dominated life on land for about 140 million years. Humans, for comparison, have existed for less than 1 million years. Ranging in size from animals no bigger than pigeons to lumbering giants the size of trucks, they were reptiles, but very different from modern reptiles. Dinosaurs can be split into two groups: lizard-hipped dinosaurs (saurischians) and bird-hipped dinosaurs (ornithischians). These can be split further, as shown.

Saurischians
Saurischian ("lizard hipped") refers to the typical saurischians that had hip bones like those of lizards. This group included the sauropodomorph plant-eaters. It may also have included the meat-eating theropods, but some scientists think that theropods are more closely related to ornithischians.



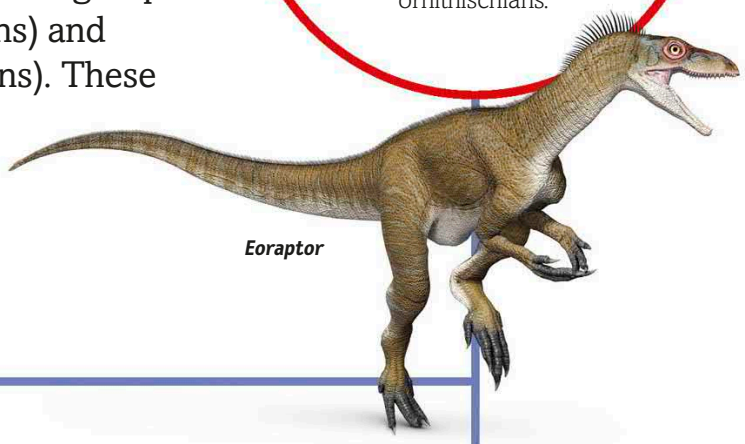

Eoraptor

Ancestral dinosaurs
The first dinosaurs were small, agile animals that ran on two legs—they would have looked like this *Marasuchus*, an early, dinosaurlike archosaur. During the late Triassic Period, early dinosaurs evolved in different ways. Most became specialized for eating plants, but some were to become dedicated hunters.

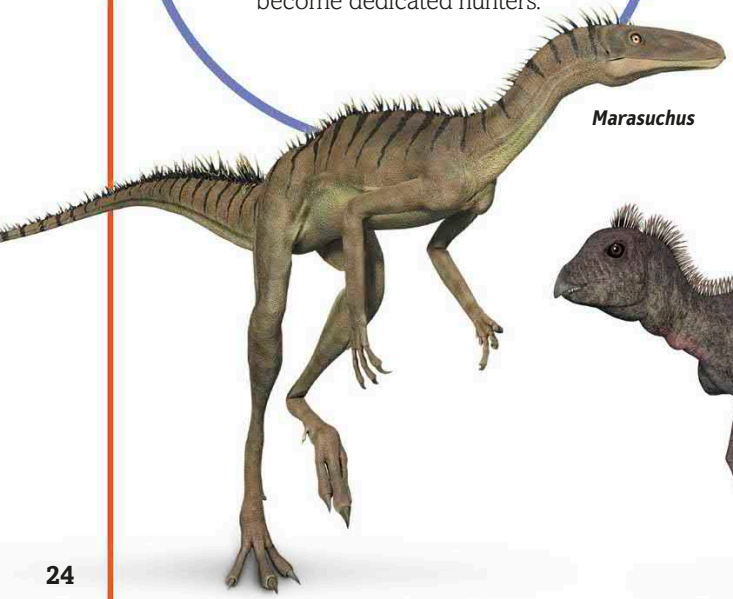

Marasuchus

Ornithischians
This group is made up of beaked plant-eaters with relatively short necks. The name means "bird hipped," because their hip bones resembled those of birds (even though birds were small saurischians and so not closely related).

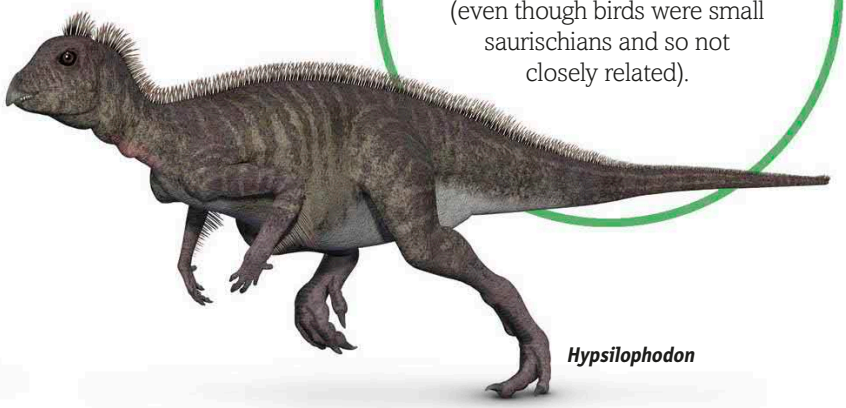

Hypsilophodon



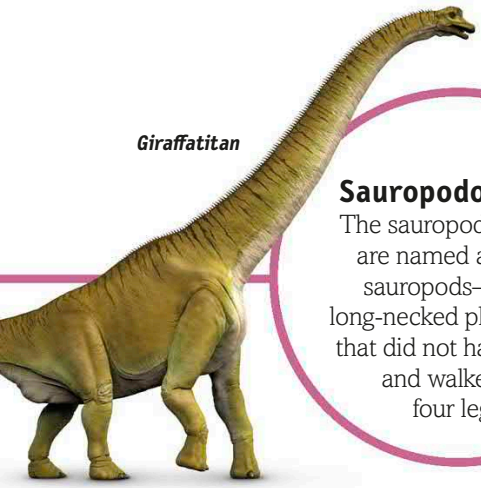

Giraffatitan

Sauropodomorphs
The sauropodomorphs are named after the sauropods—giant, long-necked plant-eaters that did not have beaks and walked on four legs.

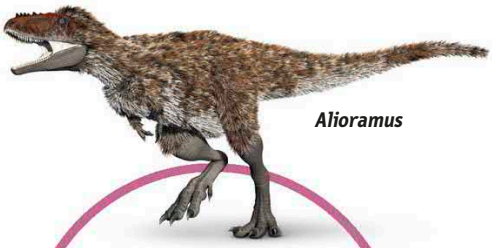

Alioramus

Theropods
Theropods were nearly all meat-eaters that walked on two legs. Some were huge, powerful hunters, but the theropods also include birds.

Marginocephalians

Ceratopsians
Most ceratopsians had horned heads and big, bony frills extending from the back of their skulls. They were plant-eaters with hooked, parrotlike beaks.

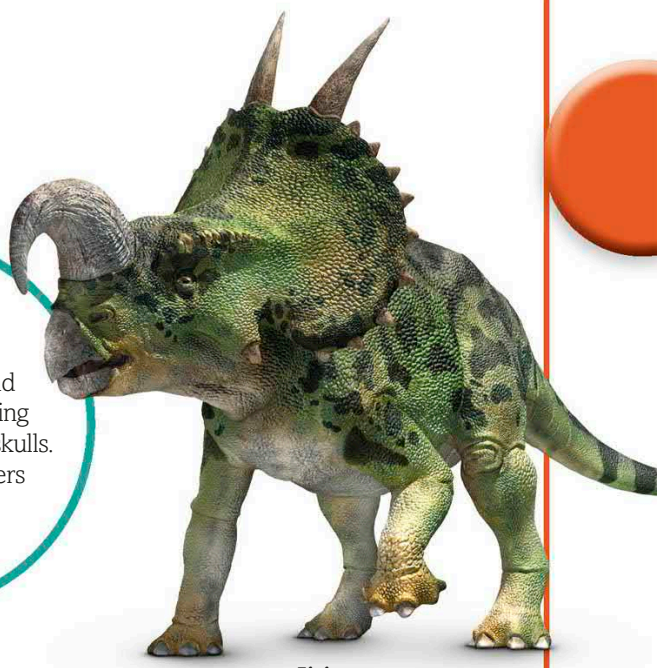

Einiosaurus

Pachycephalosaurs
These dinosaurs had very thick skulls. They walked on two legs and probably ate a variety of plant and animal food.

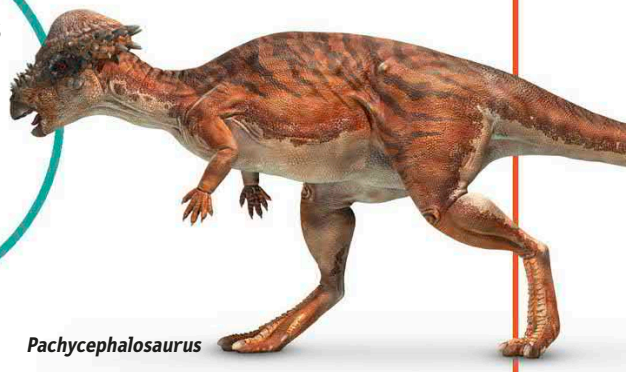

Pachycephalosaurus

Ornithopods
The ornithopods were a group of beaked plant-eaters that mostly walked on two feet, but the biggest ones supported some of their weight on their hands.

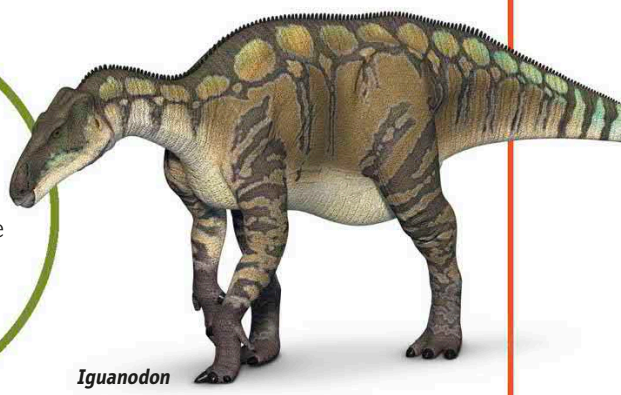

Iguanodon

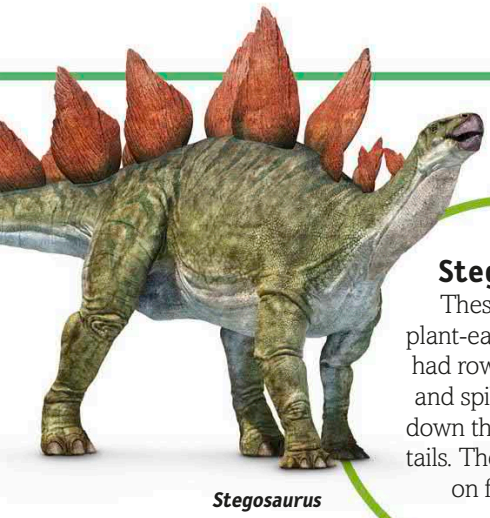

Stegosaurus

Stegosaurs
These beaked, plant-eating dinosaurs had rows of tall plates and spikes extending down their backs and tails. They all walked on four legs.

Ankylosaurs
Sometimes called tank dinosaurs, these plant-eating heavyweights had thick body armor for defense against large theropod predators.

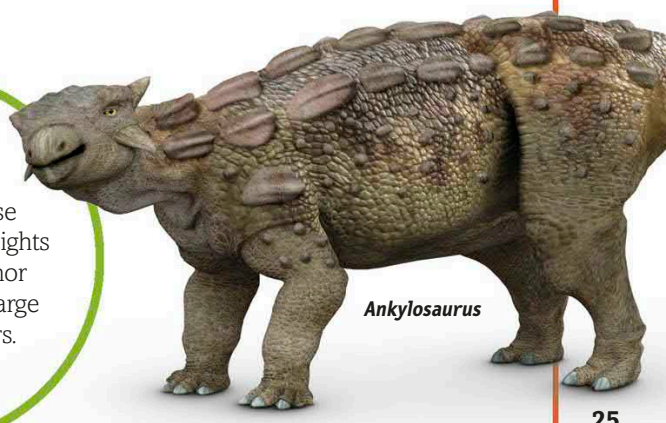

Ankylosaurus

Thyreophorans

Inside a dinosaur

Although soft tissues of animals' bodies seldom fossilize, we can still figure out what dinosaurs were like on the inside. Dinosaurs were vertebrates, and all vertebrates share the same basic body plan, with powerful muscles connected to a jointed skeleton and internal organs that included a heart, lungs, stomach, intestines, and brain. Dinosaurs were once thought to be cold-blooded, lumbering reptiles, but we now think that many were as quick-witted and active as birds, and some may even have been warm-blooded.

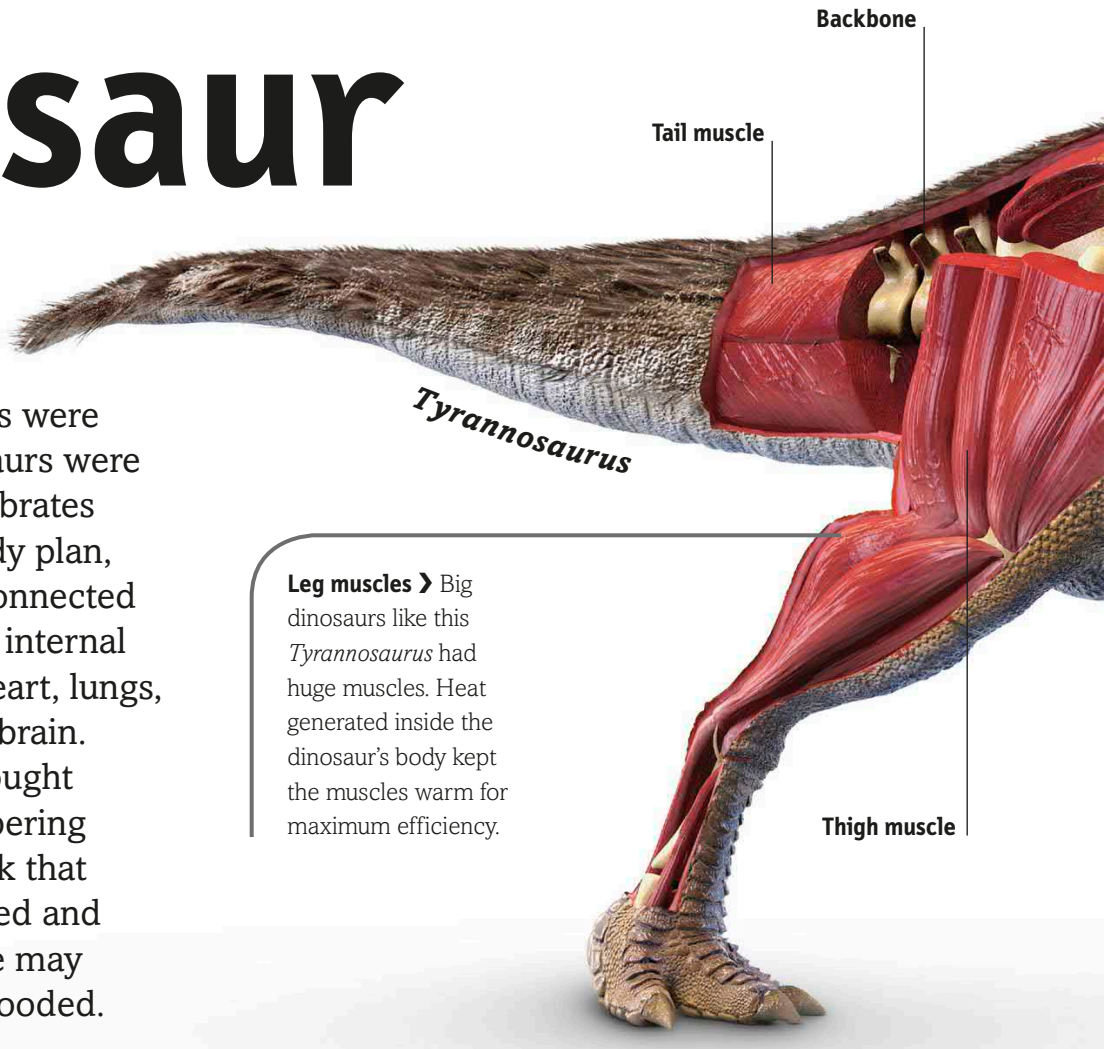

Leg muscles › Big dinosaurs like this *Tyrannosaurus* had huge muscles. Heat generated inside the dinosaur's body kept the muscles warm for maximum efficiency.

Dinosaur features

The brain of a dinosaur like Citipati *was adapted for sharp senses, not intelligence.*



Brain The brains of extinct dinosaurs were relatively small, and some were tiny. Most would not have been as intelligent as modern birds.

The closest living relatives of extinct dinosaurs have four-chambered hearts.



Heart Pumping blood around the body of a giant dinosaur required a powerful four-chambered heart—similar to a human heart, but a lot bigger.

Air sacs (blue) stored air and pumped it back through the lungs (red).

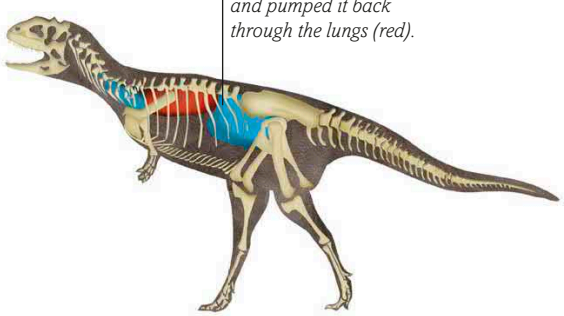

Lungs Fossil evidence shows that dinosaurs had lungs like those of modern birds, which are more efficient than the lungs of mammals.

Skeleton ❯ The dinosaur's weight was supported by a strong skeleton, but many bones had air-filled cavities that reduced their weight.

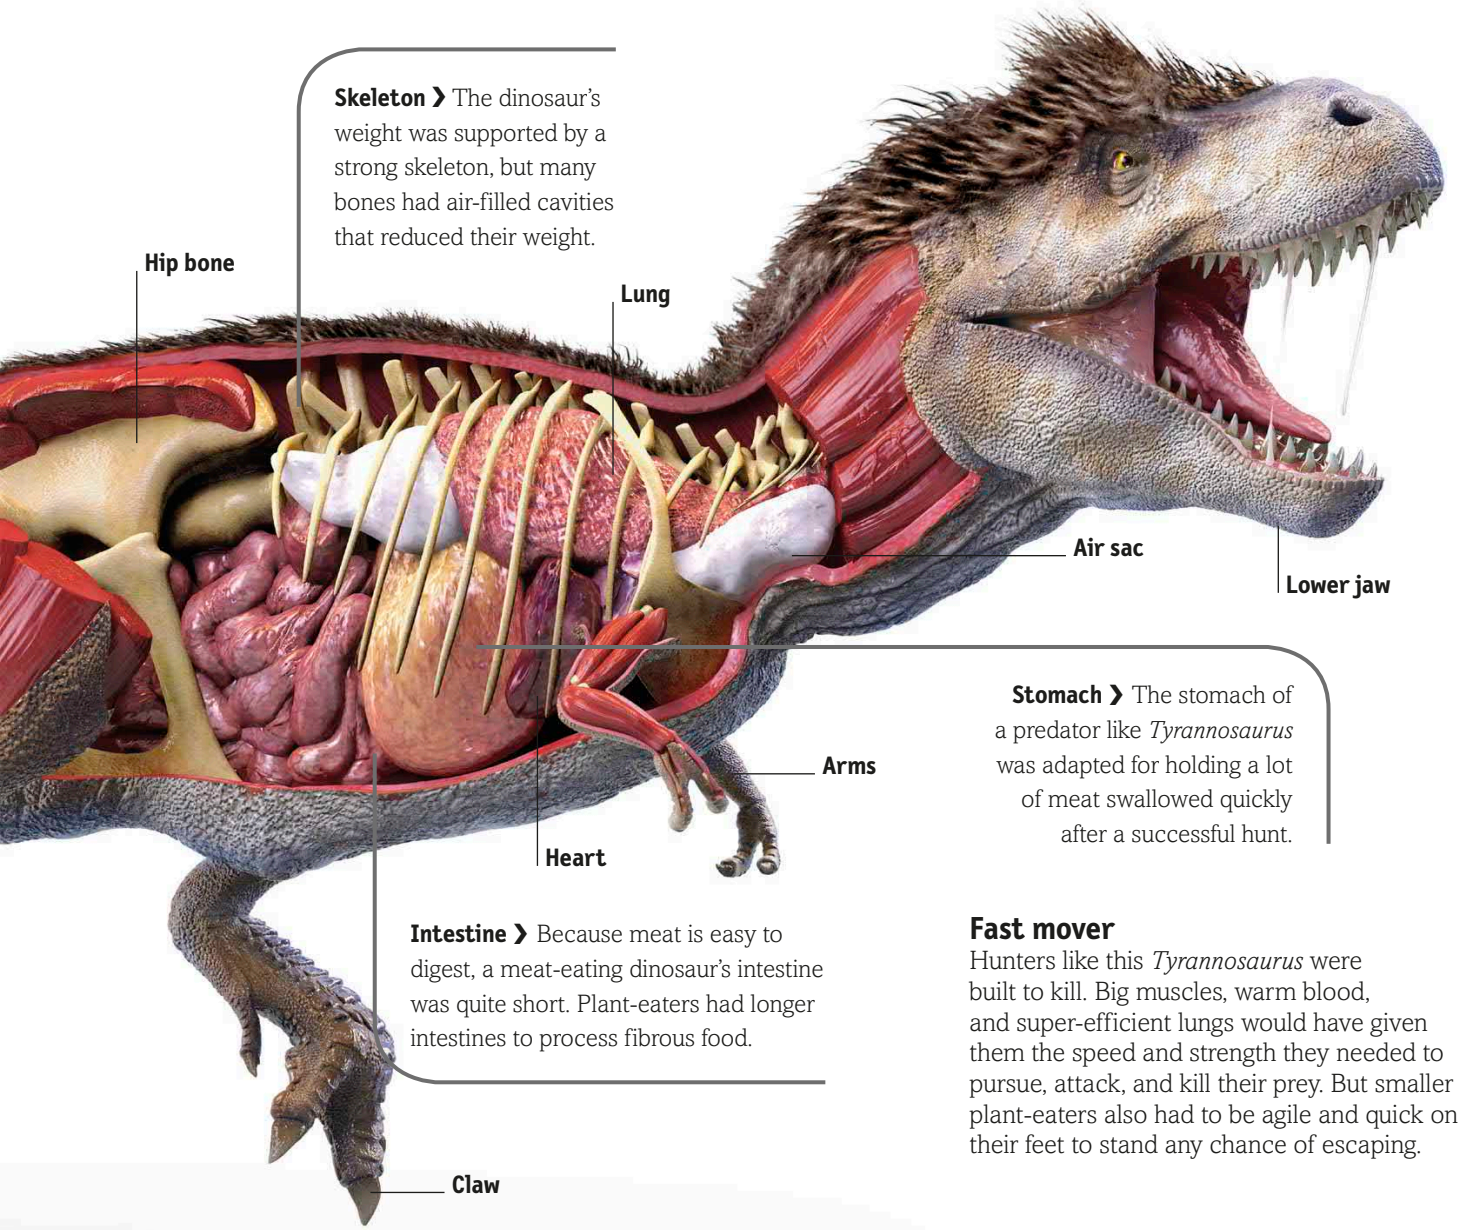

Stomach ❯ The stomach of a predator like *Tyrannosaurus* was adapted for holding a lot of meat swallowed quickly after a successful hunt.

Intestine ❯ Because meat is easy to digest, a meat-eating dinosaur's intestine was quite short. Plant-eaters had longer intestines to process fibrous food.

Fast mover

Hunters like this *Tyrannosaurus* were built to kill. Big muscles, warm blood, and super-efficient lungs would have given them the speed and strength they needed to pursue, attack, and kill their prey. But smaller plant-eaters also had to be agile and quick on their feet to stand any chance of escaping.

The eyes of some predators may have been adapted for night vision, like a cat's.



Vision Their skull anatomy shows that many extinct dinosaurs had sharp senses. Predators like *Tyrannosaurus* would have had excellent vision, which may have been as acute as a modern eagle's.

The pillarlike legs helped support the weight.



Stance Like birds—but unlike modern reptiles—dinosaurs stood with their legs directly beneath their bodies. This helped to support their weight.

Scales were made of tough keratin, like human fingernails.



Scales The skins of most big dinosaurs were protected by scales. Many small, feathered dinosaurs also had scales on parts of their bodies.

Fluffy feathers like this one were for insulation rather than flight.



Feathers Many small theropods and even some big ones were covered in feathers. These kept them warm and allowed some of them to fly.

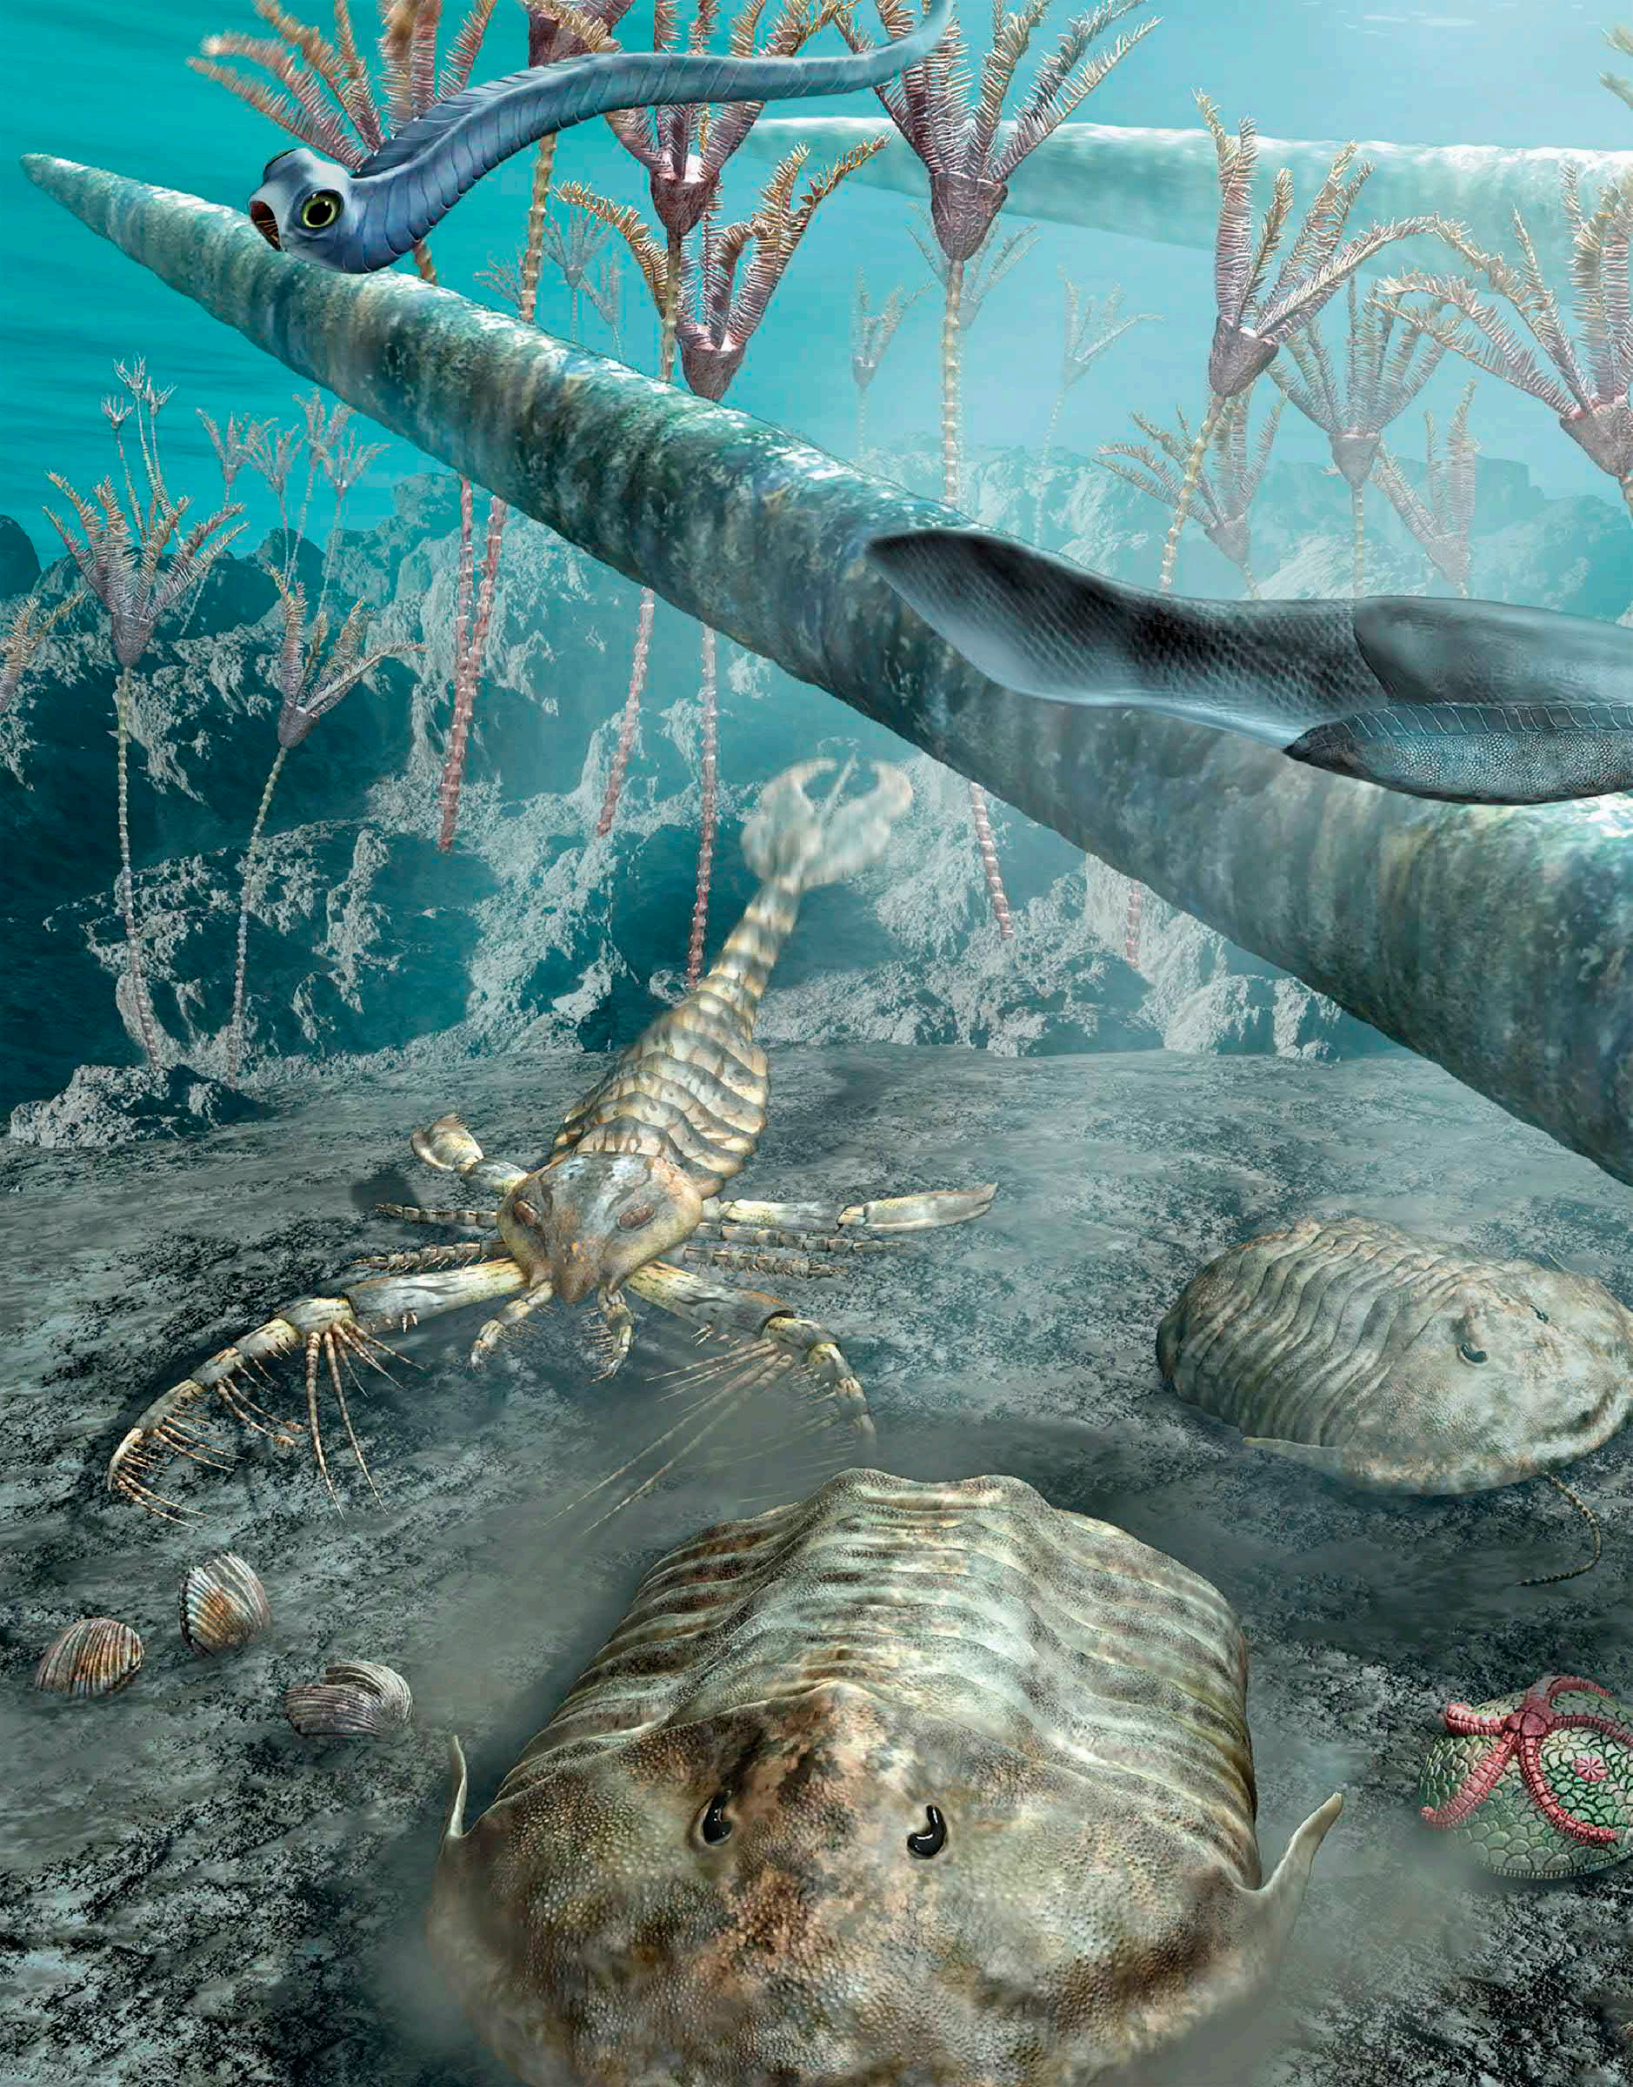

BEFORE THE DINOSAURS

The first animals

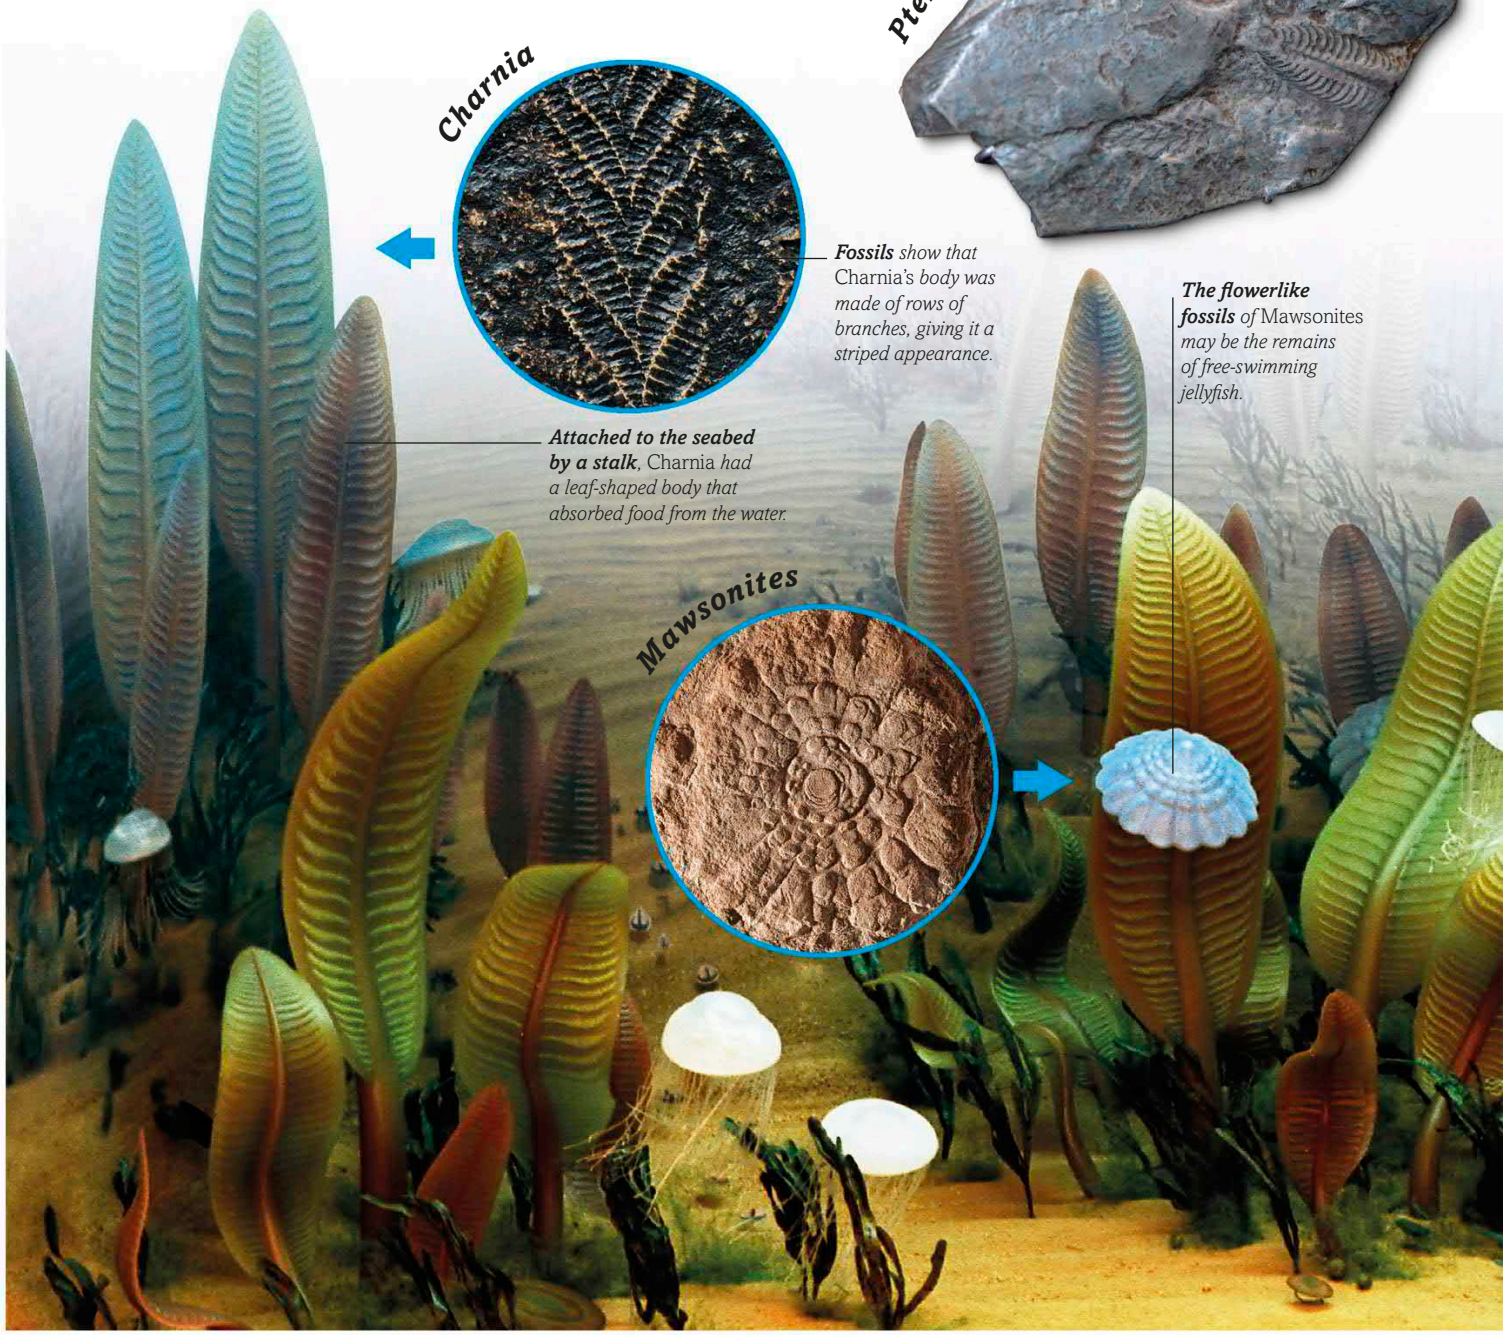

Scientists once thought that the first animals evolved about 542 million years ago at the start of the Cambrian Period. The huge span of Earth history before this, known as the Precambrian Period, was thought to be almost lifeless apart from bacteria and similar microscopic single-celled organisms. But in 1957, a fossil was discovered in the Precambrian rocks of Charnwood Forest in England. It was a multicelled life form, now known as ***Charnia***. Scientists then realized that fossils of similar organisms found in the

Ediacara Hills of Australia in 1946 were also Precambrian, and more than 600 million years old. These were some of the first animals on Earth. Since then, similar fossils have been found in North America, Africa, and Russia. Many, including *Charnia*, were animals that lived rooted on the seabed, like modern corals. Others, like ***Spriggina***, were free-living animals that could roam or swim in search of food, and some, including ***Dickinsonia***, were so unlike any modern animal that their nature and way of life are still a mystery.

Built to survive

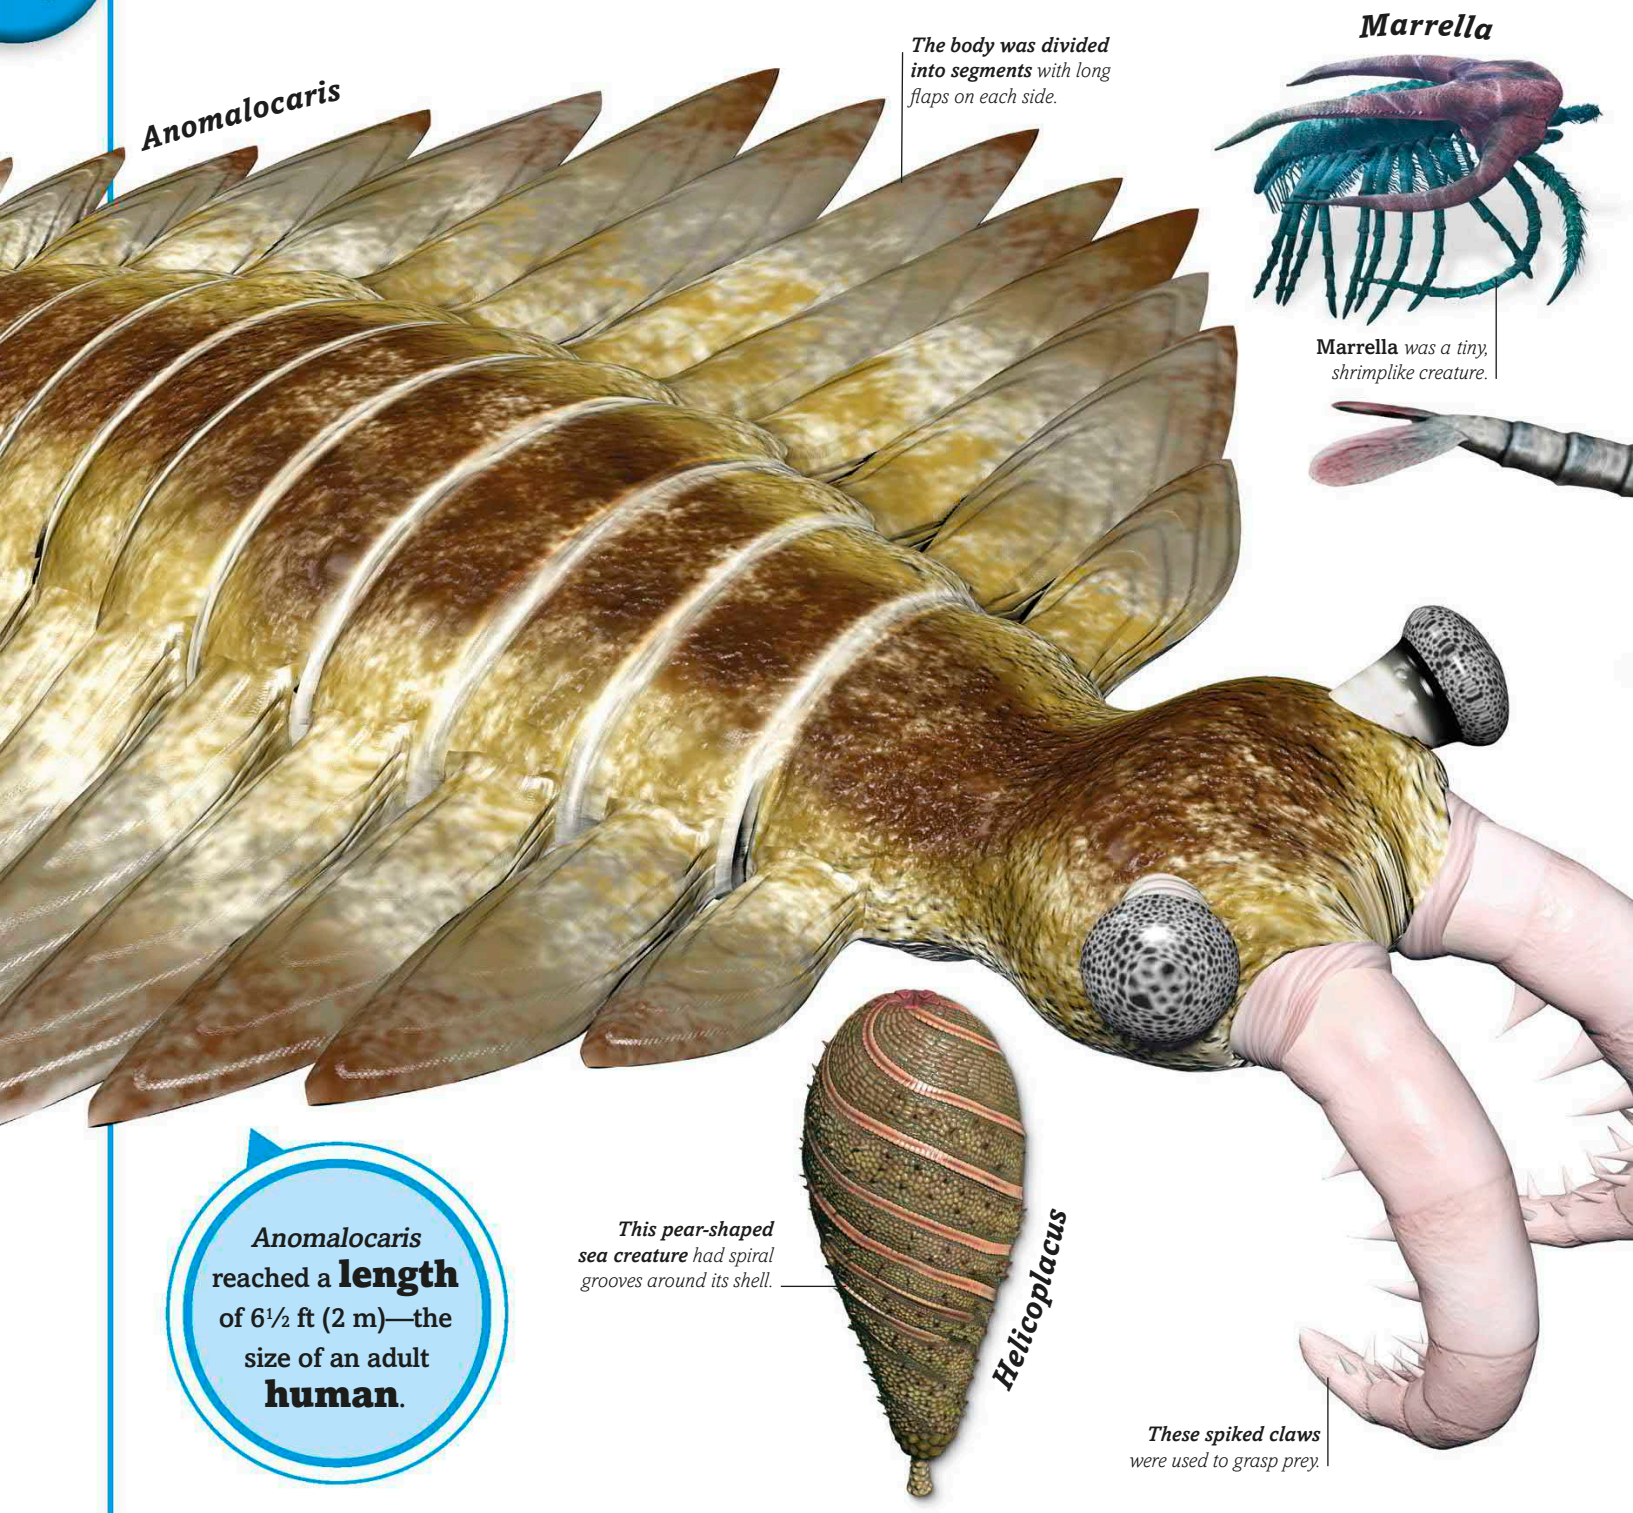

Anomalocaris reached a **length** of 6½ ft (2 m)—the size of an adult **human**.

The earliest animals that lived in ancient oceans had soft bodies, like modern jellyfish. But during the Cambrian Period, from 542 million years ago, new types of animals appeared. They had hard shells, spines, and tough external skeletons, such as those of ***Anomalocaris*** and ***Marrella***. These hard parts supported their bodies and helped protect them from enemies. When the animals died, their soft parts were eaten or rotted, but their shells and skeletons were often preserved as fossils. The appearance of many fossils in

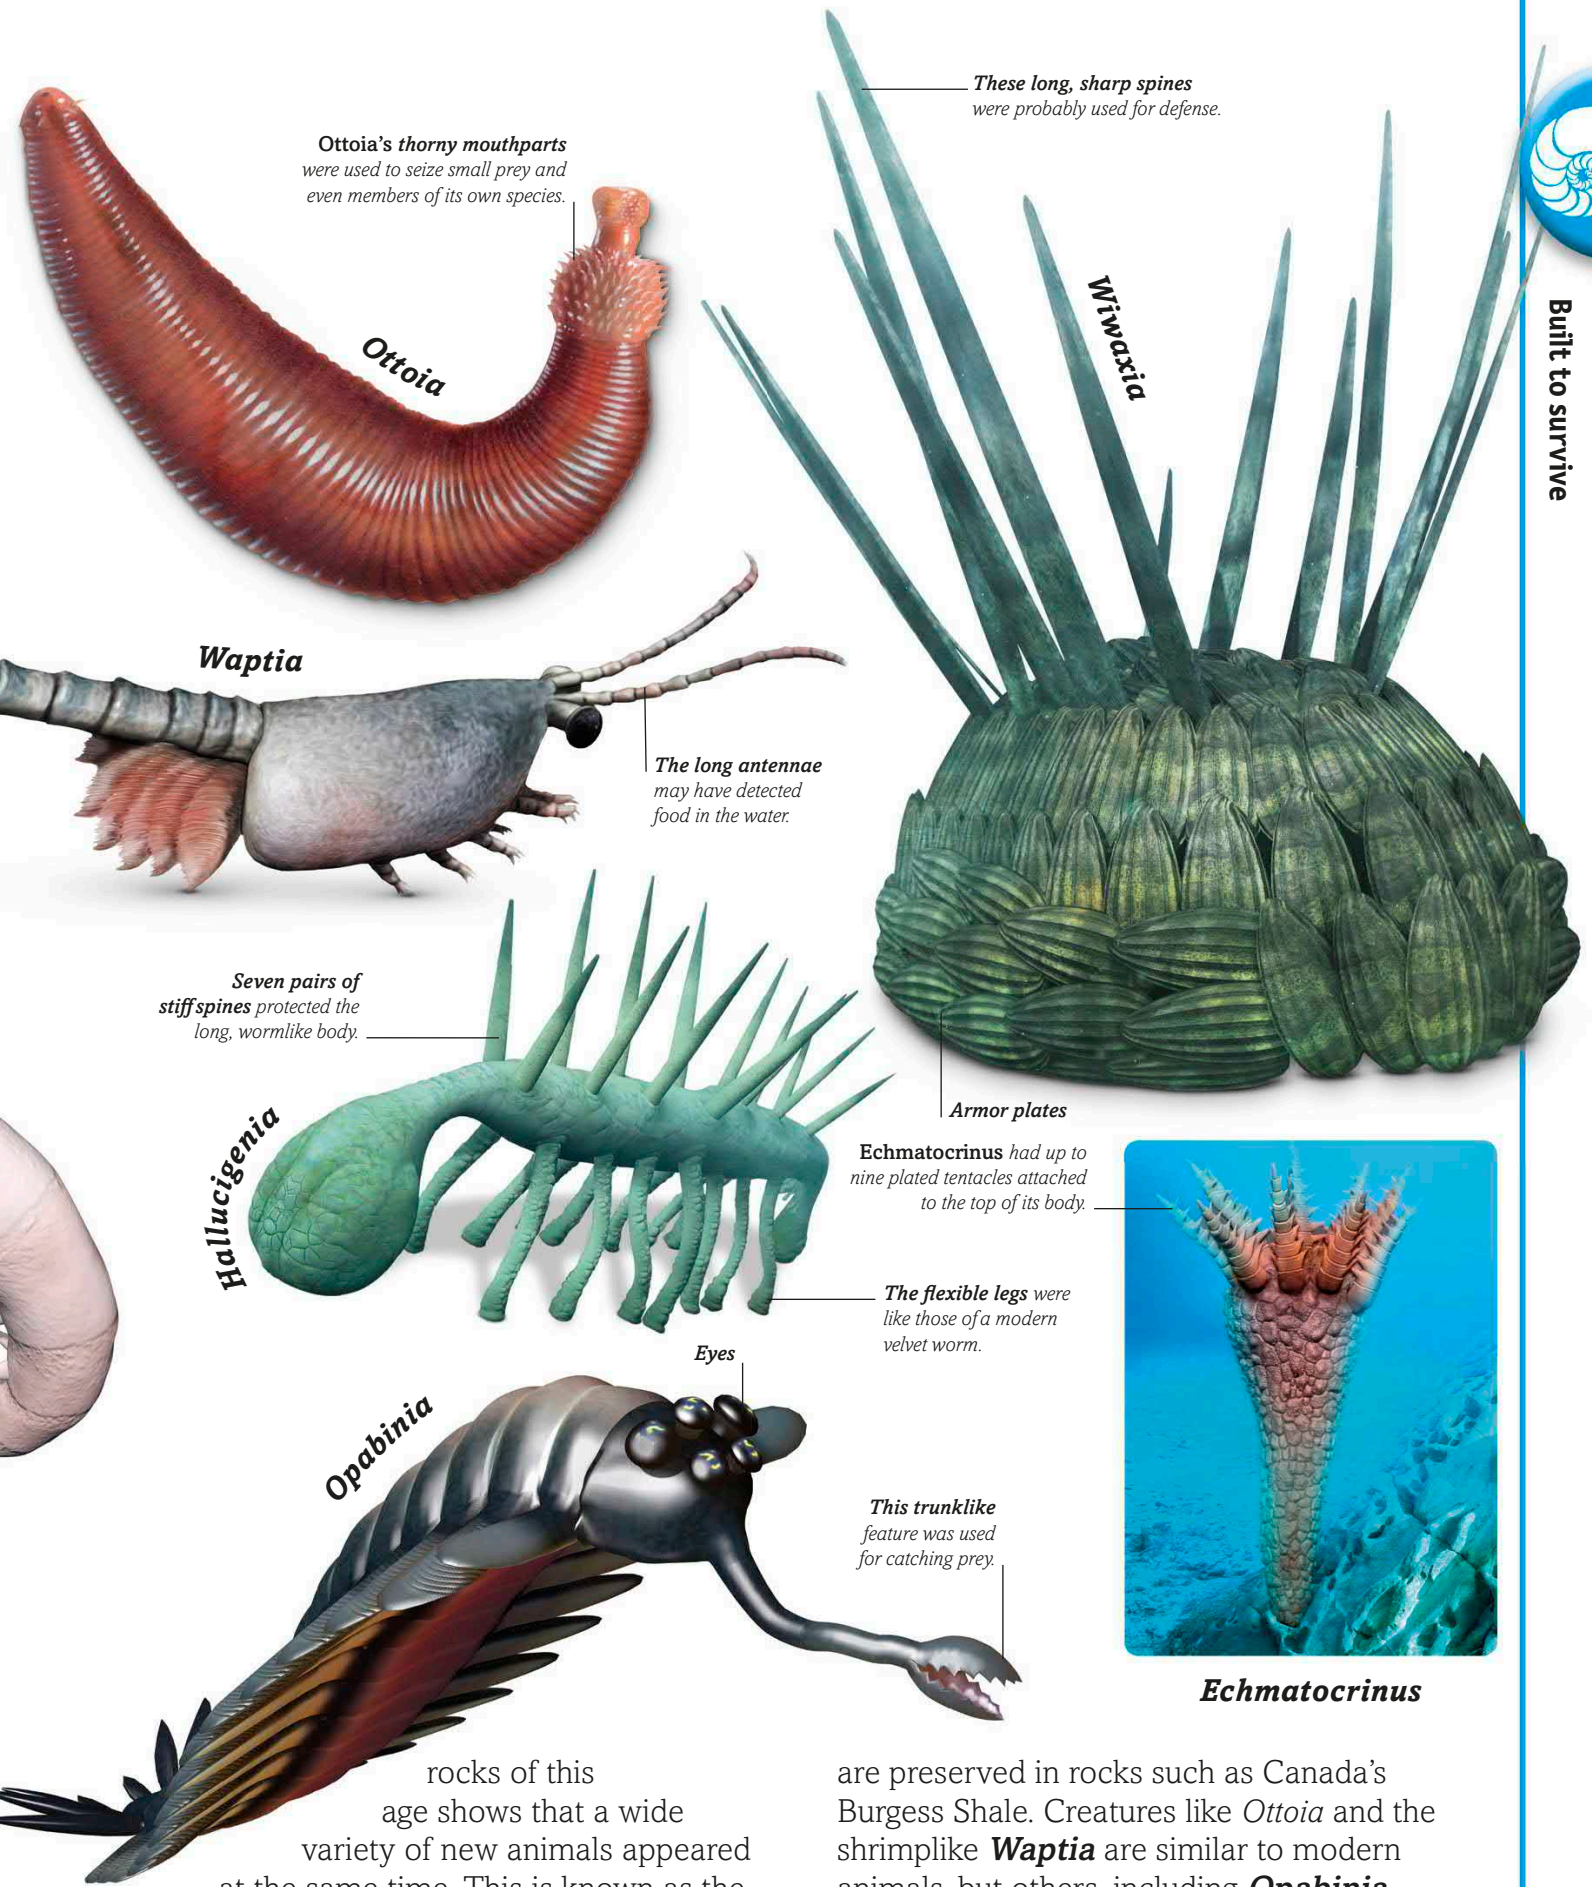

Echmatocrinus

rocks of this age shows that a wide variety of new animals appeared at the same time. This is known as the Cambrian explosion. Soft-bodied animals like the burrowing worm ***Ottoia*** thrived too, and are preserved in rocks such as Canada's Burgess Shale. Creatures like *Ottoia* and the shrimplike ***Waptia*** are similar to modern animals, but others, including ***Opabinia***, were so odd that we are still not sure how they functioned.

SET IN STONE

High in the Rocky Mountains of British Columbia, Canada, lies one of the most incredible fossil sites—the Burgess Shale. It was discovered in 1909 by American fossil hunter and scientist Charles Walcott, who realized he had stumbled upon a treasure trove of ancient life. He was to spend much of the next 14 years working on the site, splitting the rock to reveal over 65,000 fossils.

More than 500 million years ago, the Burgess Shale was a muddy seabed at the foot of a coastal cliff. The water teemed with animals, some of which were buried by mudslides. As the mud turned to rock, their remains were preserved as flattened fossils, recording the variety of life that had evolved by the start of the Paleozoic Era, about 444 million years ago. Some of the fossils were of animals that had exoskeletons, such as these trilobites, but many more were of soft-bodied animals that were very different from the creatures we see today, such as the five-eyed *Opabinia*. These animals provide scientists with a spectacular snapshot of life millions of years ago.

Trilobites

Paradoxides *was one of the earliest and biggest trilobites, growing to 15 in (37 cm) long.*

Paradoxides

Phacops *had a pair of compound eyes, each made up of many small lenses.*

Curled Phacops

The armored body curled up *into a ball to protect its soft underside from attack.*

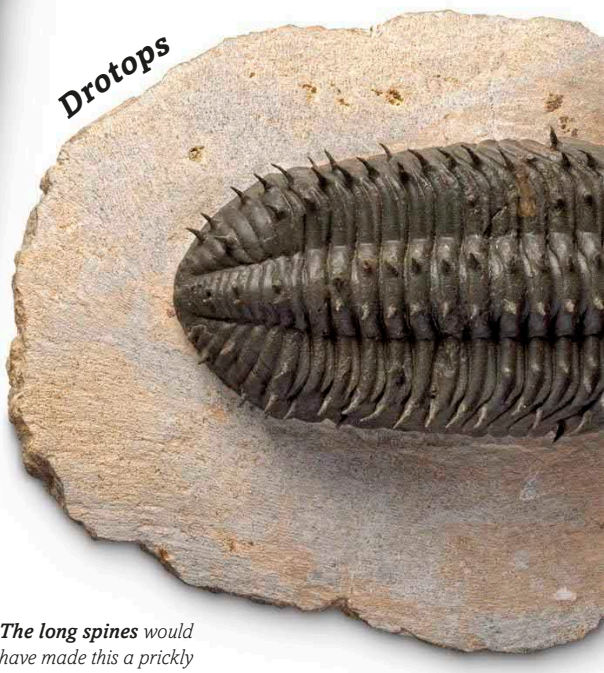

Drotops

The long spines *would have made this a prickly mouthful for a predator.*

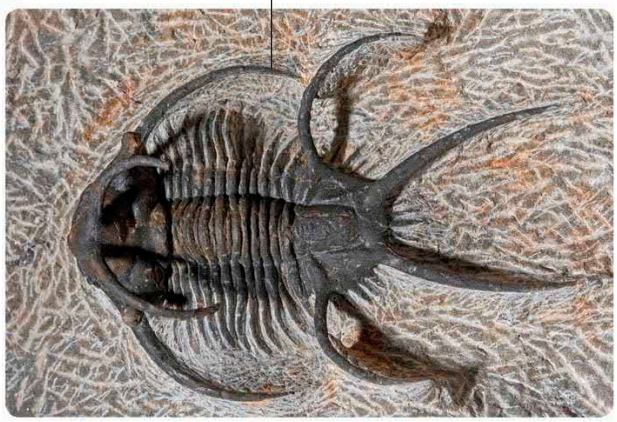

Ceratalges

Trilobites, with their segmented bodies, are among the most distinctive fossils found in ancient rocks. The earliest trilobites appear in rocks that are more than 520 million years old. They thrived in the oceans for an amazing 270 million years until the catastrophic mass extinction that ended the Paleozoic Era 252 million years ago. Trilobites were some of the earliest arthropods—animals with external skeletons and jointed legs, like today's insects and spiders. Many trilobites like ***Drotops*** looked like flattened pillbugs, with several pairs of legs

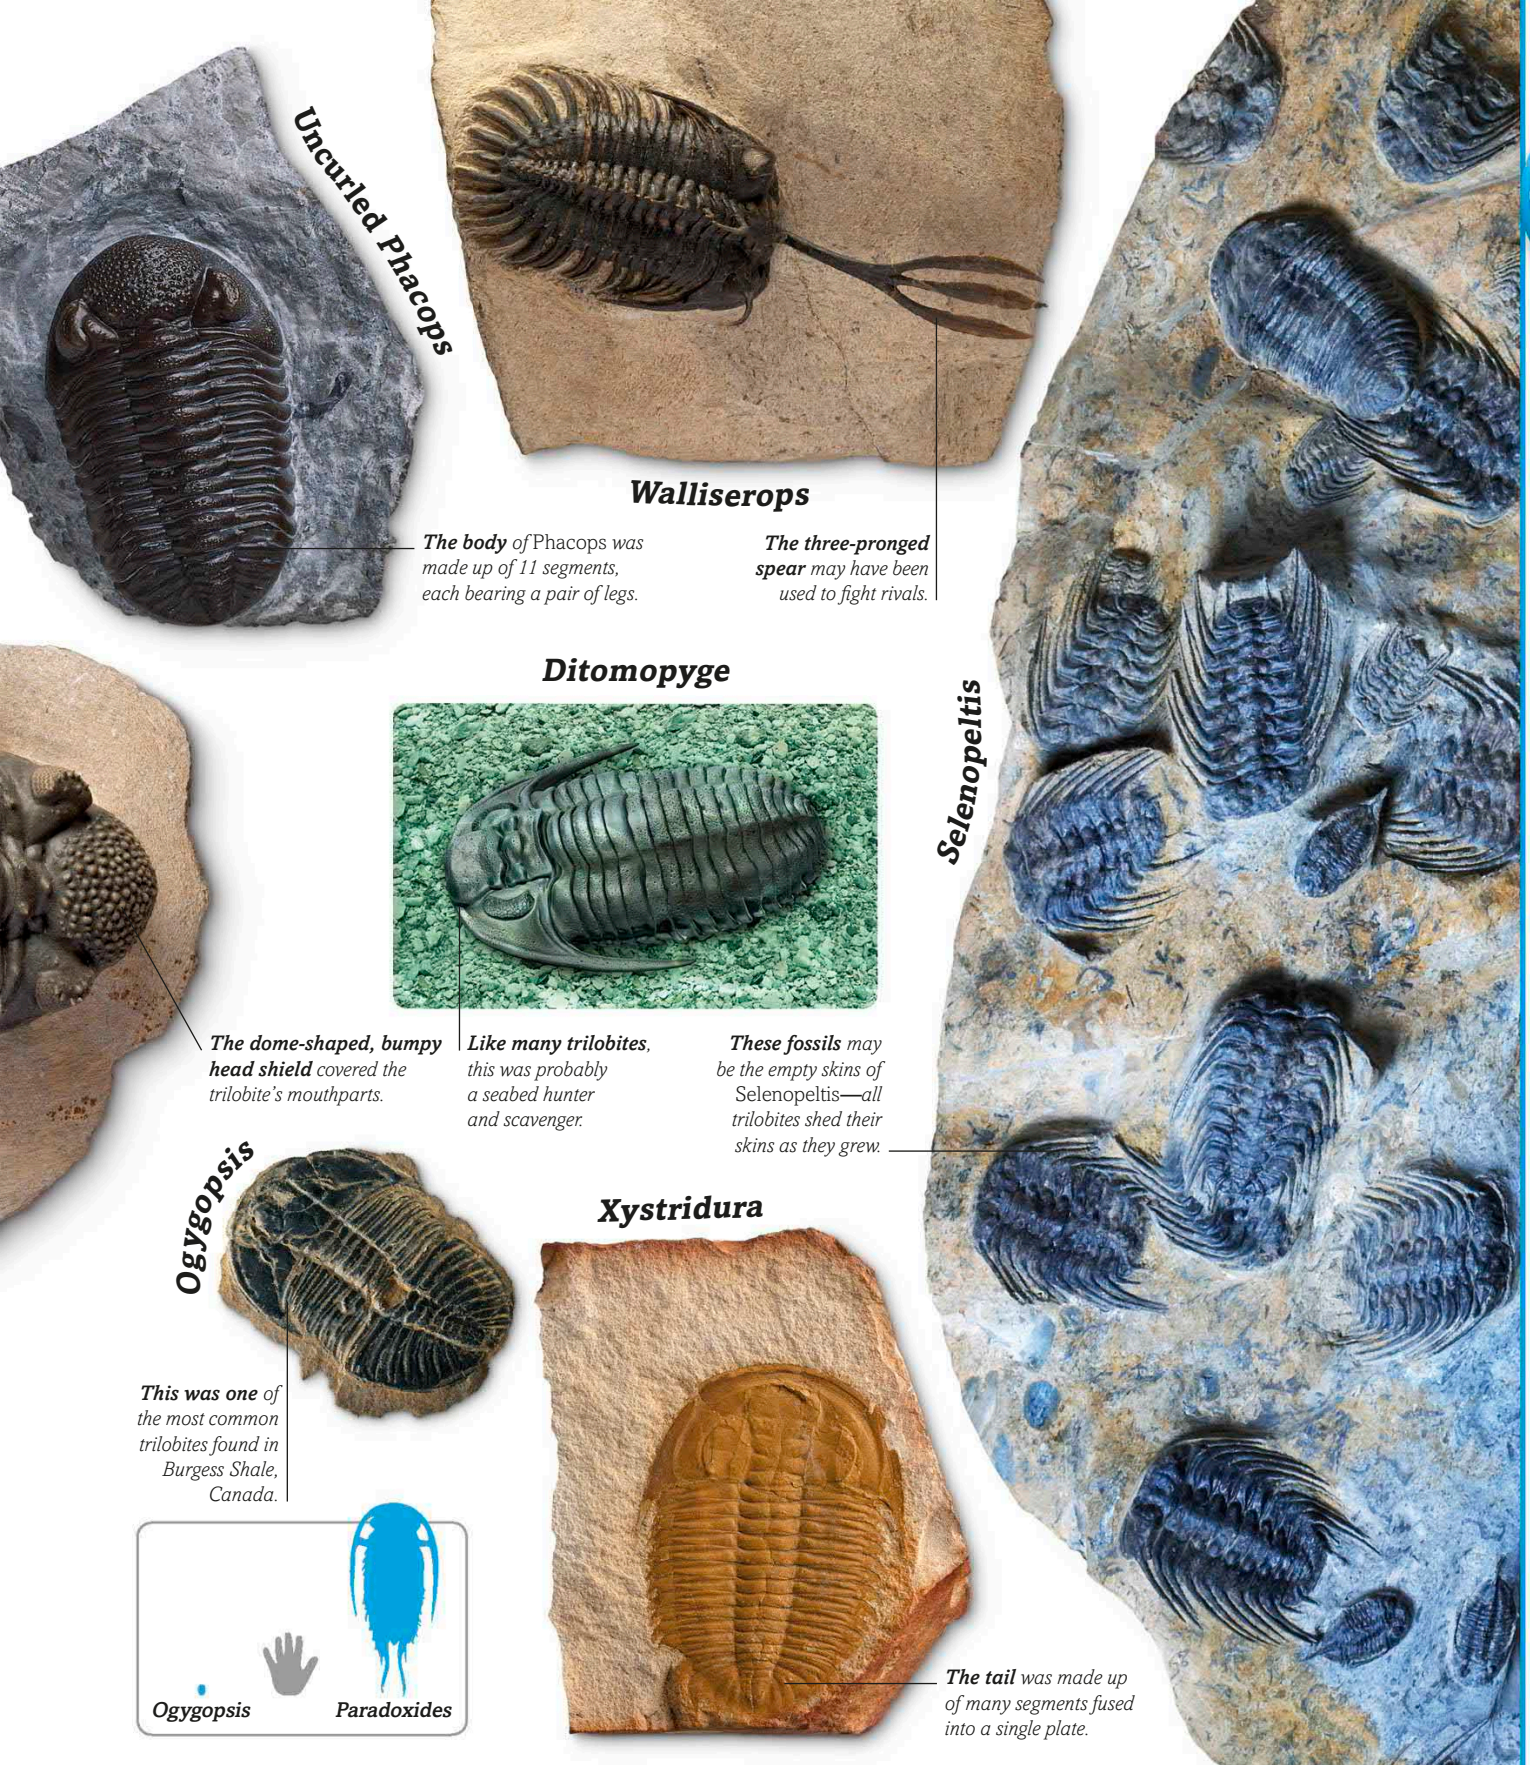

and large eyes; trilobites were among the first animals to evolve compound eyes packed full of lenses, just like those of today's insects. Some, including ***Ceratalges*** and ***Walliserops***, had spectacular spines that may have been for courtship or defense. Many would have foraged for food on the seabed, but others could swim. There were at least 17,000 known species, ranging from tiny creatures less than ⅛ in (3 mm) long to animals that were as big as this book.

The age of fish

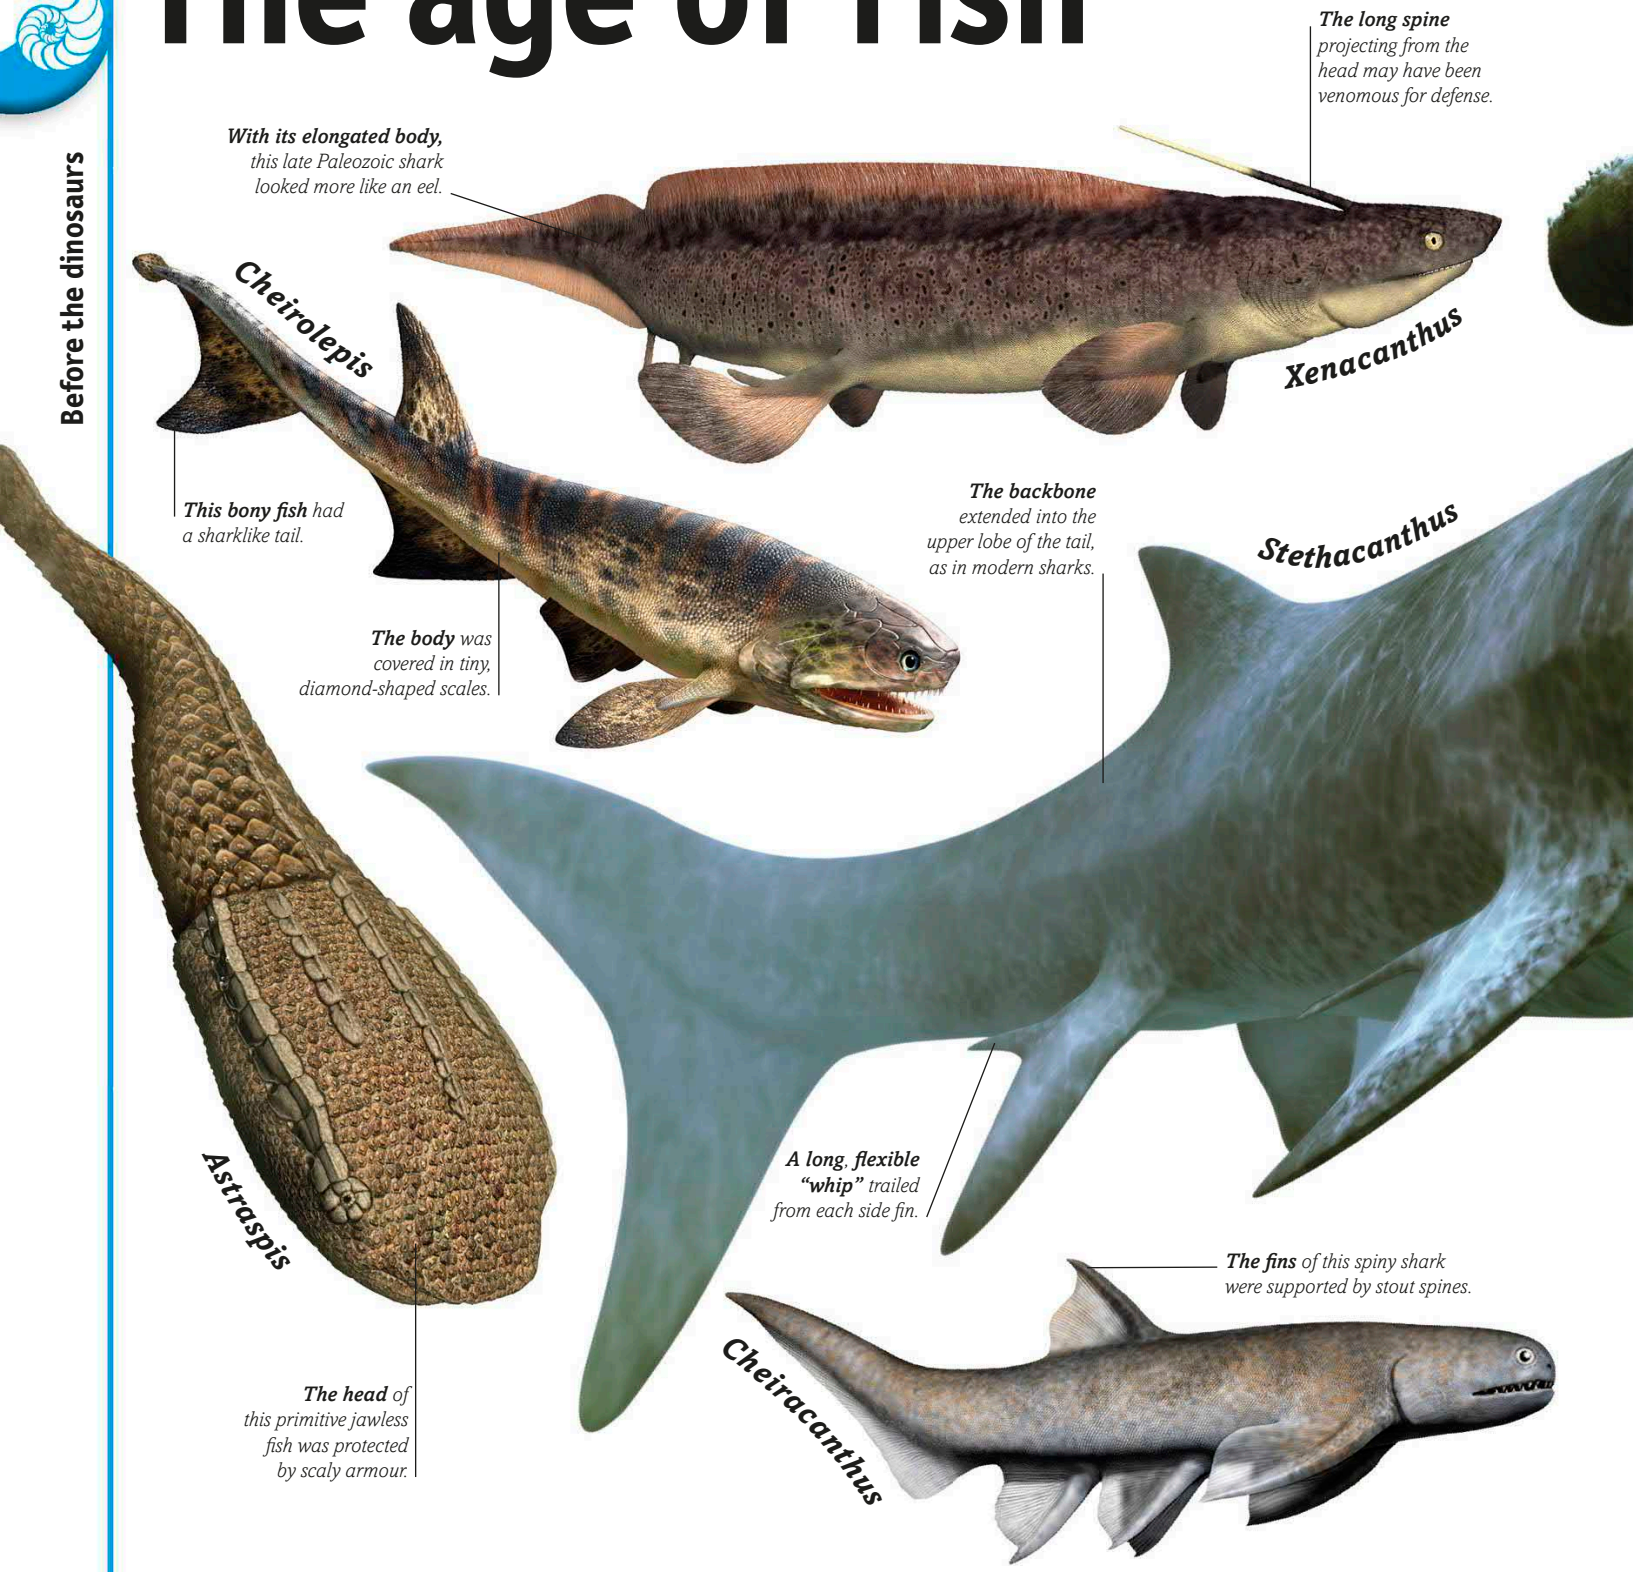

All land vertebrates, including dinosaurs, are descended from fish—the first animals to have backbones. Fish evolved from soft-bodied creatures like ***Pikaia***, which lived over 500 million years ago. Early forms like ***Astraspis*** had a soft, jawless mouth and a flexible rod called a notochord in place of a bony spine. Over the next 100 million years, fish developed hinged jaws and backbones. During the Devonian Period, 416–358 million years ago, they became so successful that this period is known as the age of fish. Two main groups

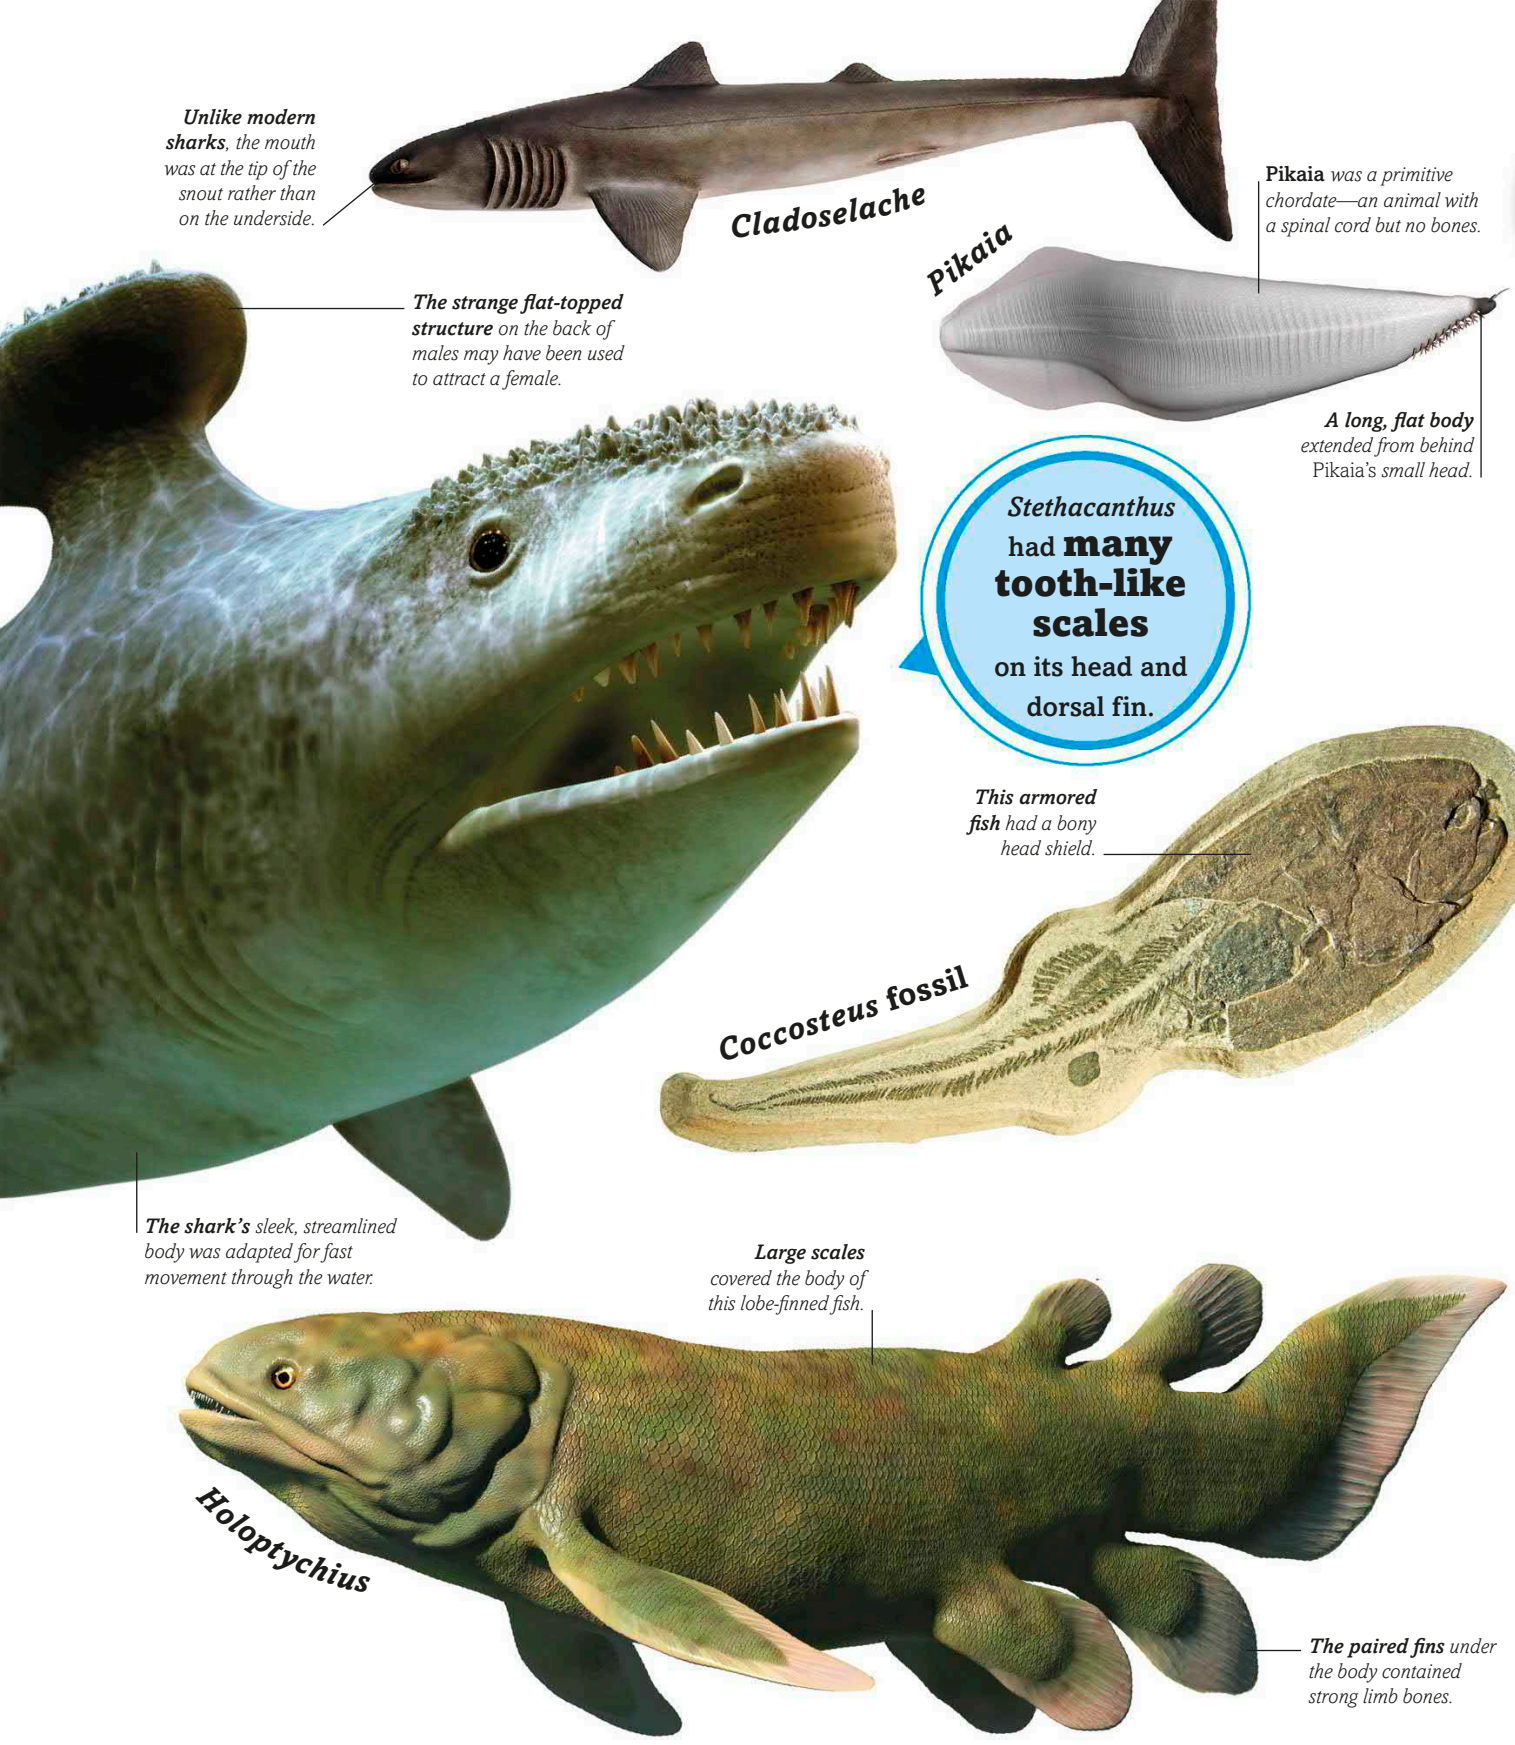

evolved—sharks like ***Stethacanthus*** and ***Cladoselache*** had skeletons made of a rubbery material called cartilage, while the so-called bony fish like ***Cheirolepis*** had skeletons of hardened bone. Some of these fish also had four stout, bony fins beneath their bodies. Called the lobe-finned fish, they were the first vertebrates to crawl out of the water and live on land. Fish have continued to flourish ever since; even though the largest mass extinction wiped out 90 percent of marine species 251 million years ago, fish managed to survive.

Fish armor

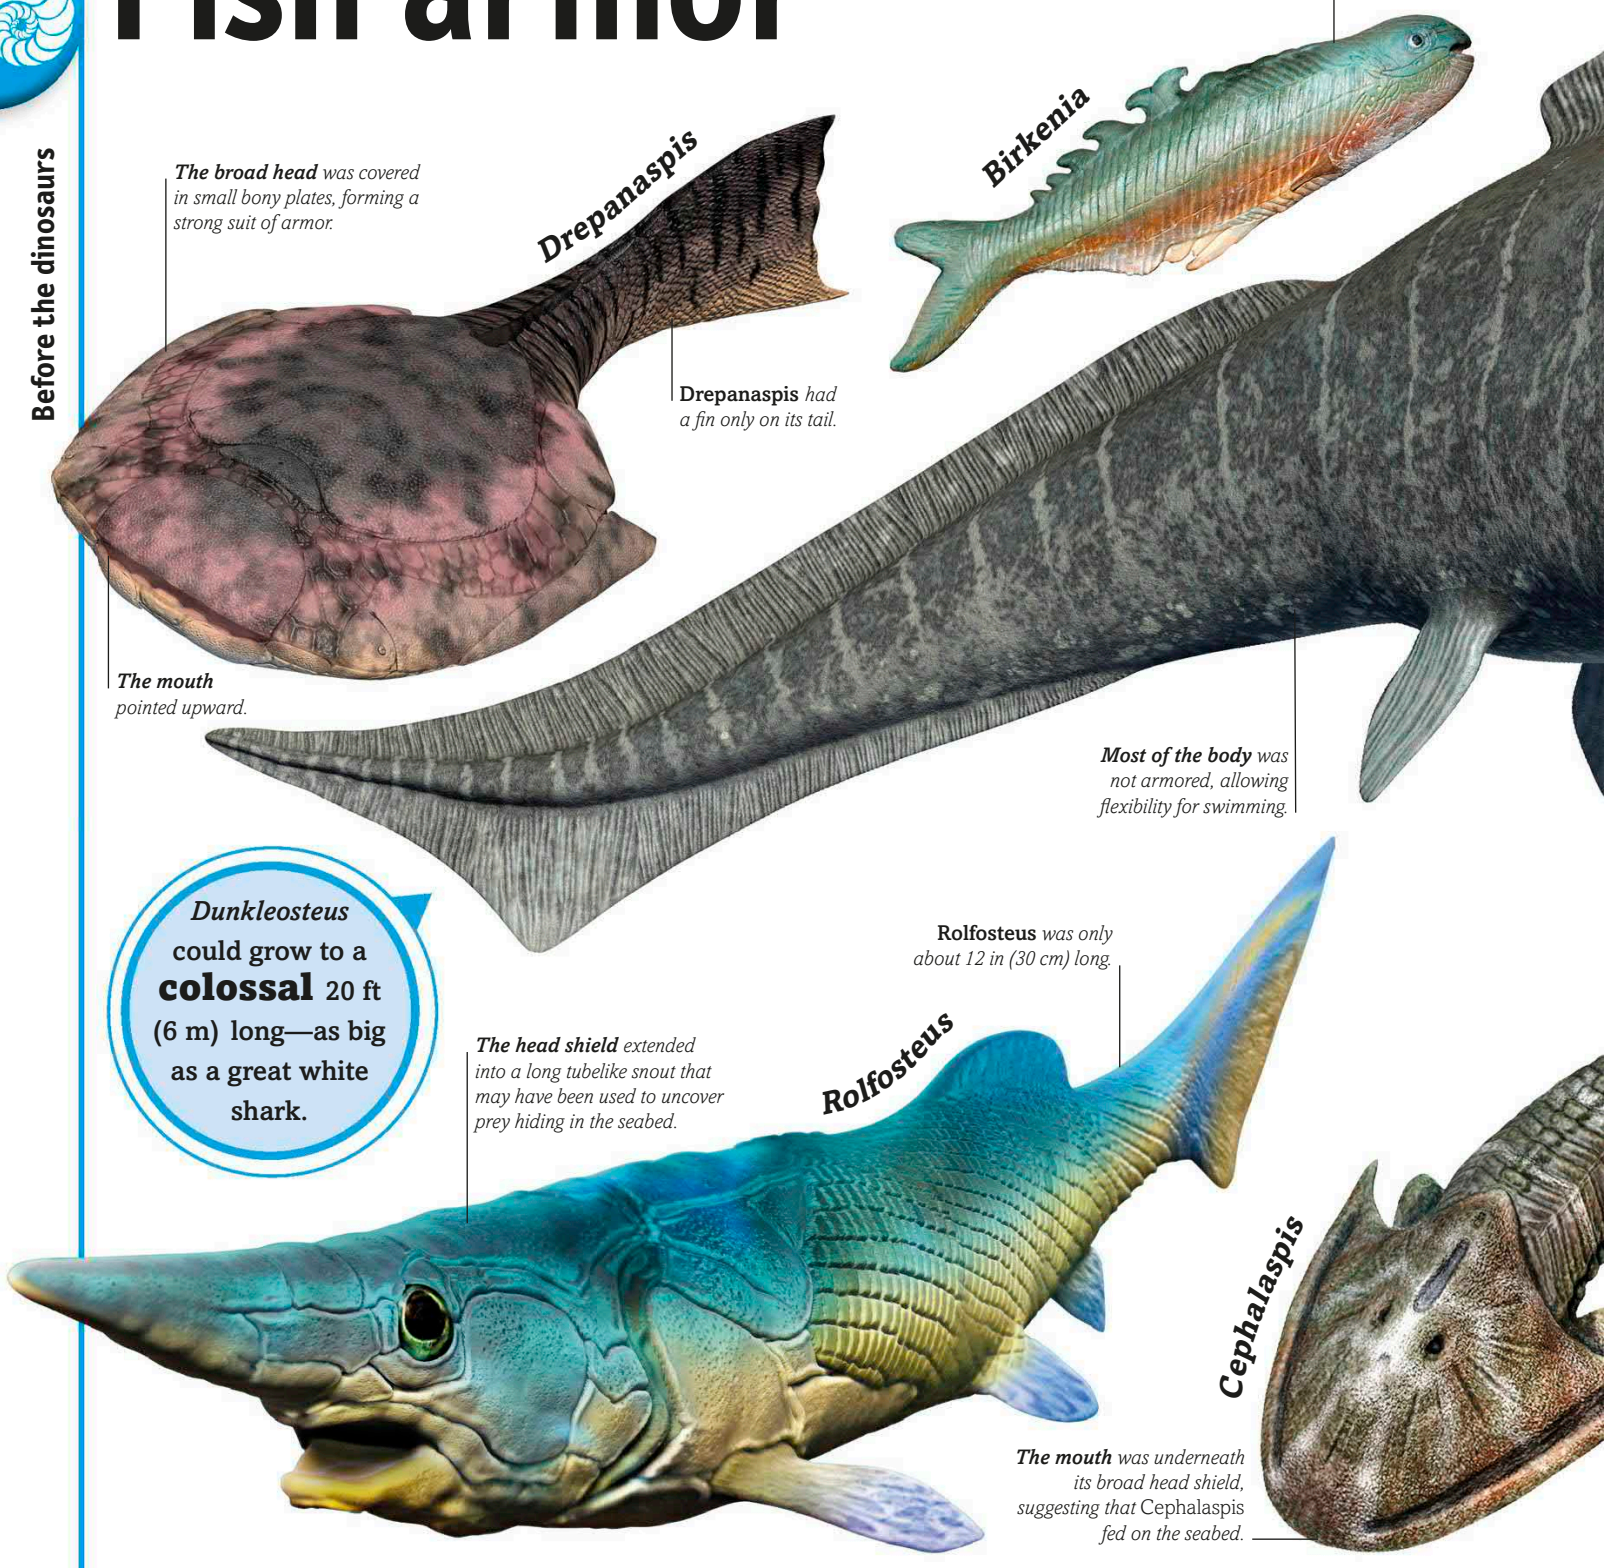

Many early fish had tough armor protecting their heads, and sometimes their bodies too. The first of these armored fish appeared more than 400 million years ago. The jawless ***Cephalaspis*** and ***Drepanaspis*** had big horseshoe-shaped head shields. They were much smaller than the armored, jawed fish that evolved later—the placoderms. Some of these massive jawed fish were monstrous looking. Their heads and upper bodies were covered with tough, overlapping plates of bone that were hinged to allow movement. The armor

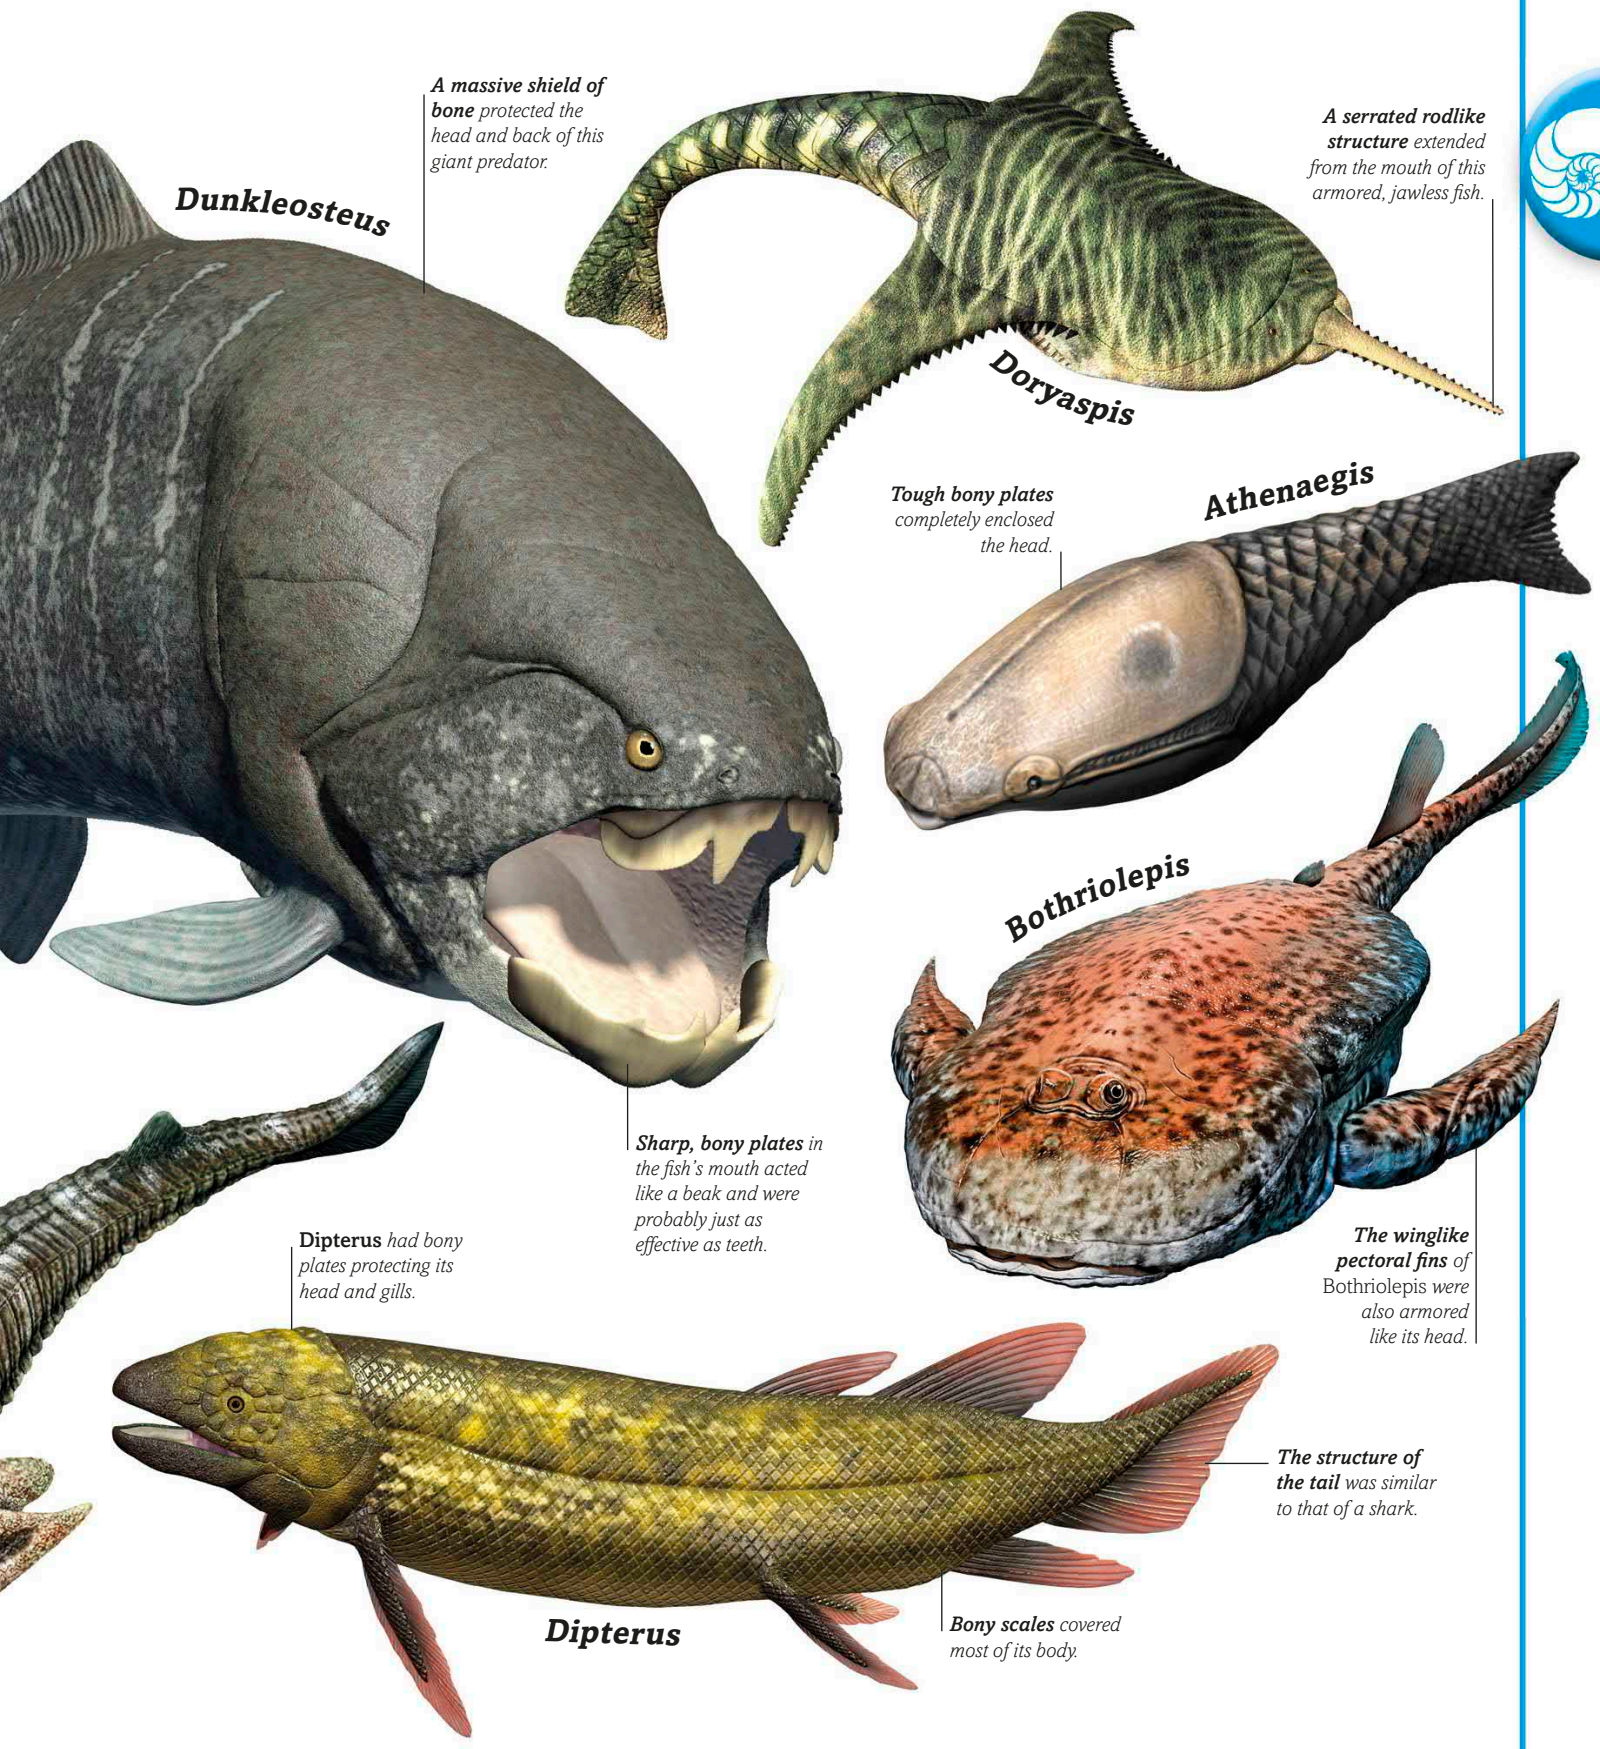

may have provided defense against predators. The only animals that might threaten them were sharks and other big, fish-eating predators, since the fearsome marine reptiles with their powerful jaws did not appear in the oceans for another 100 million years. Some of the placoderms, like the great white shark–sized ***Dunkleosteus***, would have had few enemies—it had one of the most powerful bites of any fish and bony plates that were about 2 in (5 cm) thick. It is also likely that they were armored as defense against each other.

Early life on land

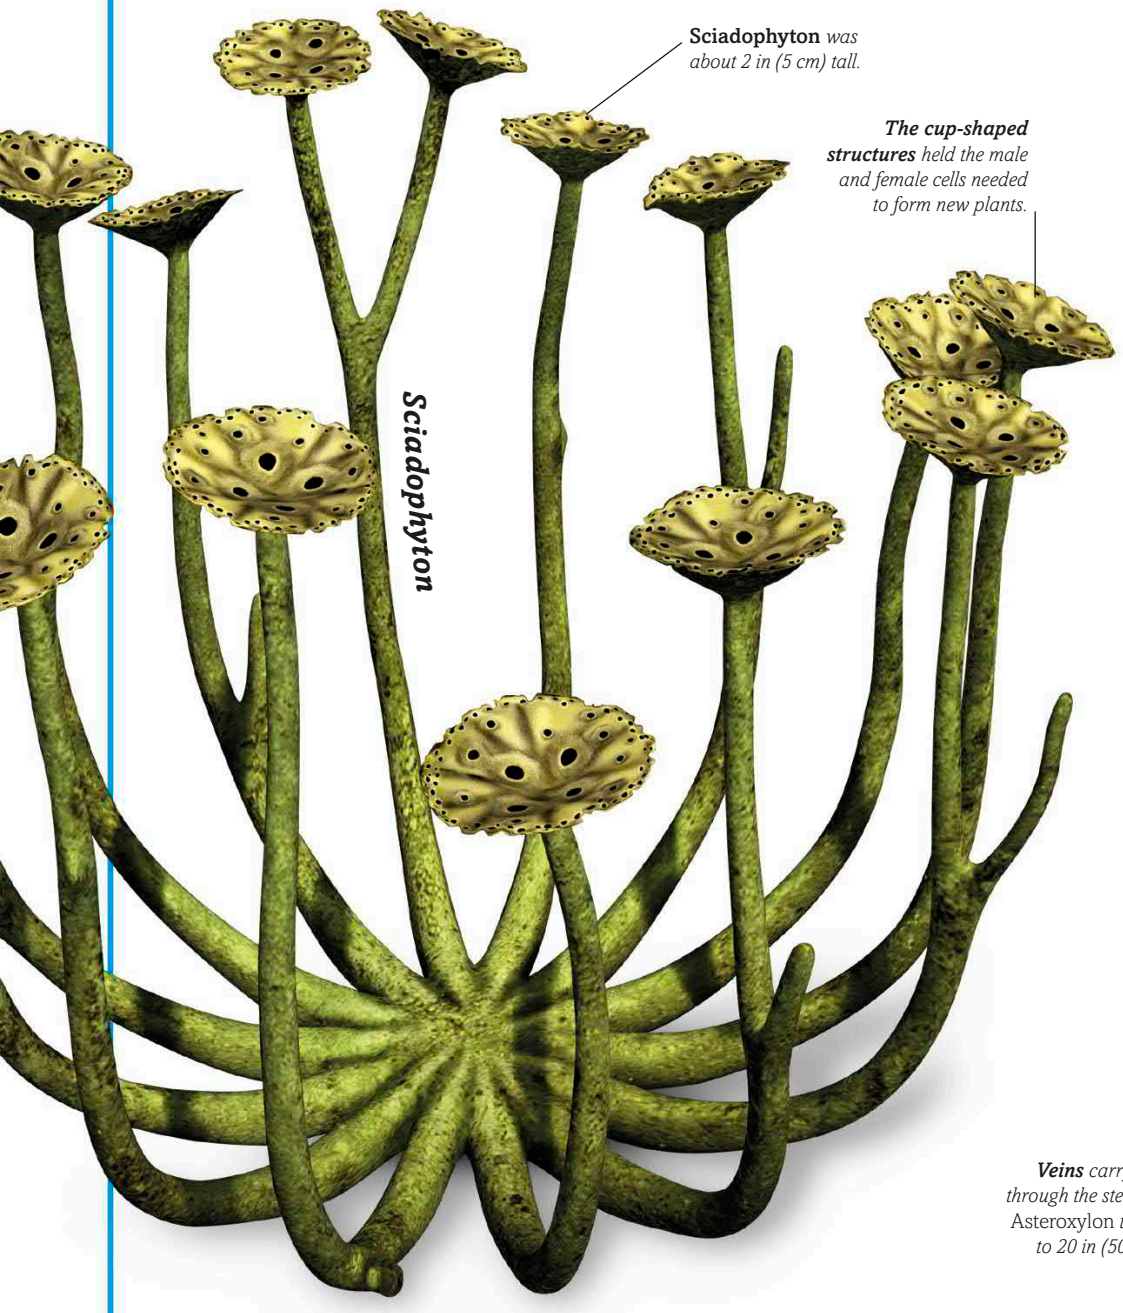

Sciadophyton *was about 2 in (5 cm) tall.*

The cup-shaped structures *held the male and female cells needed to form new plants.*

This fossil preserves a leaf frond *of one of the first woody trees, which lived about 370 million years ago.*

The small, scalelike leaves *soaked up sunlight and used it to turn air and water into sugar.*

Veins *carrying water through the stem allowed* Asteroxylon *to grow up to 20 in (50 cm) high.*

Until about 500 million years ago, there was no life on land. The continents were barren rock and sand like the surface of Mars. The first land organisms were probably microscopic bacteria that built up in mats. These were followed by fungi that lived off the bacterial mats and broke them down to form soil, allowing early plants to get a root-hold. Spores of these plants have been found in fossils that formed about 476 million years ago. The plants would have looked like ***Aglaophyton*** and ***Sciadophyton***—simple, mosslike plants that grew close to the

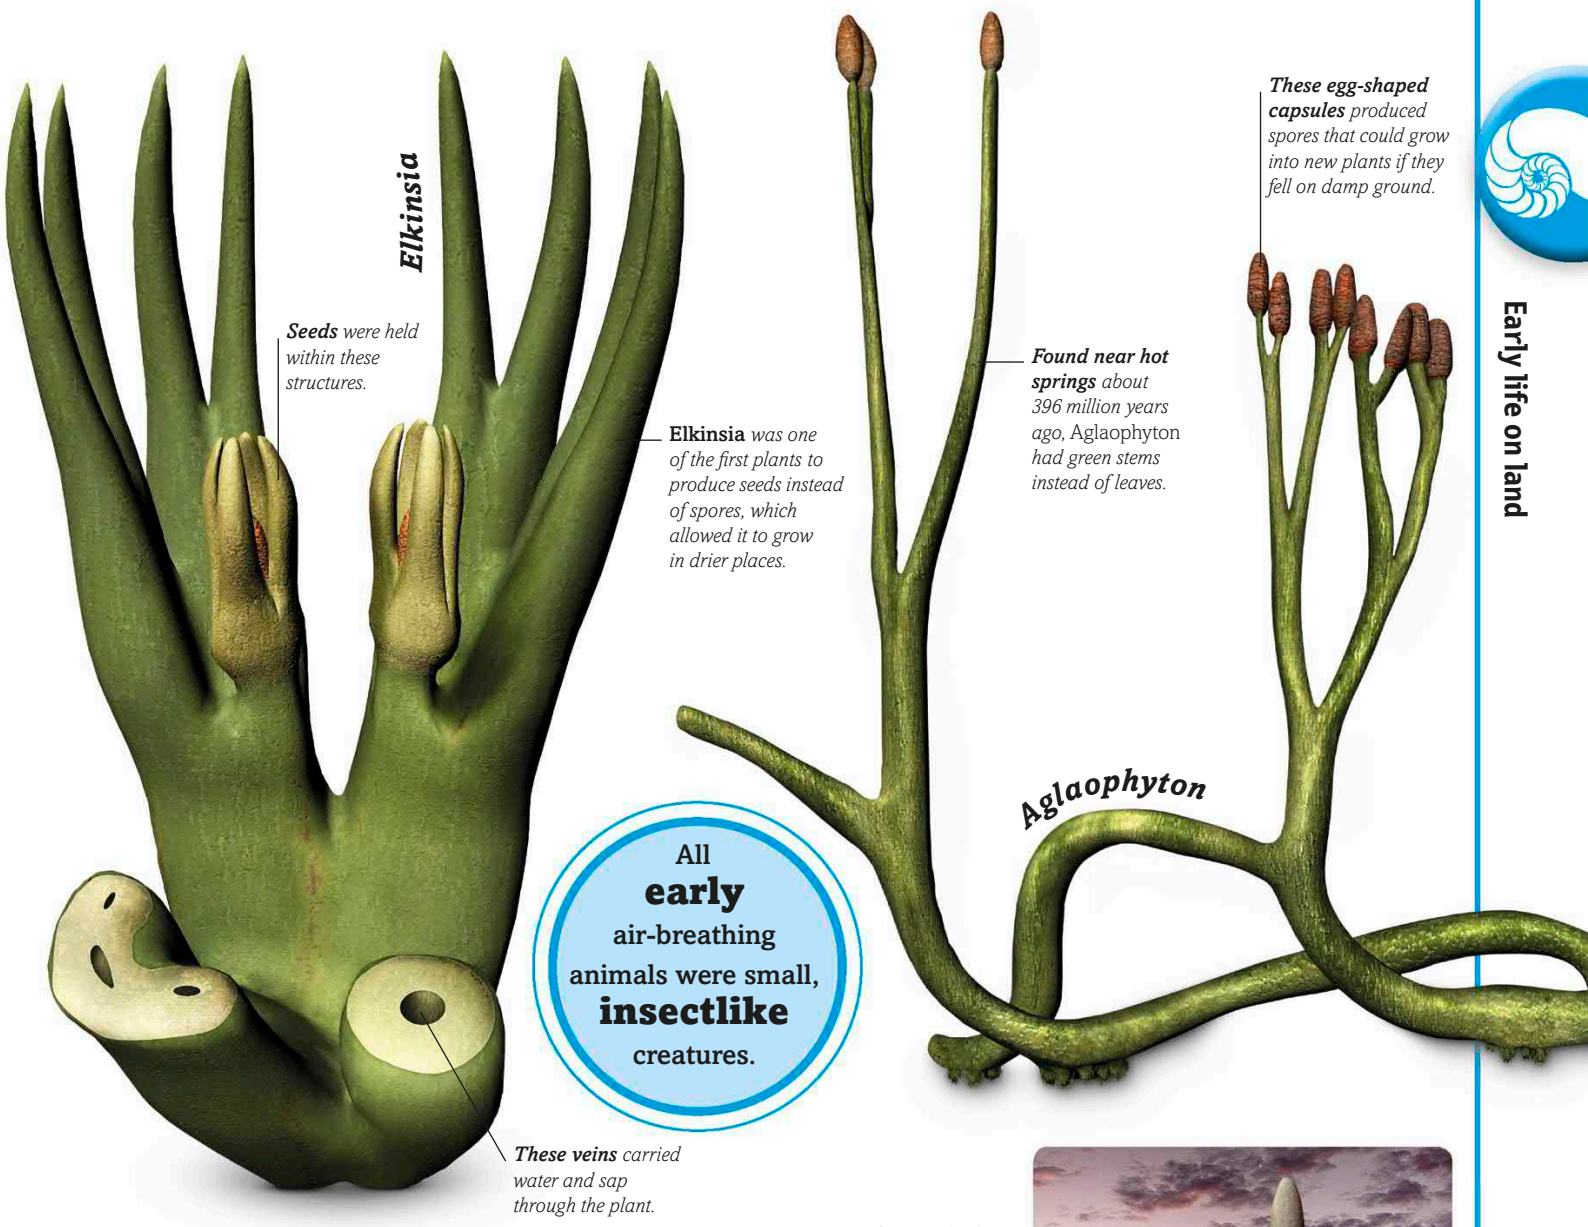

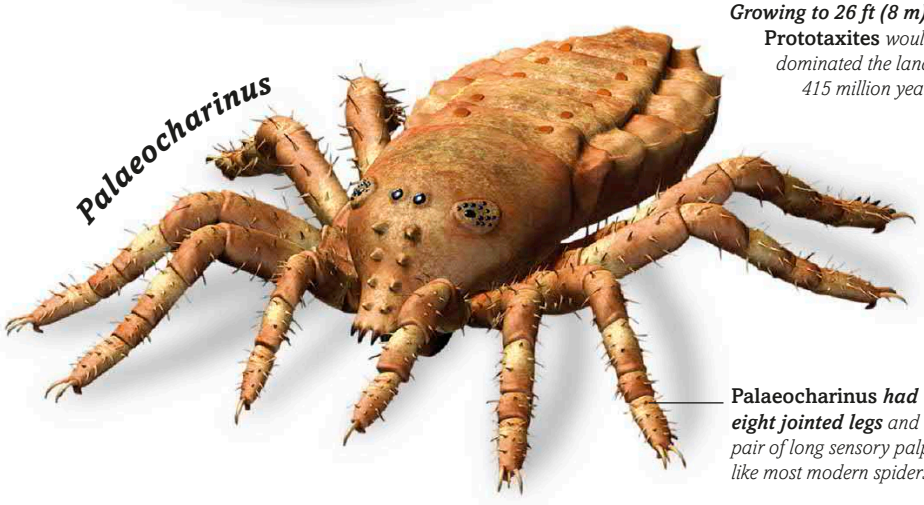

Growing to 26 ft (8 m) high, Prototaxites would have dominated the landscape 415 million years ago.

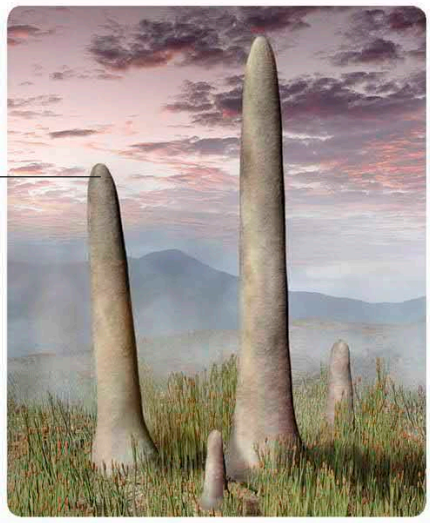

Prototaxites

ground in damp places. Over time, plants evolved veins that allowed water and sap to flow through stems connecting their roots and leaves. This allowed them to grow taller, eventually leading to trees like the 20-ft- (6-m-) high ***Archaeopteris***—the first tree to have dense wood and true leaves and to form large forests. Meanwhile, the fungi, bacteria, and plants provided food for early land animals like the millipede *Pneumodesmus*. These small animals were in turn hunted by predators, including the spiderlike ***Palaeocharinus***.

Towering trees

This fossilized leaflet *had a heart-shaped base.*

Macroneuropteris

This early conifer *had a tall, straight trunk and short, needle-shaped leaves.*

Walchia

Lepidodendron

The bark *of this giant clubmoss had a distinctive diamond pattern.*

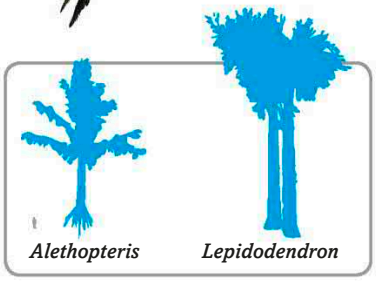

Despite its fernlike leaves, Alethopteris *produced seeds instead of spores.*

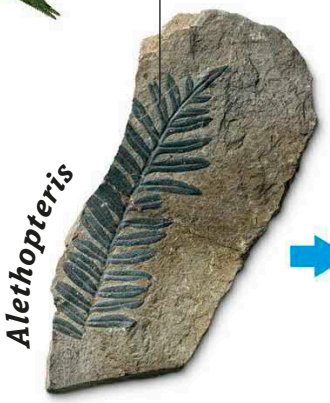

Alethopteris

Although known as the age of fish, the Devonian Period also saw the transformation of land habitats by plant life. The first woody trees appeared in the late Devonian, about 385 million years ago, and spread to form the earliest forests. During the next 85 million years, throughout the Carboniferous Period, trees and other plants colonized the land and created habitats for animal life. Many of these plants grew in swamps, and when they died, their remains formed peat that ultimately turned to coal. Some trees, such

as ***Sigillaria*** and ***Lepidodendron***, looked similar to modern trees but were clubmosses—relatives of mosses and ferns. These could grow to great heights—*Lepidodendron* towered 130 ft (40 m) or more. Many plants resembled modern spore-bearing ferns and horsetails, but others, including ***Alethopteris*** and ***Paripteris***, bore true seeds. By the late Carboniferous, plants like ***Walchia*** had evolved—the first of the pinelike conifer trees that later became an important food source for dinosaurs.

Arthropod empire

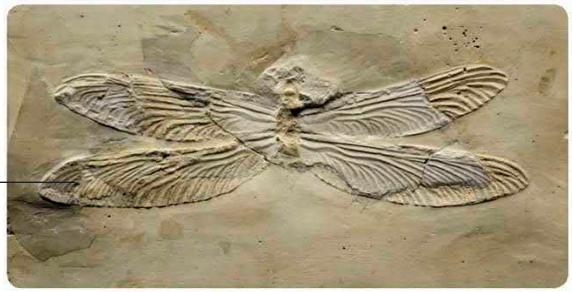

***Tupus* fossil**

Rock *formed from fine-grained mud has preserved the wings of this early dragonfly.*

The complex compound eyes *with many lenses were just like those of modern adult insects.*

Each wing *was a thin plate of plasticlike chitin, stiffened by struts called veins.*

The first flying *insects* took to the air at least 250 million years before the first birds.

Meganeura

Meganeura *may have had a colorful tail.*

***Cyclophthalmus* fossil**

The jointed legs *of an extinct type of scorpion are clearly visible in this fossil found in central Europe.*

Forests of towering trees and other plants spread over the land from about 358–299 million years ago, providing food for many small plant-eating animals. They included soft-bodied animals like worms, whose burrows have been found fossilized. But most of the fossilized land animals of this period were arthropods—creatures with tough external skeletons and jointed legs, like today's insects, spiders and crustaceans. They included early millipedes like ***Euphoberia***, and plant-eating insects like ***Archimylacris***—a type of

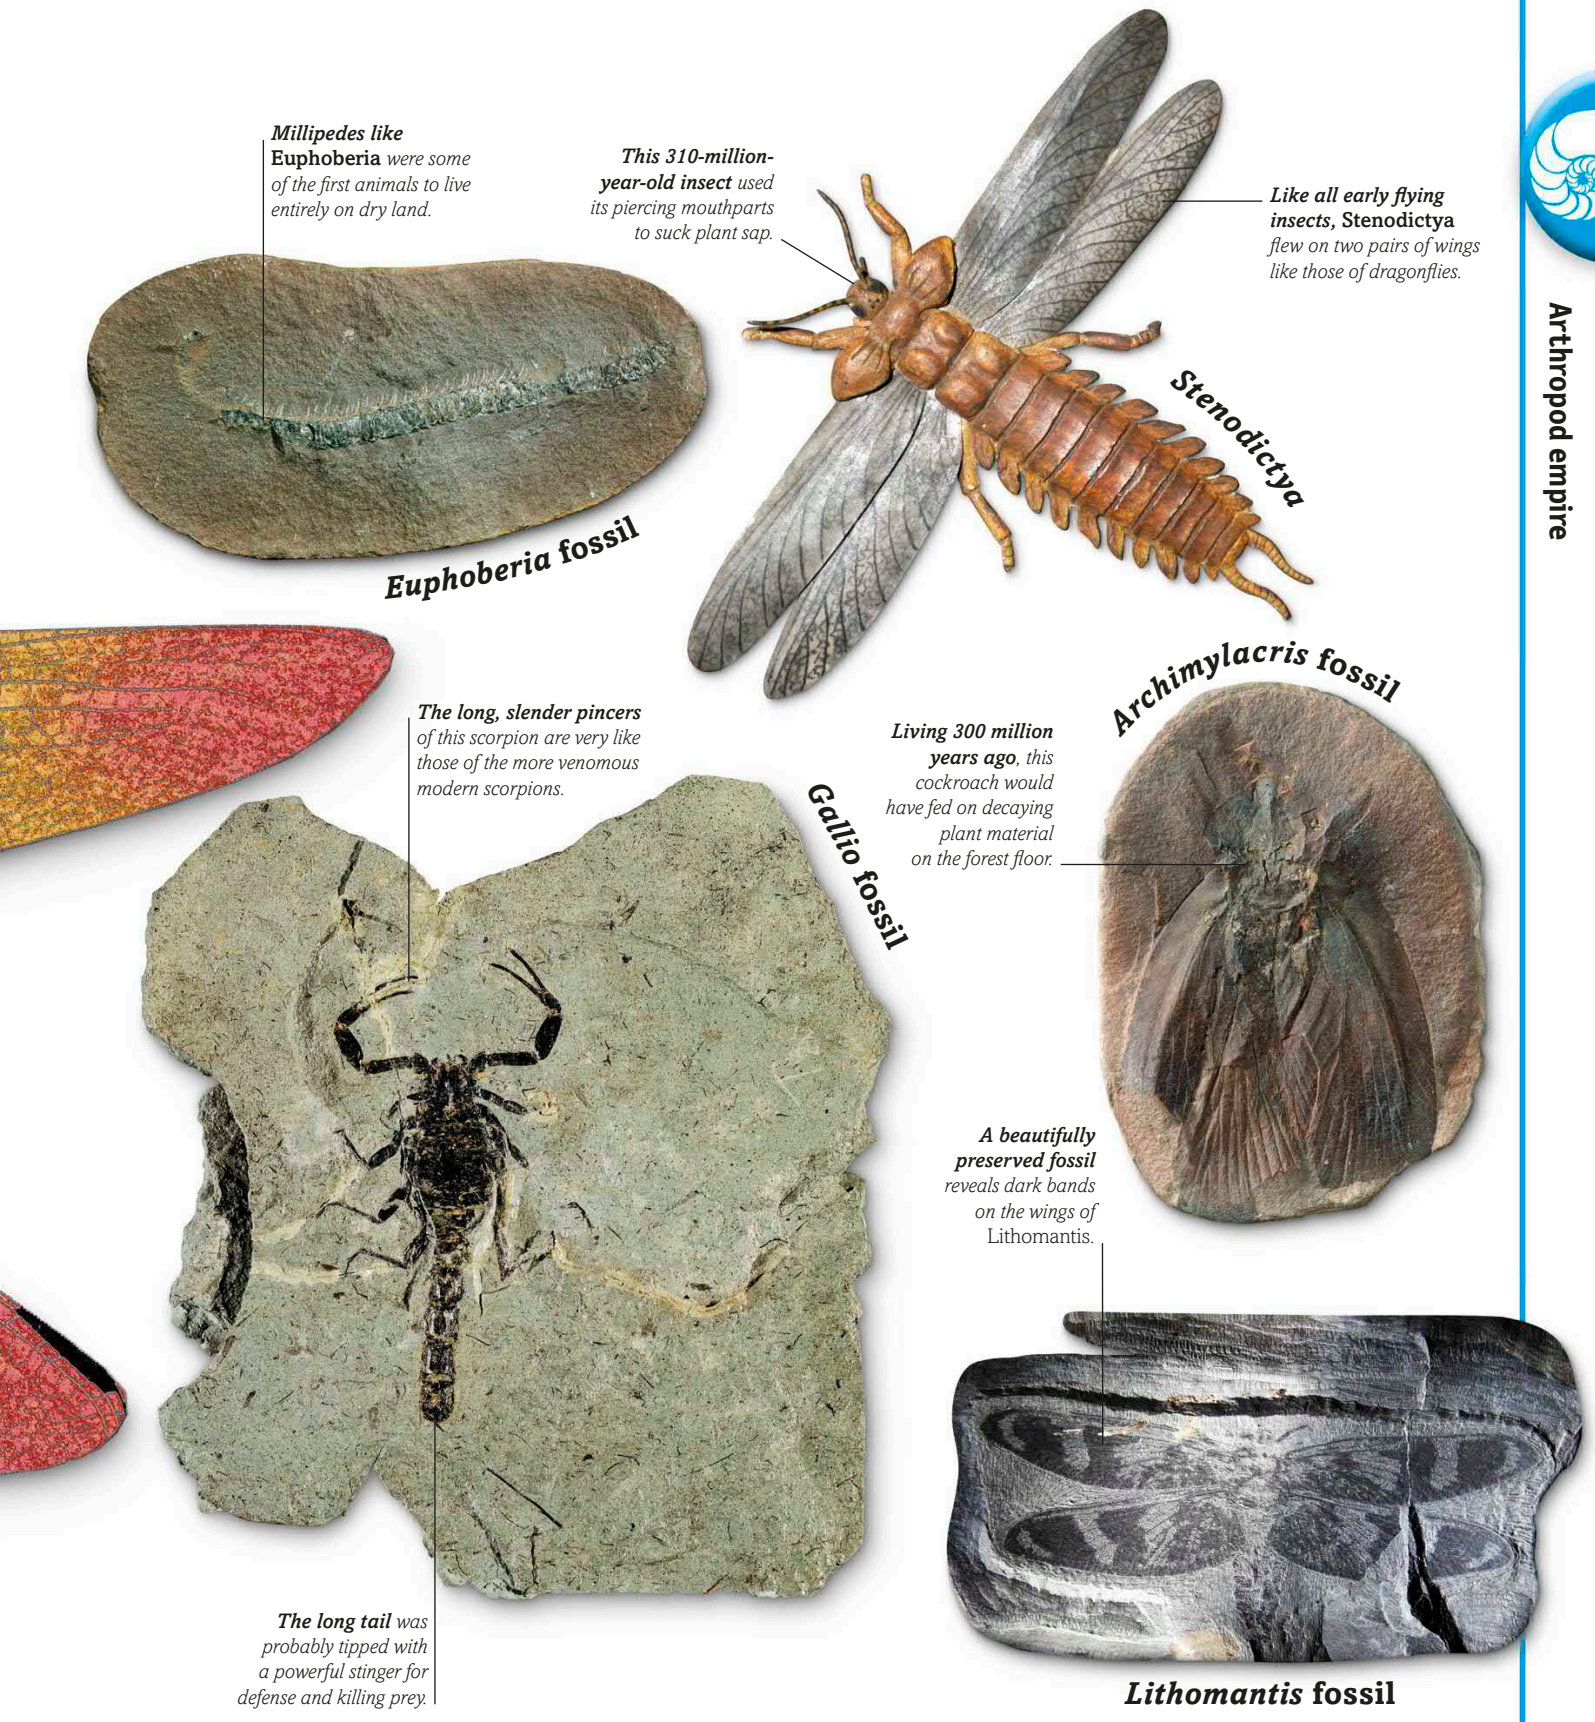

cockroach. They were hunted by predatory centipedes, early spiders, scorpions like ***Cyclophthalmus***, and insects like ***Meganeura***. The forests would have been buzzing with these animals, especially insects that, in an era before birds, were the only animals able to fly. Many would have spent most of their lives as wingless nymphs or grubs that lived underwater or in the ground, before emerging as winged adults. Like modern mayflies, these may have had very short adult lives, but they have survived for millions of years as fossils.

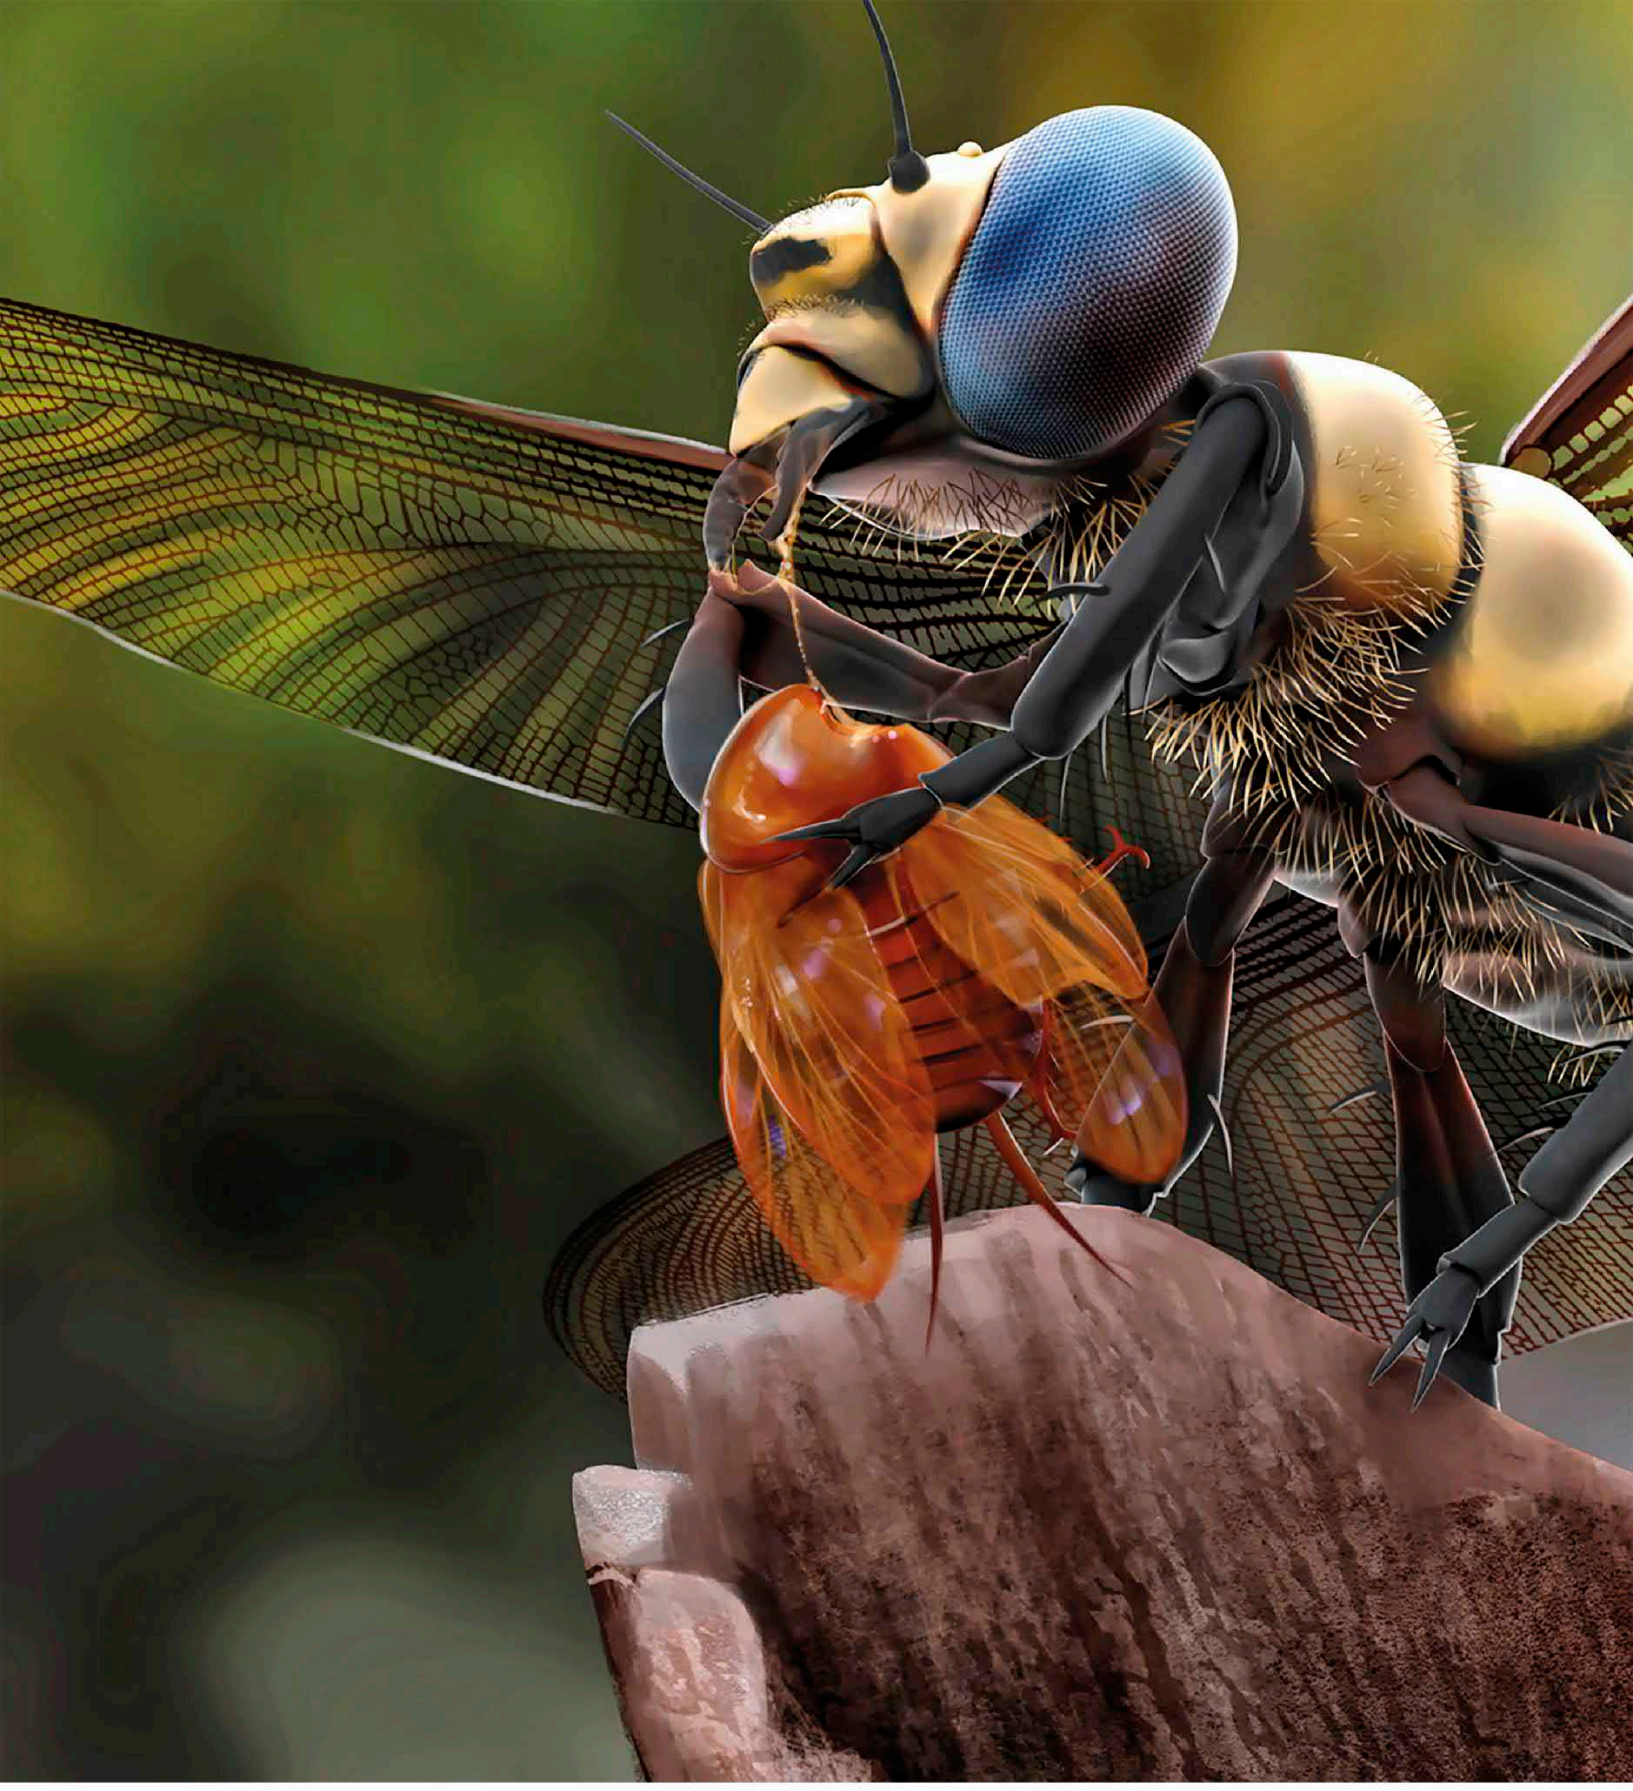

AIRBORNE GIANT

Some of the most spectacular insects that ever lived flew through the lush forests of the Carboniferous Period, about 300 million years ago. They were griffinflies—extinct relatives of modern dragonflies, but far bigger. Fossils of the largest known dragonfly relative, *Meganeura*, show that its wingspan reached more than 27 in (69 cm), almost four times the size of the biggest living dragonflies.

Like its modern counterparts, *Meganeura* was a hunter that preyed on other insects. It probably used the same predatory technique, targeting airborne prey and seizing them with its bristly legs. Flying back to a perch, *Meganeura* would then use its powerful biting jaws to chew through its prey's tough armor to reach the soft flesh within. *Meganeura* would have laid its eggs in water, and after these hatched, the young would live underwater for several years before emerging to change into adult flying insects. The puzzle about *Meganeura* is how it could grow so much bigger than any living dragonfly. One theory is that higher oxygen levels in the atmosphere allowed insects to grow larger than they do now.

Early amphibians

All modern land **vertebrates**—including us—are descended from these animals.

The first four-legged animals on land were amphibians, much like our modern frogs and salamanders. Their ancestors were Devonian fish like ***Panderichthys*** and ***Eusthenopteron***, which had unusually stout bones supporting the four fins beneath their bodies. Some of these fish, the immediate ancestors of tetrapods, evolved to survive out of the water by using their lungs and mouths for breathing. ***Acanthostega*** and ***Tiktaalik*** may have lived at least partly on land. By about 358 million years ago, amphibians

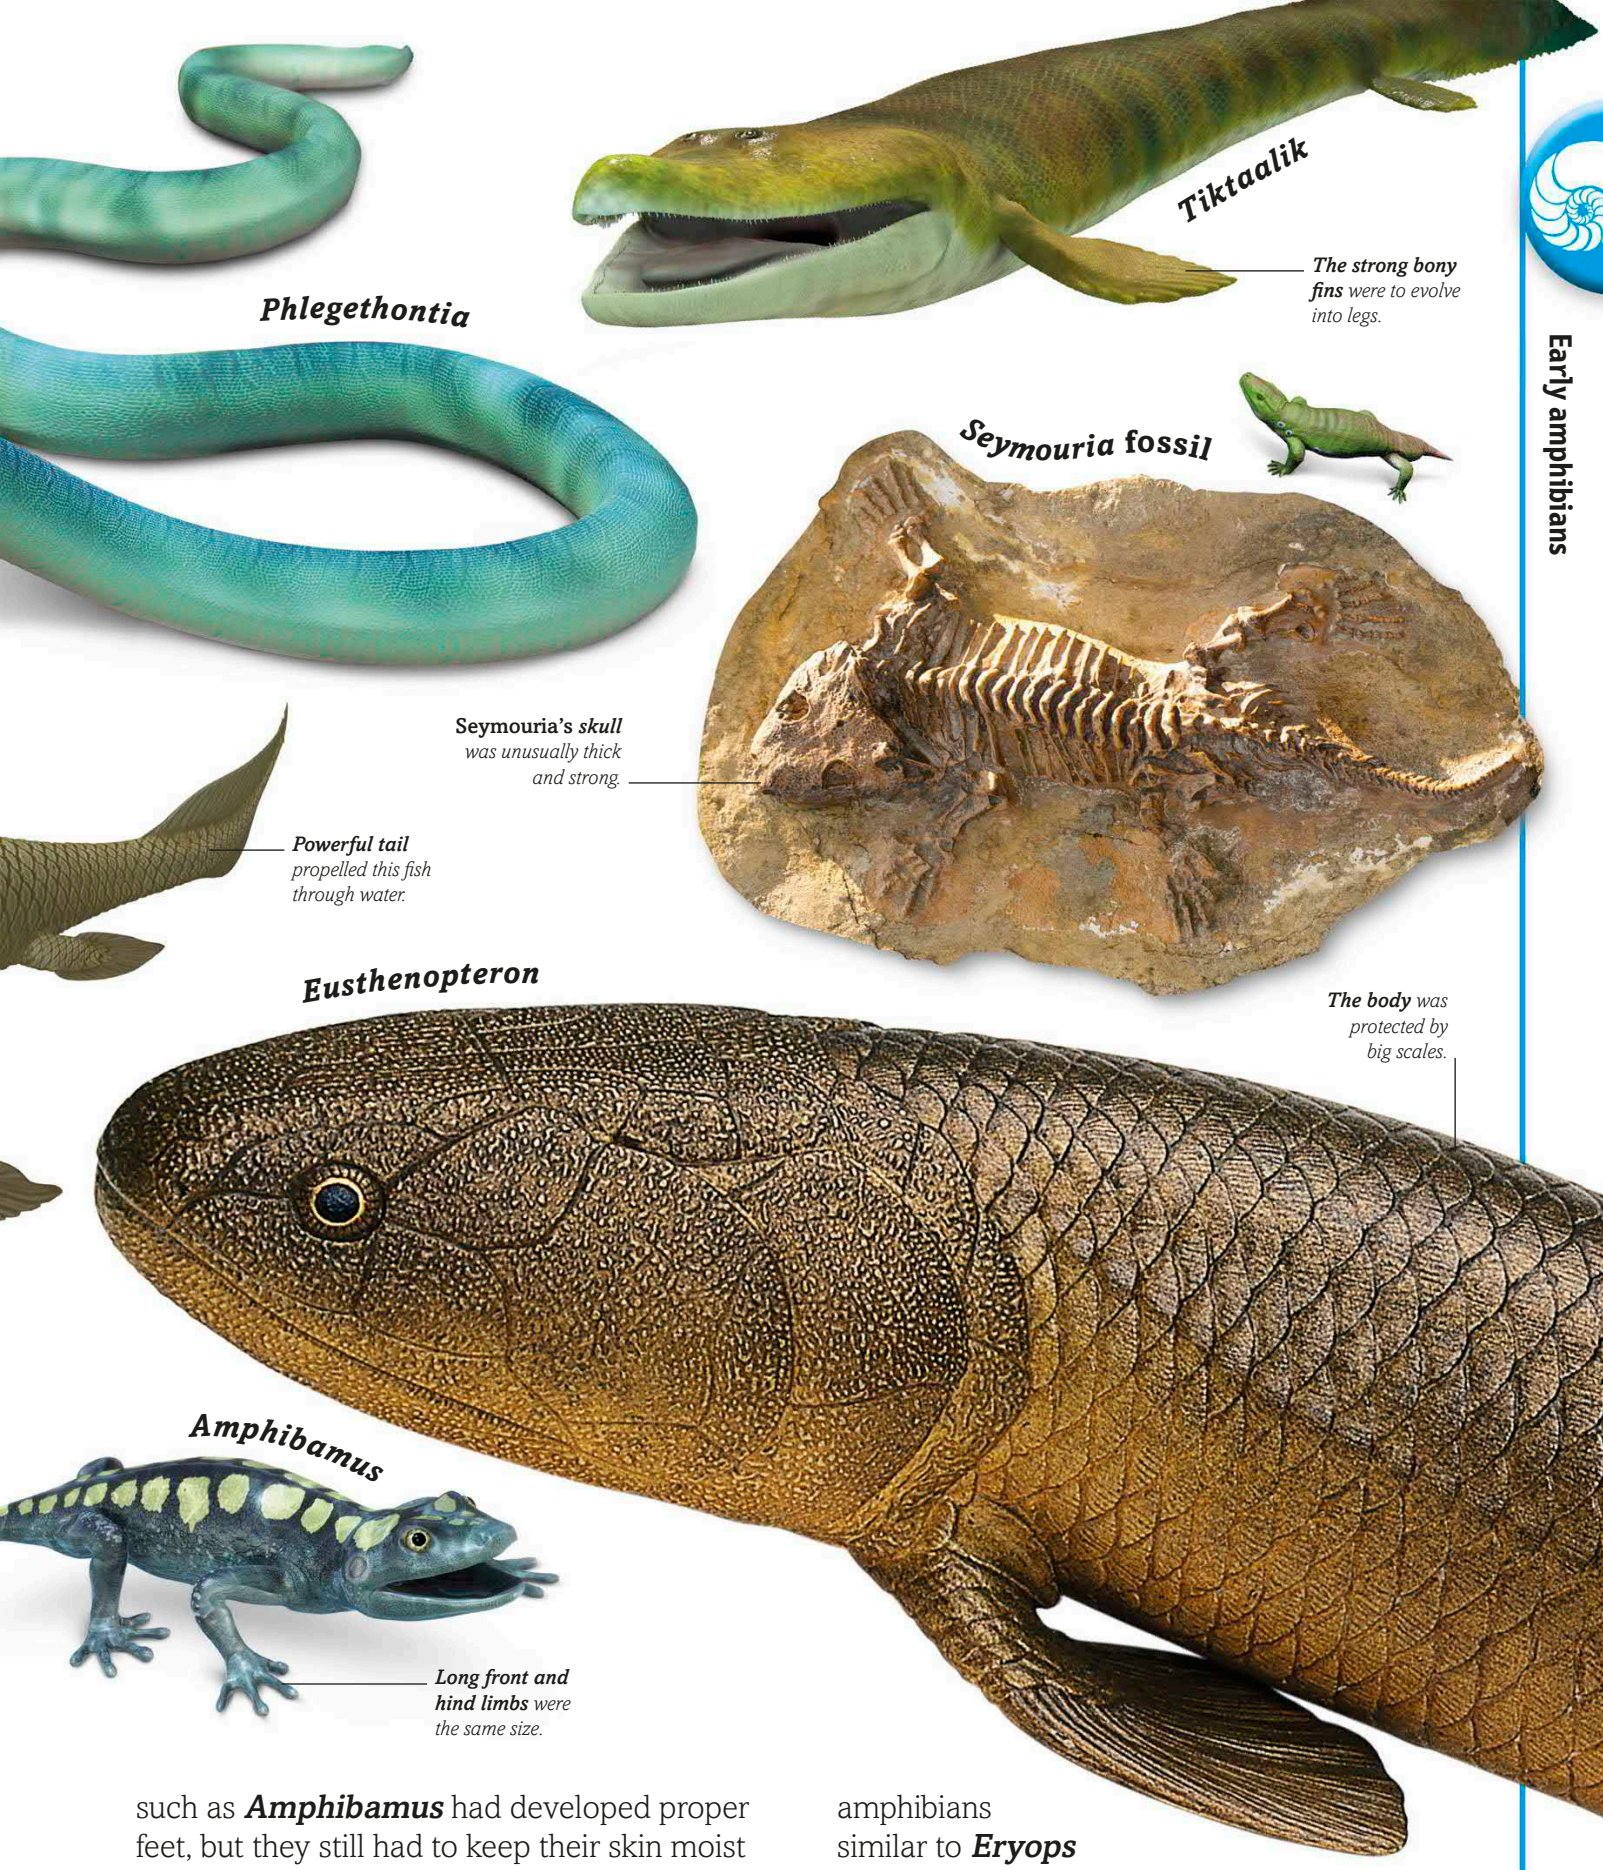

such as ***Amphibamus*** had developed proper feet, but they still had to keep their skin moist to survive. They also had to return to the water to lay their eggs, because the eggs of all amphibians are like those of fish, and dry up if they are not laid in wet places. Eventually, amphibians similar to ***Eryops*** and ***Seymouria*** evolved into a group of animals that were better adapted to live on dry land—the first reptiles.

Rise of the reptiles

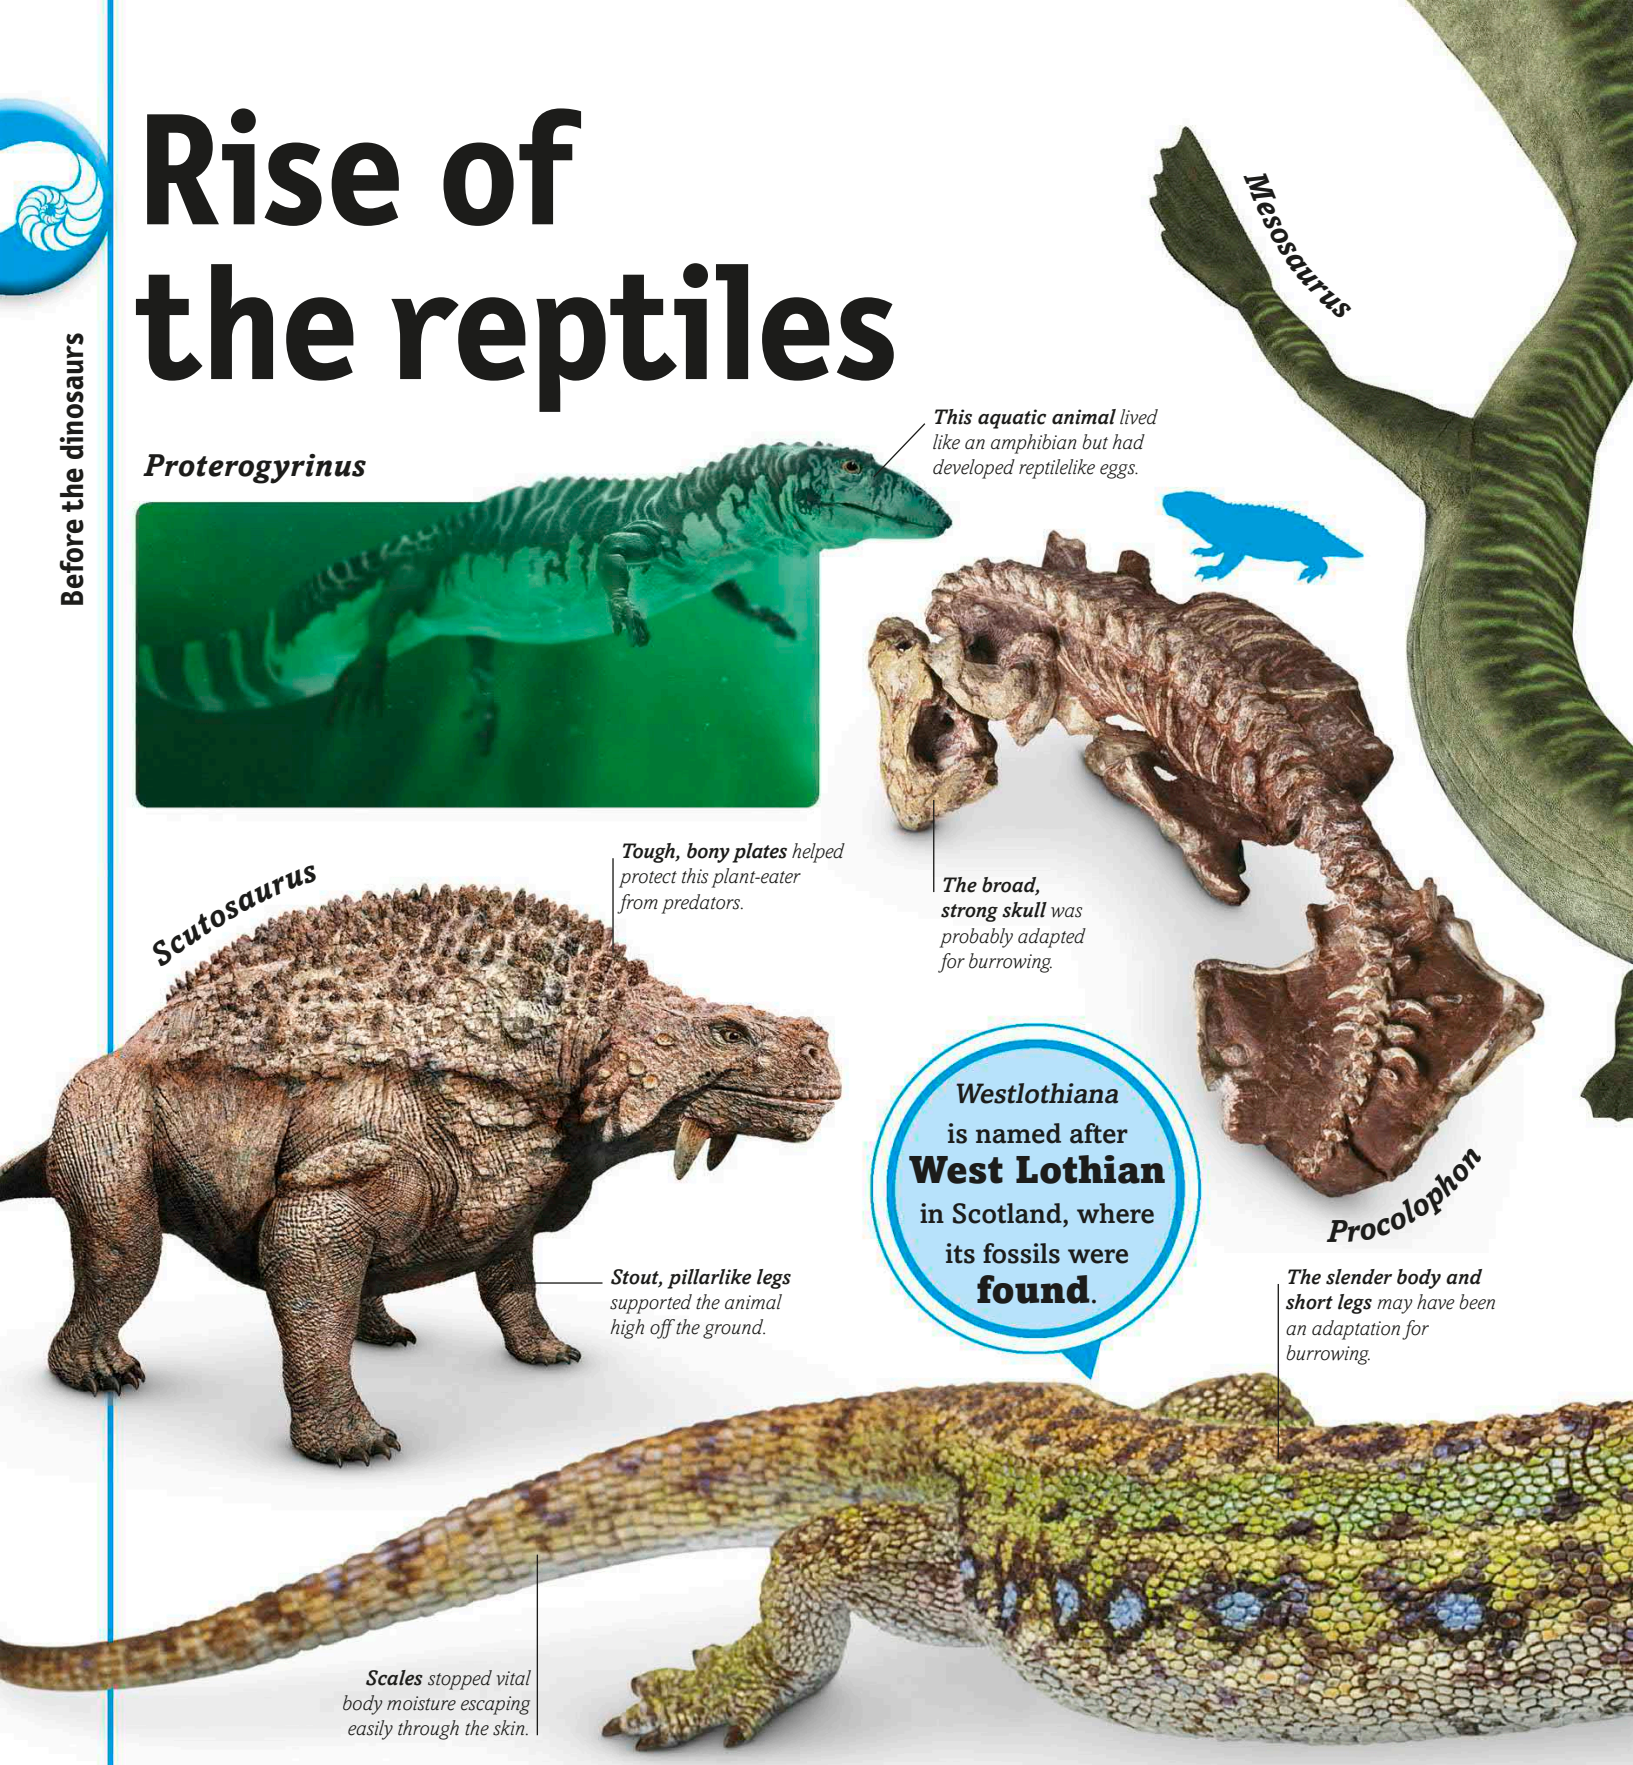

Early amphibians could live on land, but they lost body moisture through their thin skin and had to lay their eggs in water or damp places if they were to survive. During the Carboniferous Period, some amphibianlike animals resembling ***Proterogyrinus*** and ***Westlothiana*** evolved eggs enclosed in shells that retained moisture, so they could be laid in dry places. They also developed thicker skin covered with tough, waterproof scales that stopped the body losing moisture. They were the ancestors of the first true reptiles—animals such

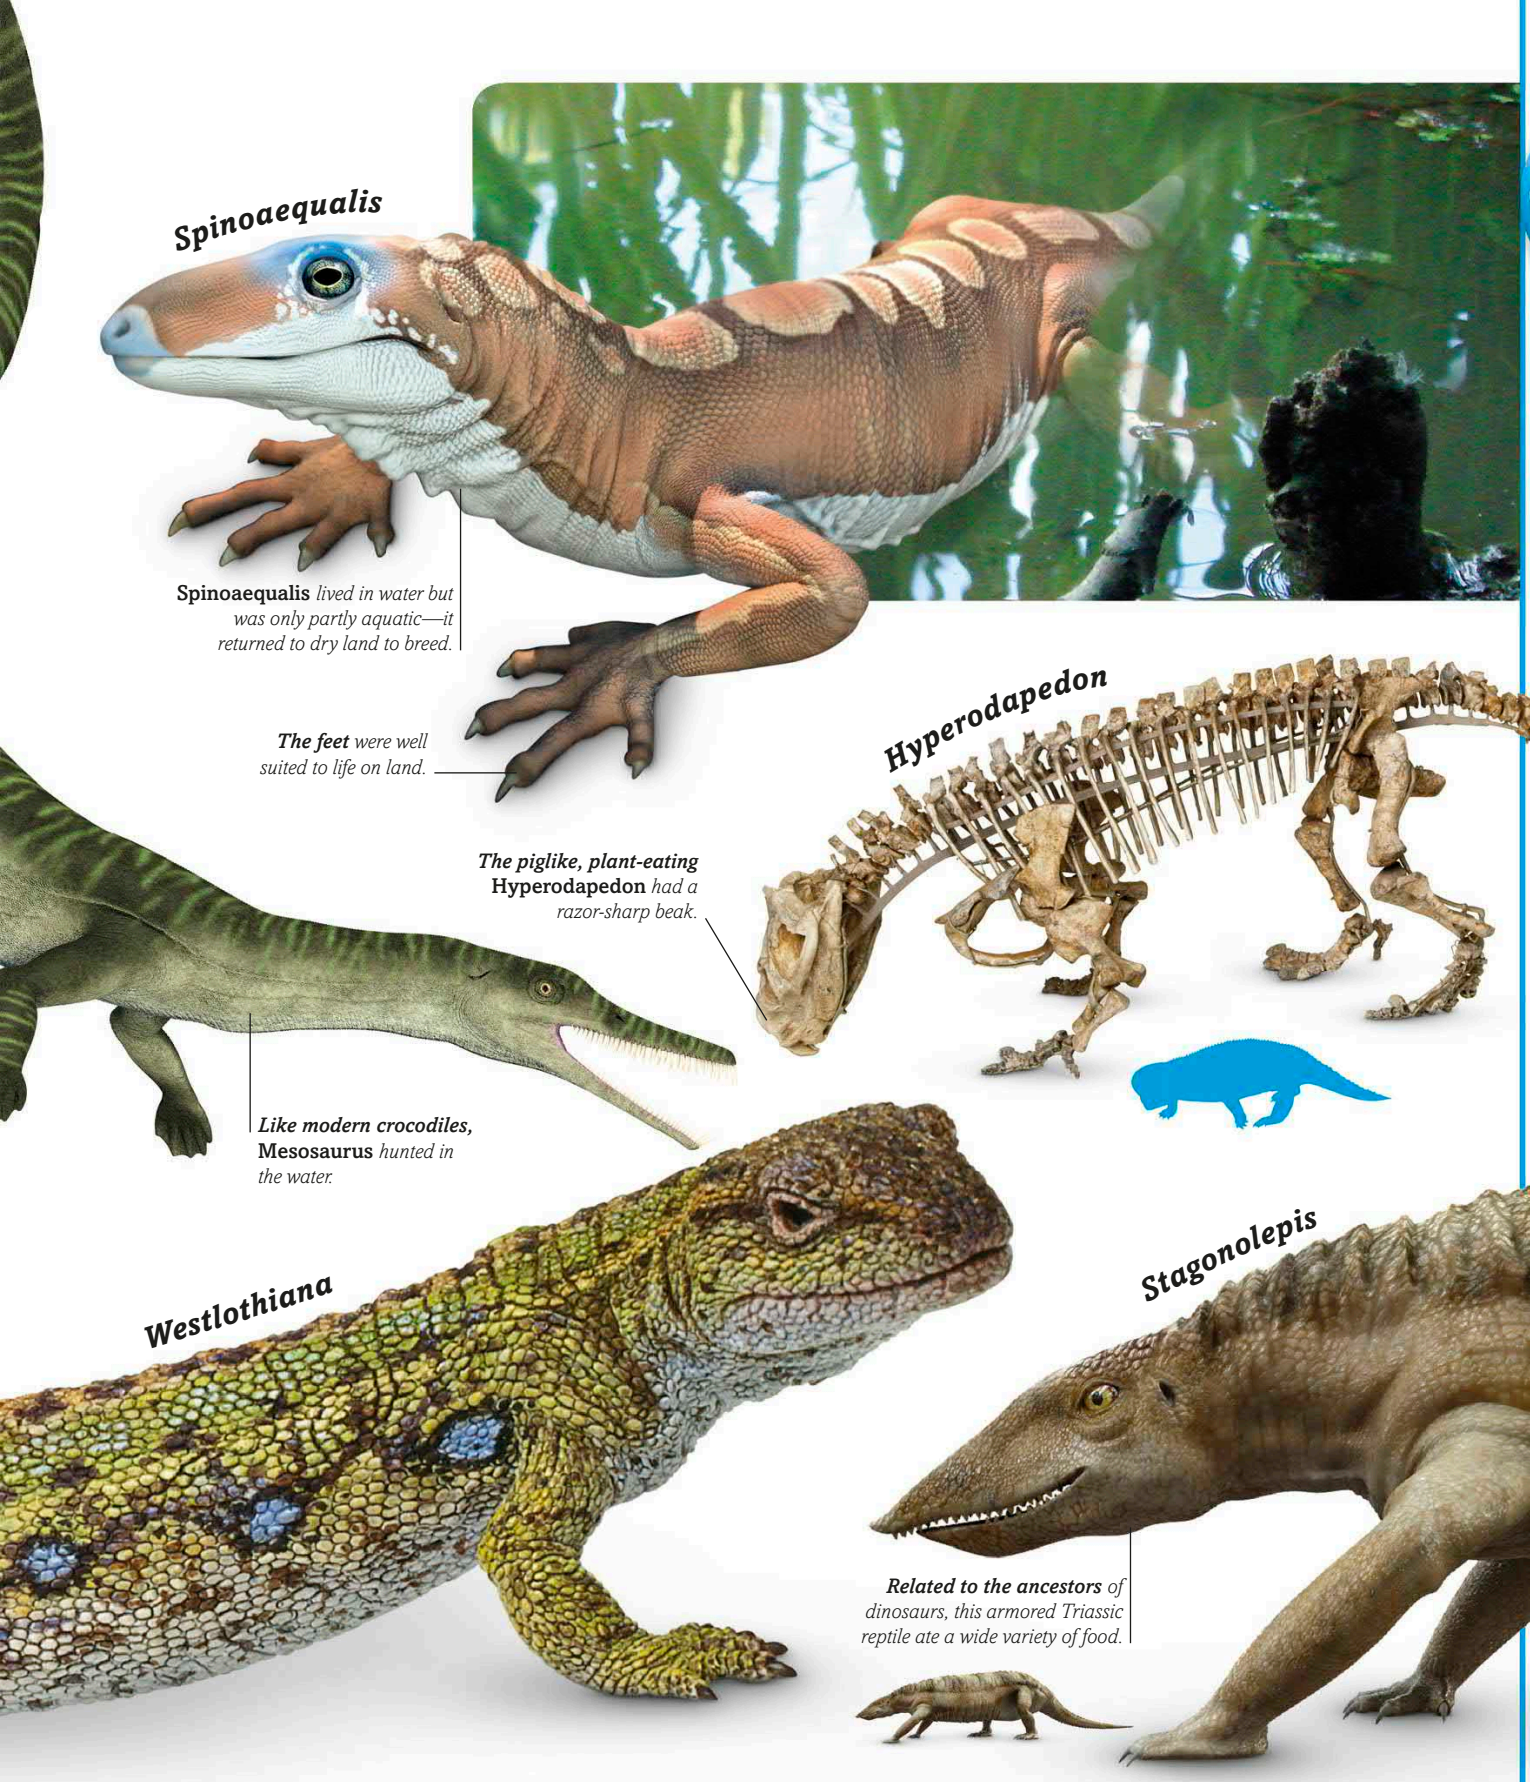

as ***Spinoaequalis*** and ***Mesosaurus***, which would ultimately give rise to lizards, snakes, and crocodiles. This new type of vertebrate was ideally equipped to colonize dry land during the Permian Period—an age of huge deserts that began 299 million years ago. Permian reptiles included a variety of plant-eaters like the armored ***Scutosaurus*** as well as sharp-toothed hunters. Some survived the catastrophic mass extinction at the end of the Permian and became the ancestors of the dinosaurs.

Reptiles branch out

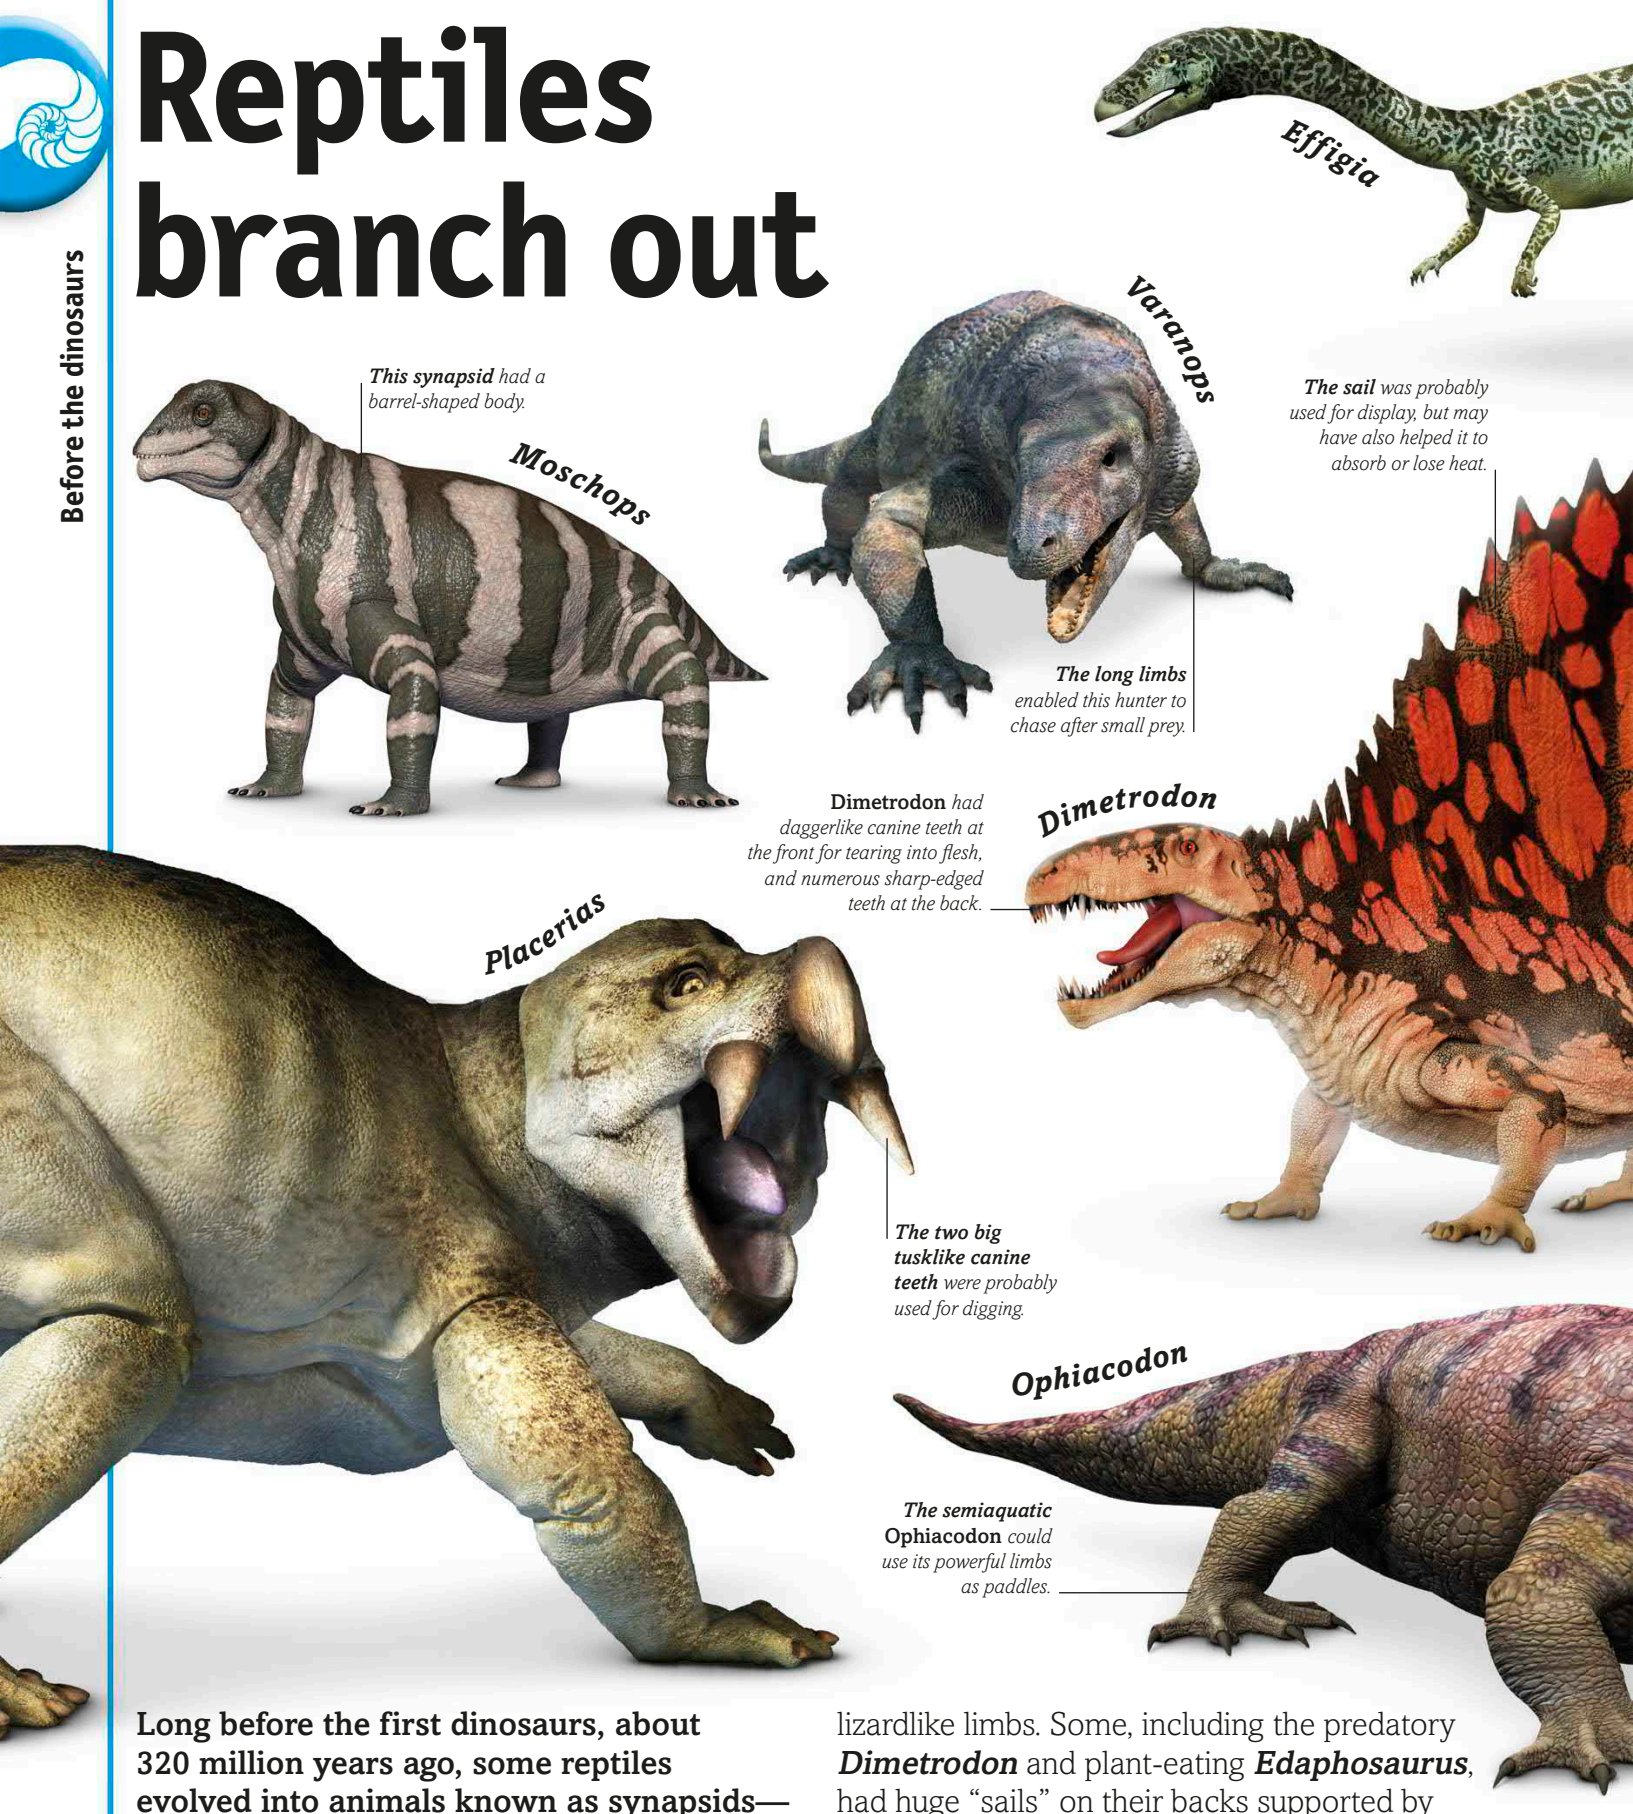

Long before the first dinosaurs, about 320 million years ago, some reptiles evolved into animals known as synapsids—they would eventually give rise to the mammals. The earliest of these animals—***Ophiacodon*** and ***Varanops***—had sprawling lizardlike limbs. Some, including the predatory ***Dimetrodon*** and plant-eating ***Edaphosaurus***, had huge "sails" on their backs supported by rodlike spine bones. Later, about 299 million years ago, these reptilelike animals gave rise to a group of animals called dicynodonts—***Placerias***

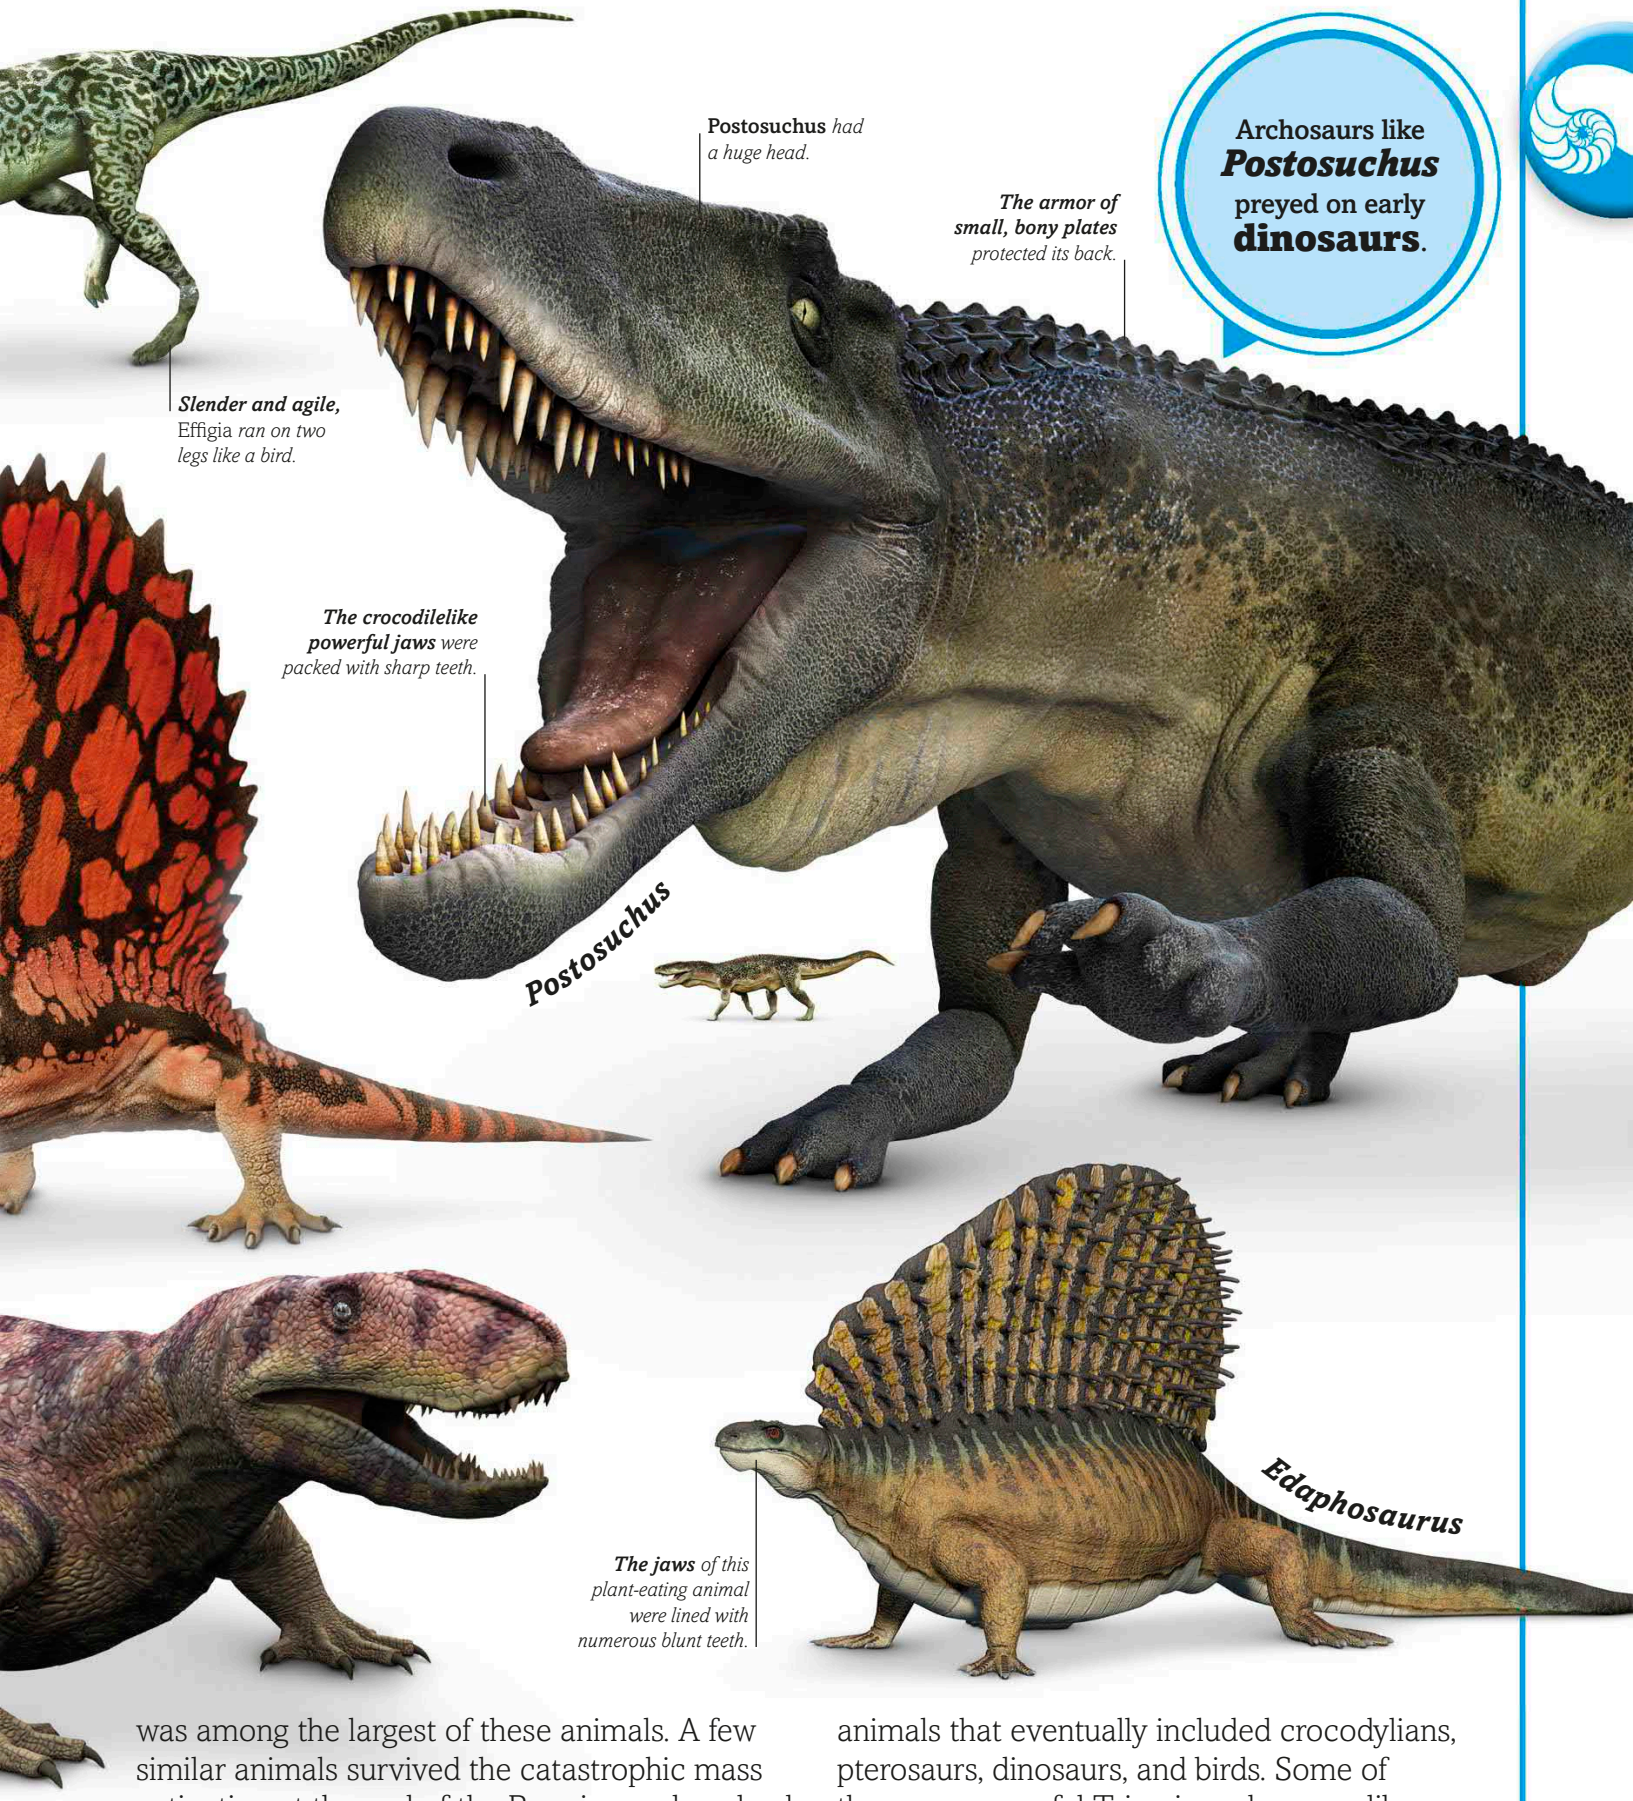

was among the largest of these animals. A few similar animals survived the catastrophic mass extinction at the end of the Permian and evolved into cynodonts, which became the ancestors of modern mammals. Meanwhile, the reptile line had given rise to archosaurs—the group of animals that eventually included crocodylians, pterosaurs, dinosaurs, and birds. Some of the more powerful Triassic archosaurs, like ***Postosuchus***, were the top predators of their time. Others, including ***Effigia***, were very similar to the first dinosaurs.

HUNGRY HUNTER Concealed by its camouflaged scaly skin, which closely matches the surrounding ferns, a hungry, sail-backed *Arizonasaurus* stalks a herd of plant-eating dicynodonts—relatives of mammals. Reptiles like *Arizonasaurus* were the main threat to plant-eaters in the mid-Triassic Period, before the evolution of big predatory dinosaurs.

The first dinosaurs evolved during the Triassic Period, but they were not the giant, ruling reptiles that we are familiar with. The Triassic world was ruled by reptiles of a different type—animals like *Arizonasaurus*. They were archosaurs, as were the dinosaurs, but had evolved along different lines to resemble high-walking crocodiles. Many had massive jaws and teeth and were capable of overpowering and eating any animal they might encounter. *Arizonasaurus* belonged to a group of archosaurs that had tall "sails" on their backs, supported by bones extending up from the spine. The function of the sail is uncertain, but it may have been important during displays to rival animals of the same species.

THE AGE OF DINOSAURS

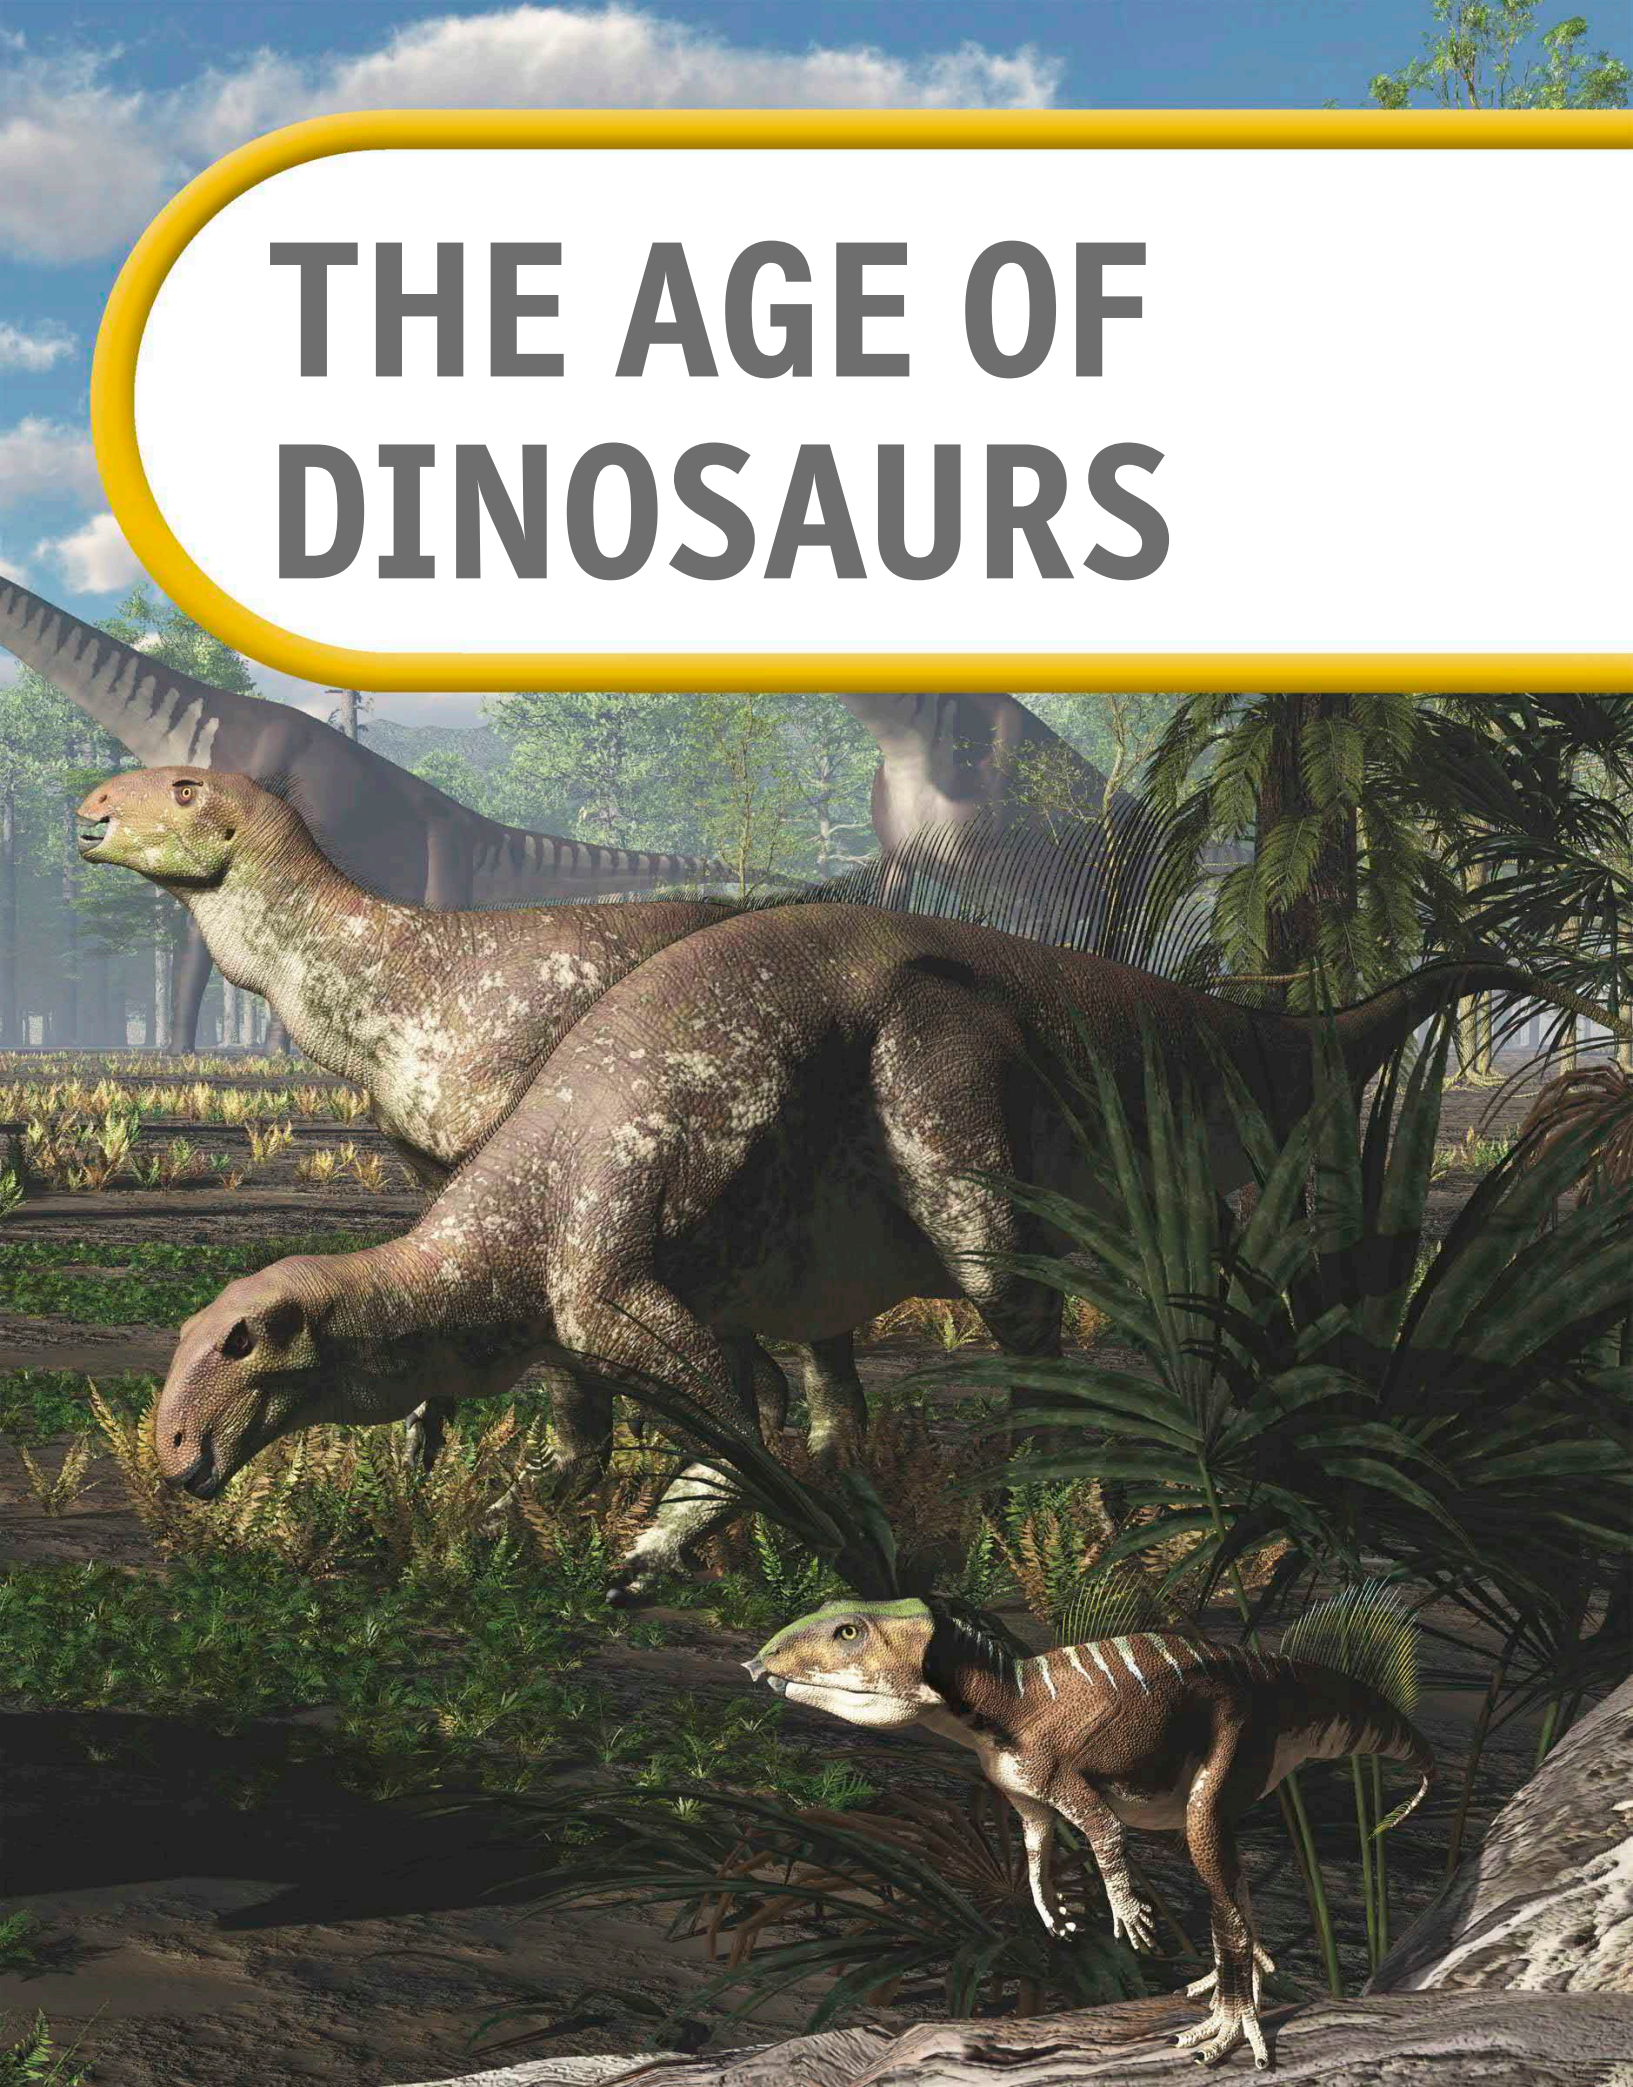

The first dinosaurs

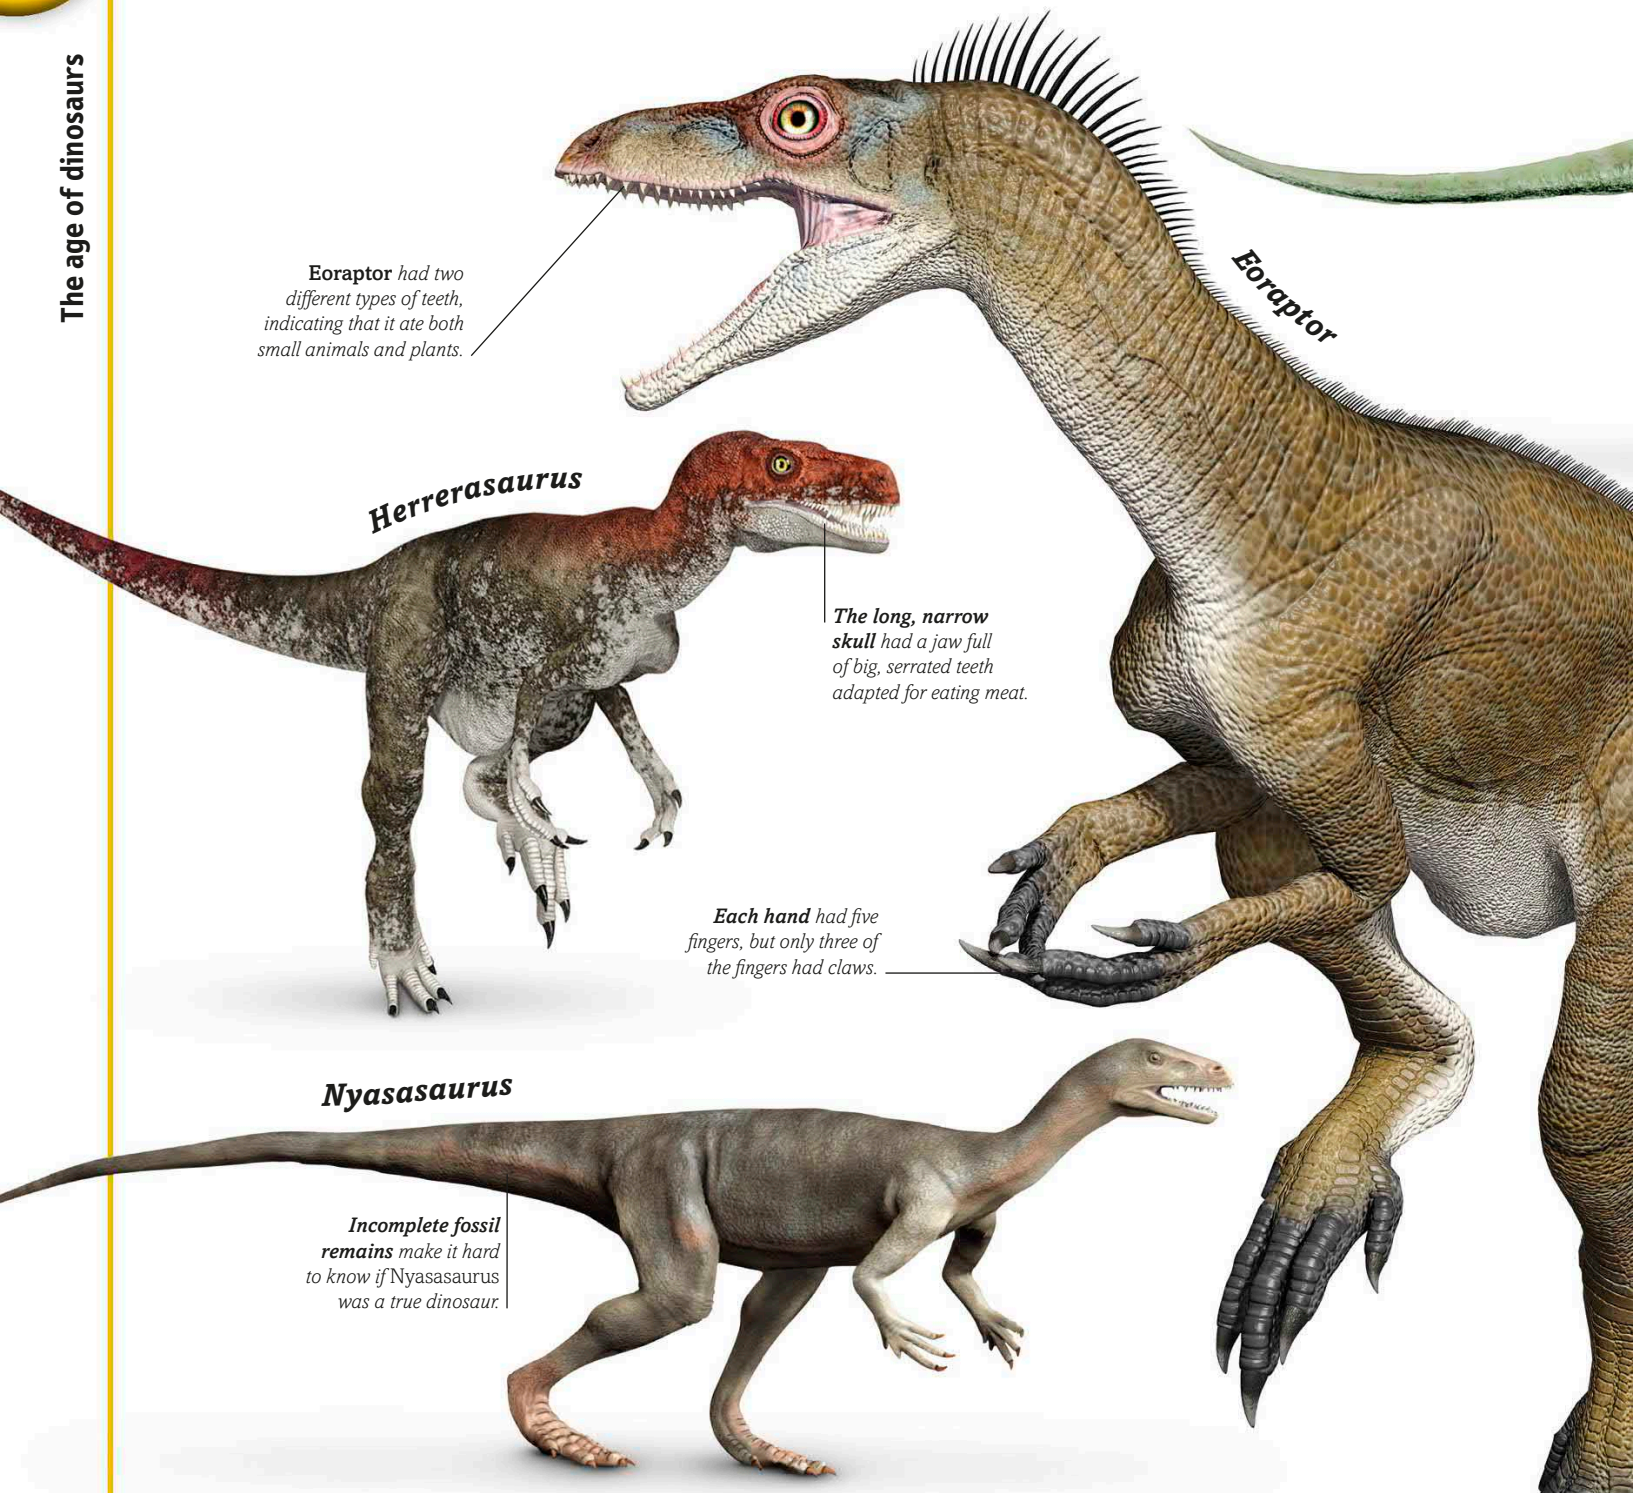

Although dinosaurs evolved into some of the biggest and most spectacular land animals the world has seen, they had small beginnings. About 240 million years ago, in the early Triassic, the largest reptiles were powerful, crocodilelike archosaurs. These had some smaller archosaur relatives with slender bodies and long legs, such as ***Marasuchus***, which was just 28 in (70 cm) long and chased after small prey on its hind legs. The bigger, slightly more dinosaurlike ***Silesaurus*** had a similar build, but seems to have eaten plants,

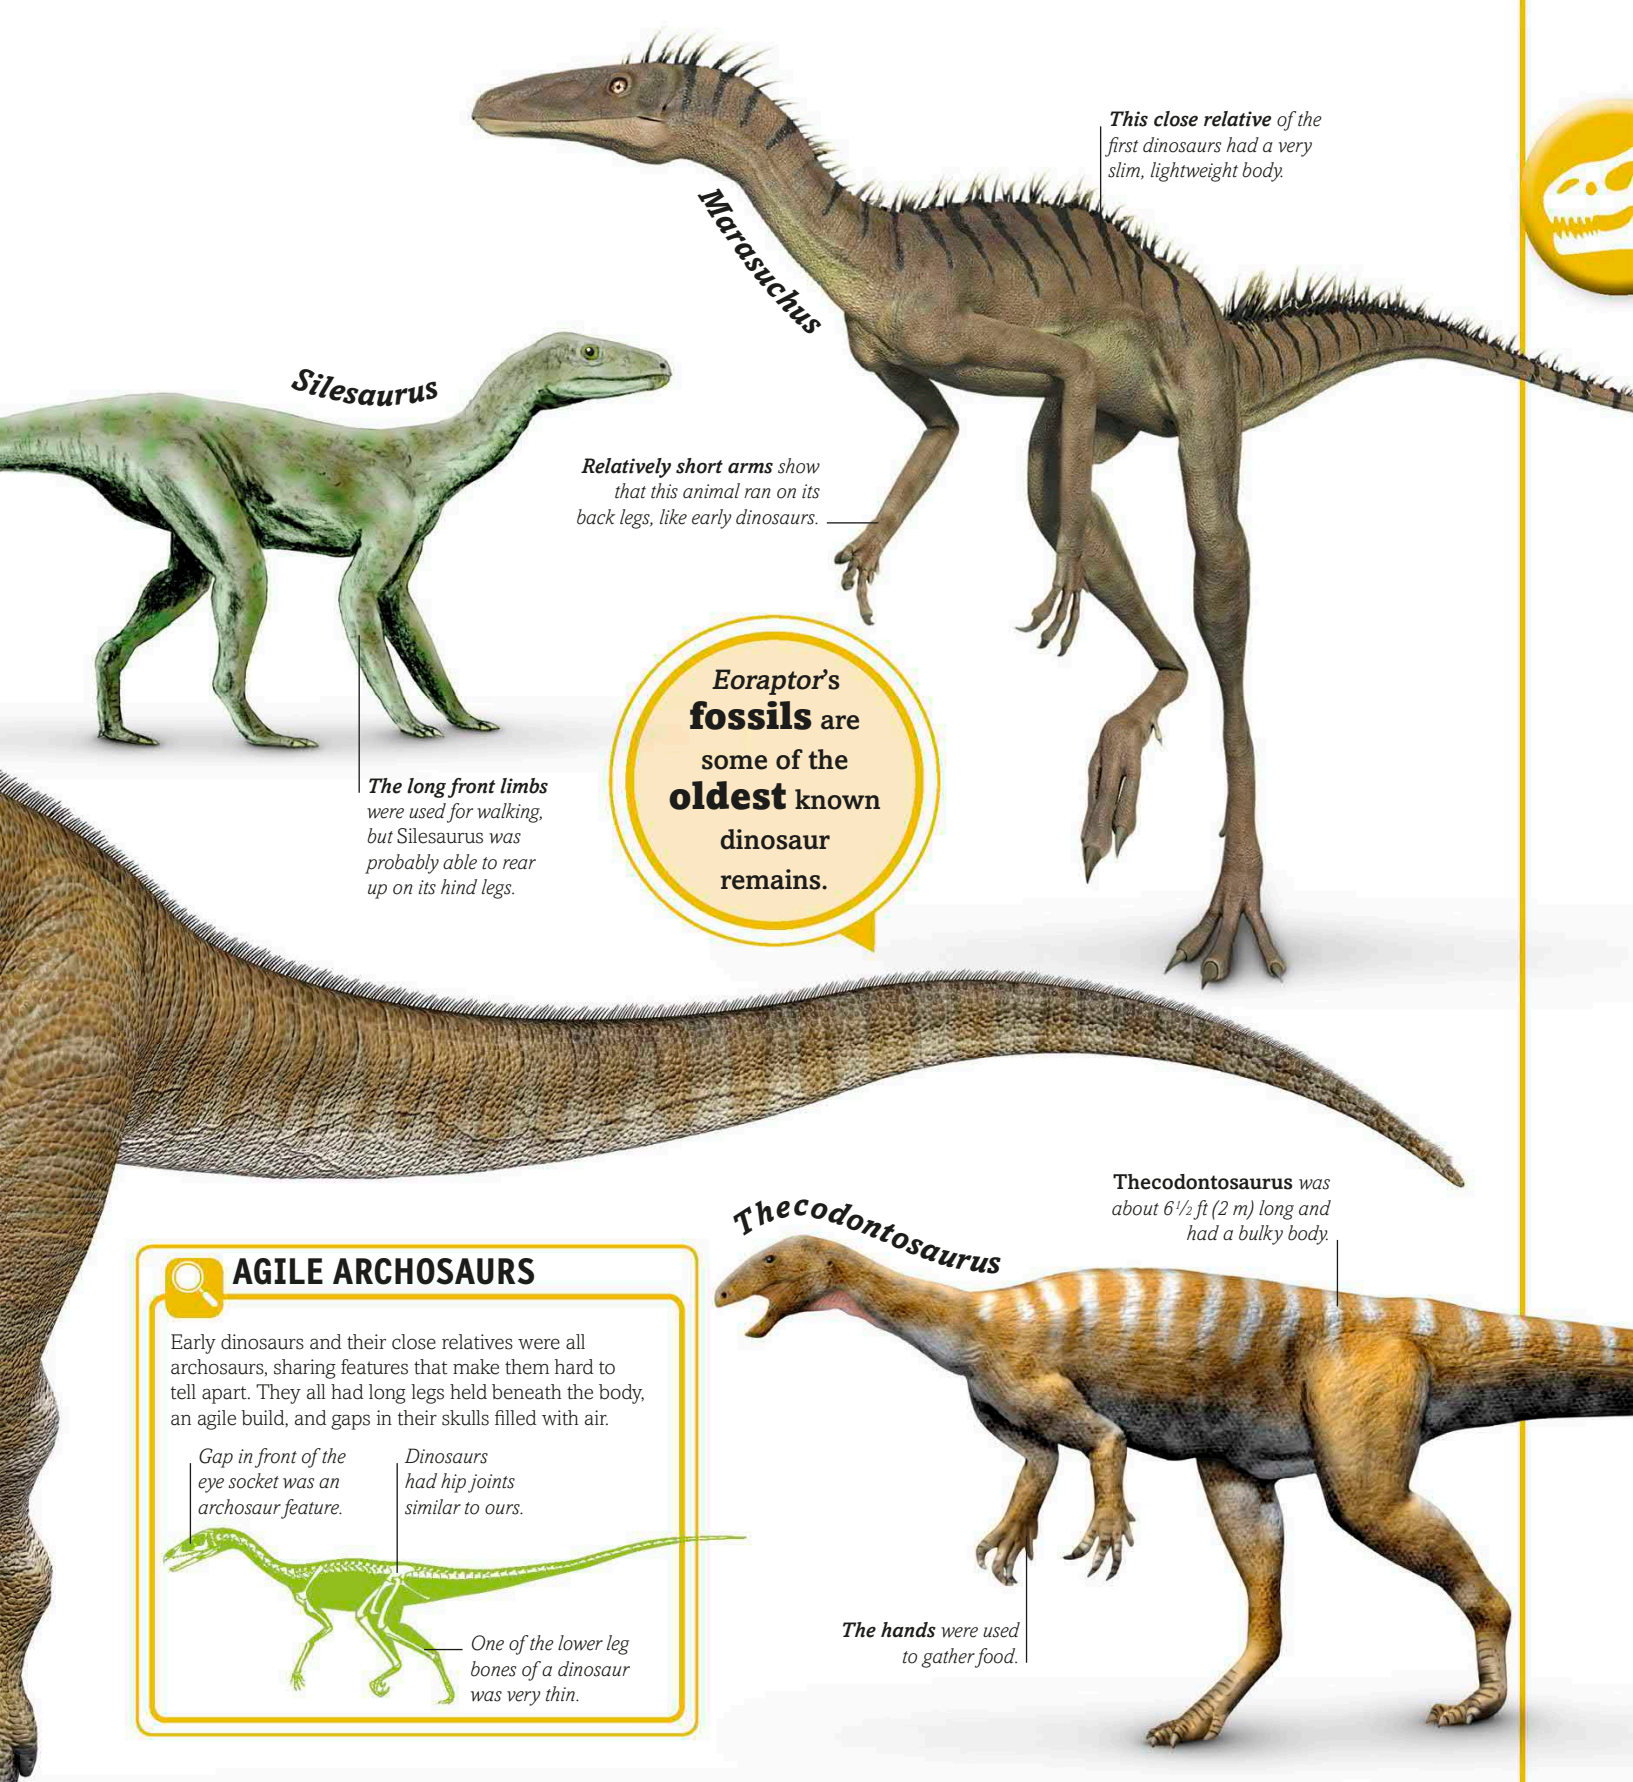

AGILE ARCHOSAURS

Early dinosaurs and their close relatives were all archosaurs, sharing features that make them hard to tell apart. They all had long legs held beneath the body, an agile build, and gaps in their skulls filled with air.

as well as small animals. These light, agile creatures were closely related to animals like ***Nyasasaurus***, which may have been one of the first true dinosaurs. The first definite dinosaurs—animals like ***Eoraptor***—lived about 230 million years ago and were probably omnivores that ate a variety of foods. They soon gave rise to specialized predators like ***Herrerasaurus***, as well as plant-eaters like ***Thecodontosaurus***. These animals were the ancestors of the giant dinosaurs that were to dominate life on land for the next 140 million years.

Prosauropods

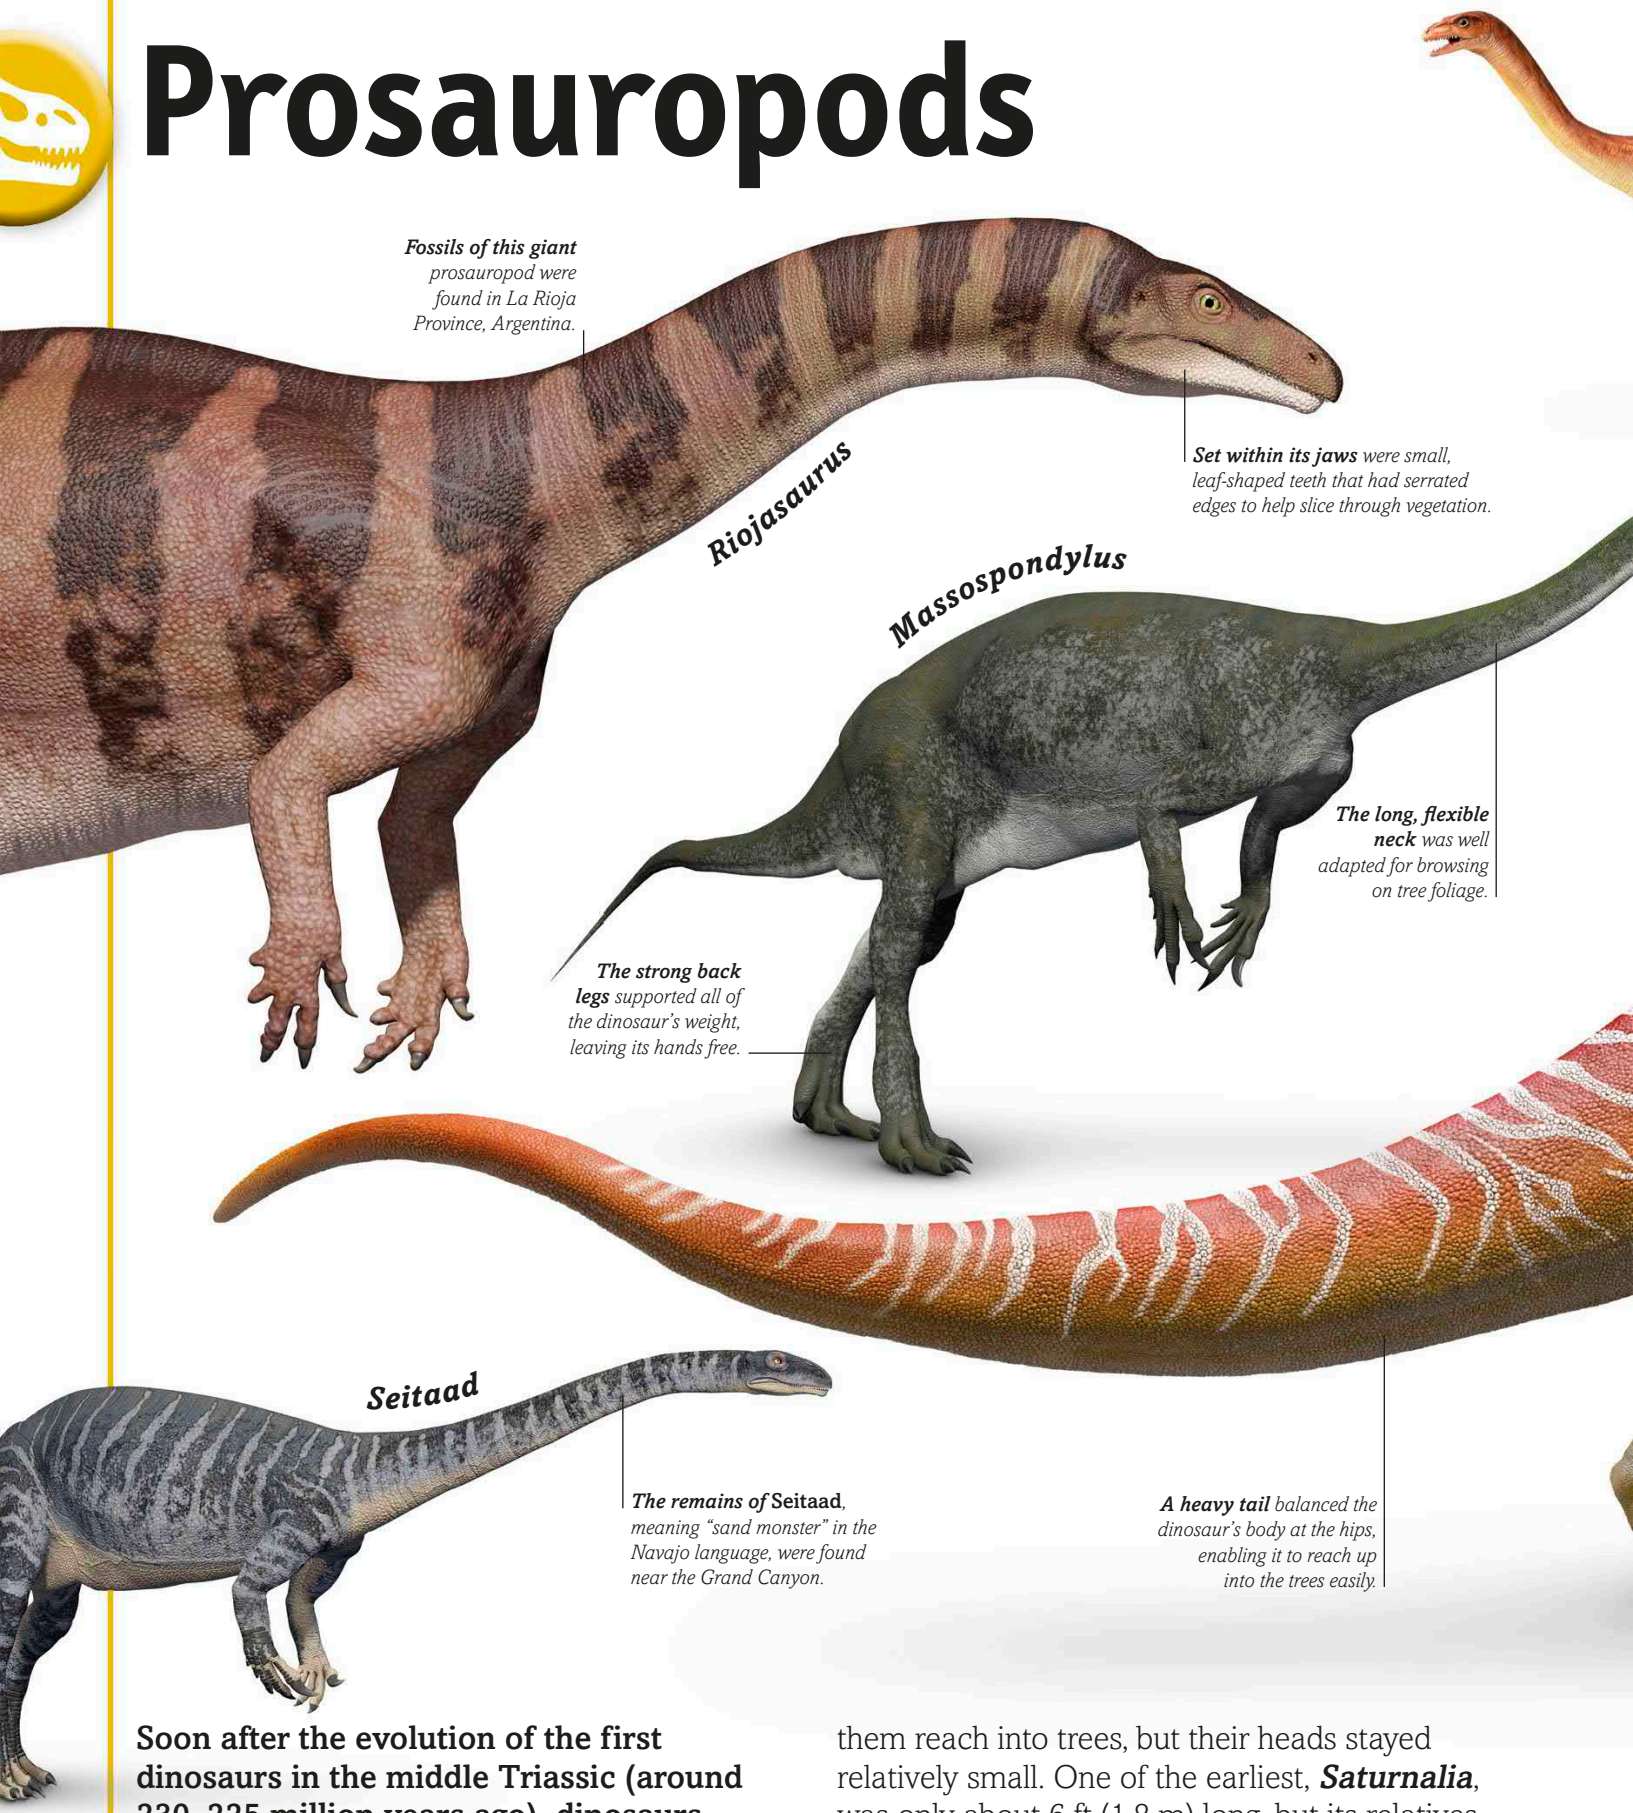

Soon after the evolution of the first dinosaurs in the middle Triassic (around 230–225 million years ago), dinosaurs began to diversify into species with different lifestyles. Some specialized in eating plants. They evolved long necks that helped them reach into trees, but their heads stayed relatively small. One of the earliest, ***Saturnalia***, was only about 6 ft (1.8 m) long, but its relatives were to get a lot bigger; by the late Triassic, ***Riojasaurus*** was about 33 ft (10 m) long and weighed as much as an elephant. These

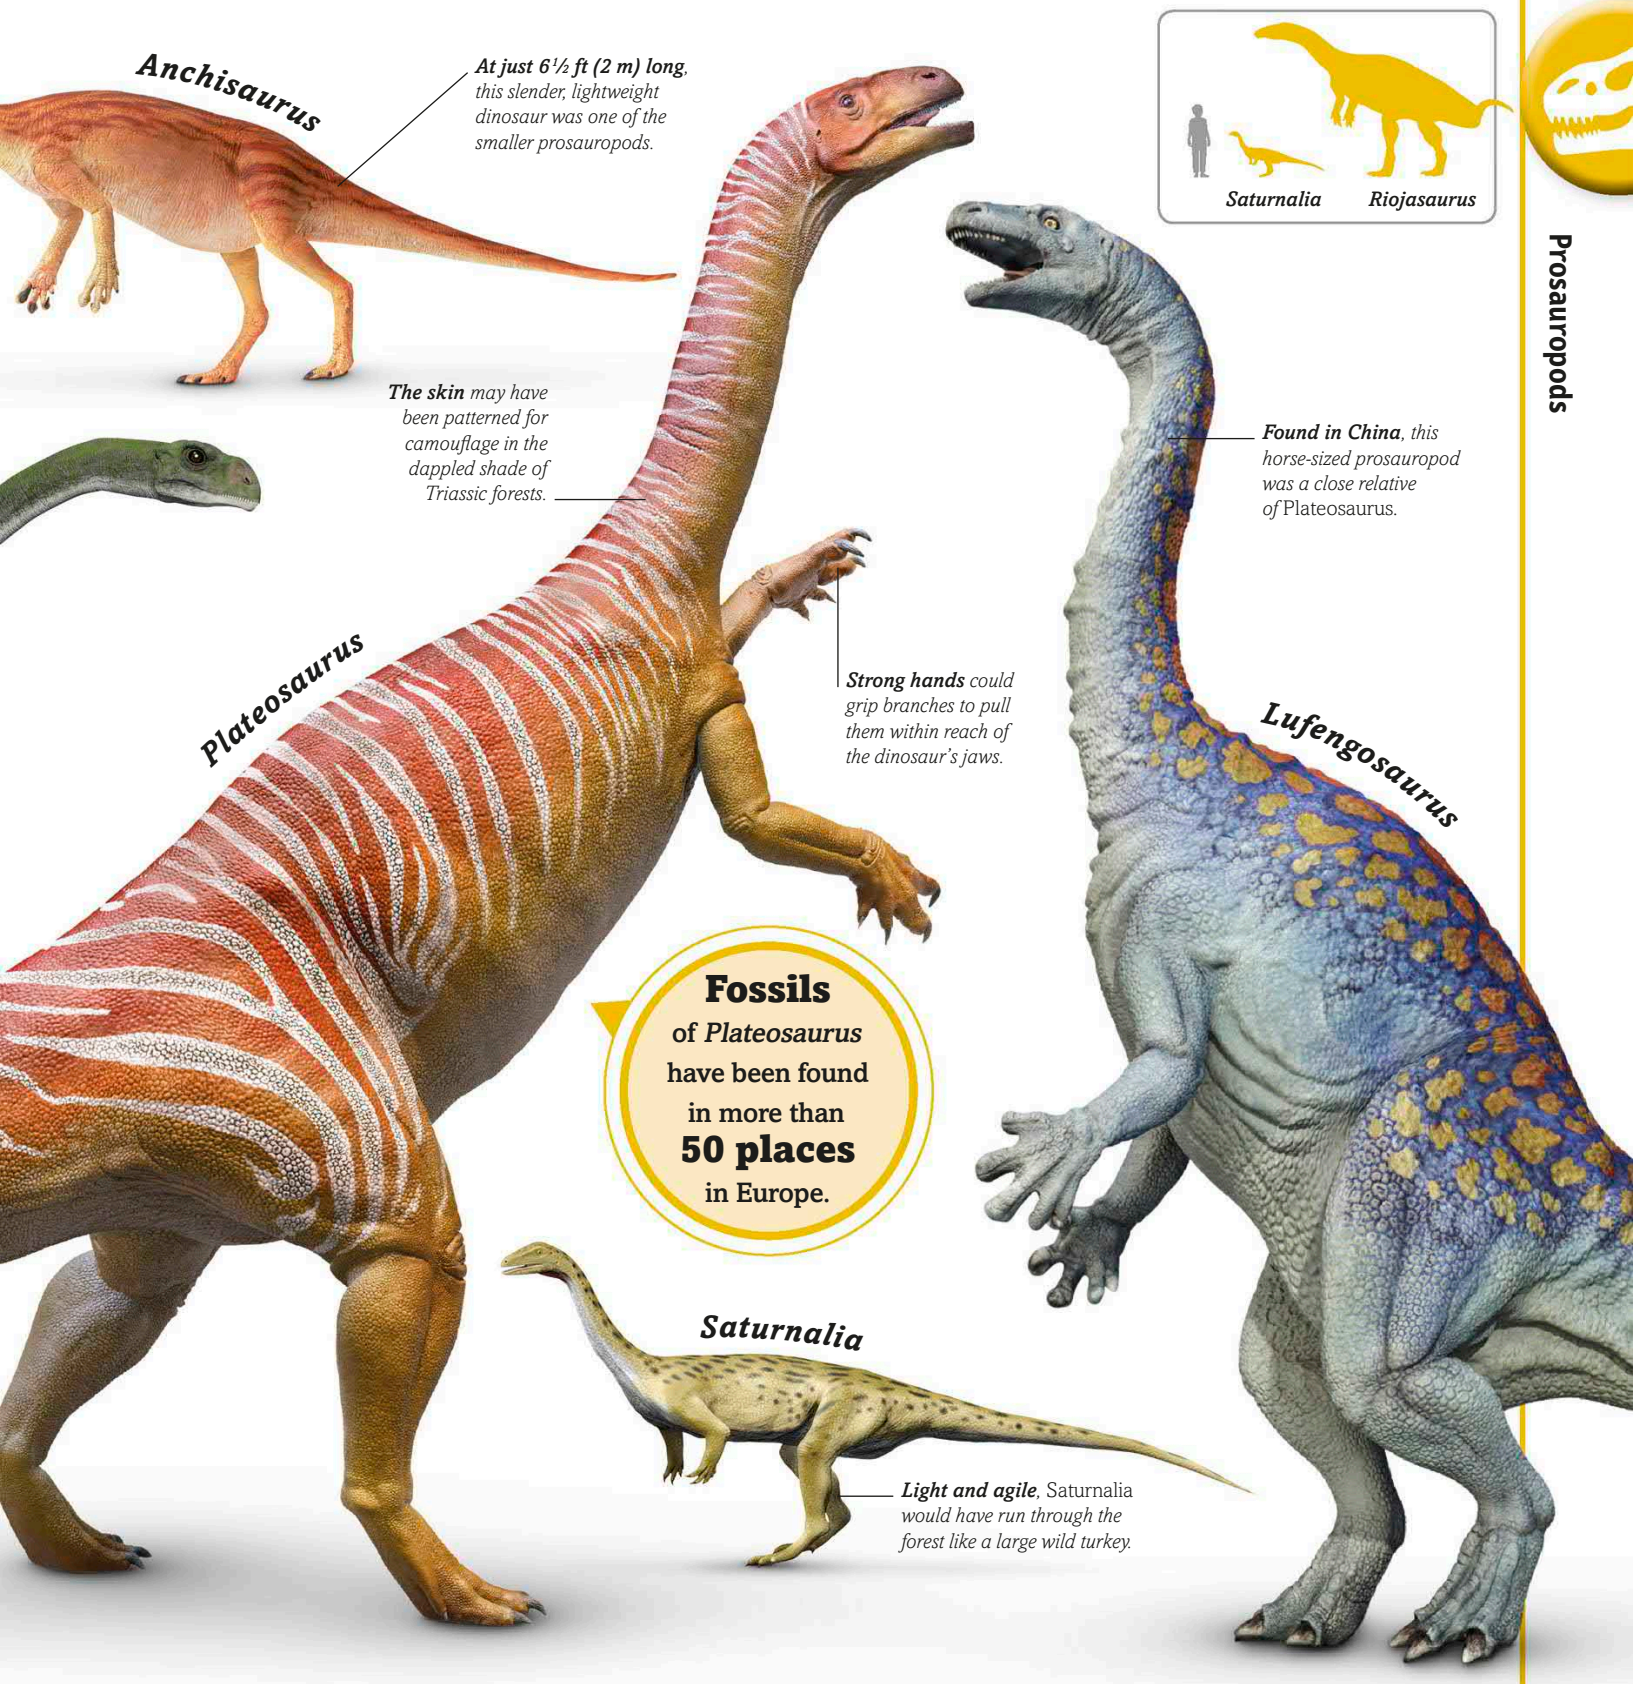

dinosaurs were the ancestors of the enormous sauropods, so they are known as prosauropods. They stood on two legs, balanced by their long tails, and used their shorter arms to gather food. ***Plateosaurus*** had grasping hands with four fingers and a powerful clawed thumb, which may also have been useful for defense. When it closed its jaws, its upper teeth overlapped the lower ones like scissor blades to slice through leaves. The tough, fibrous plant material was processed in a big digestive system to extract as much food value as possible.

Sauropods

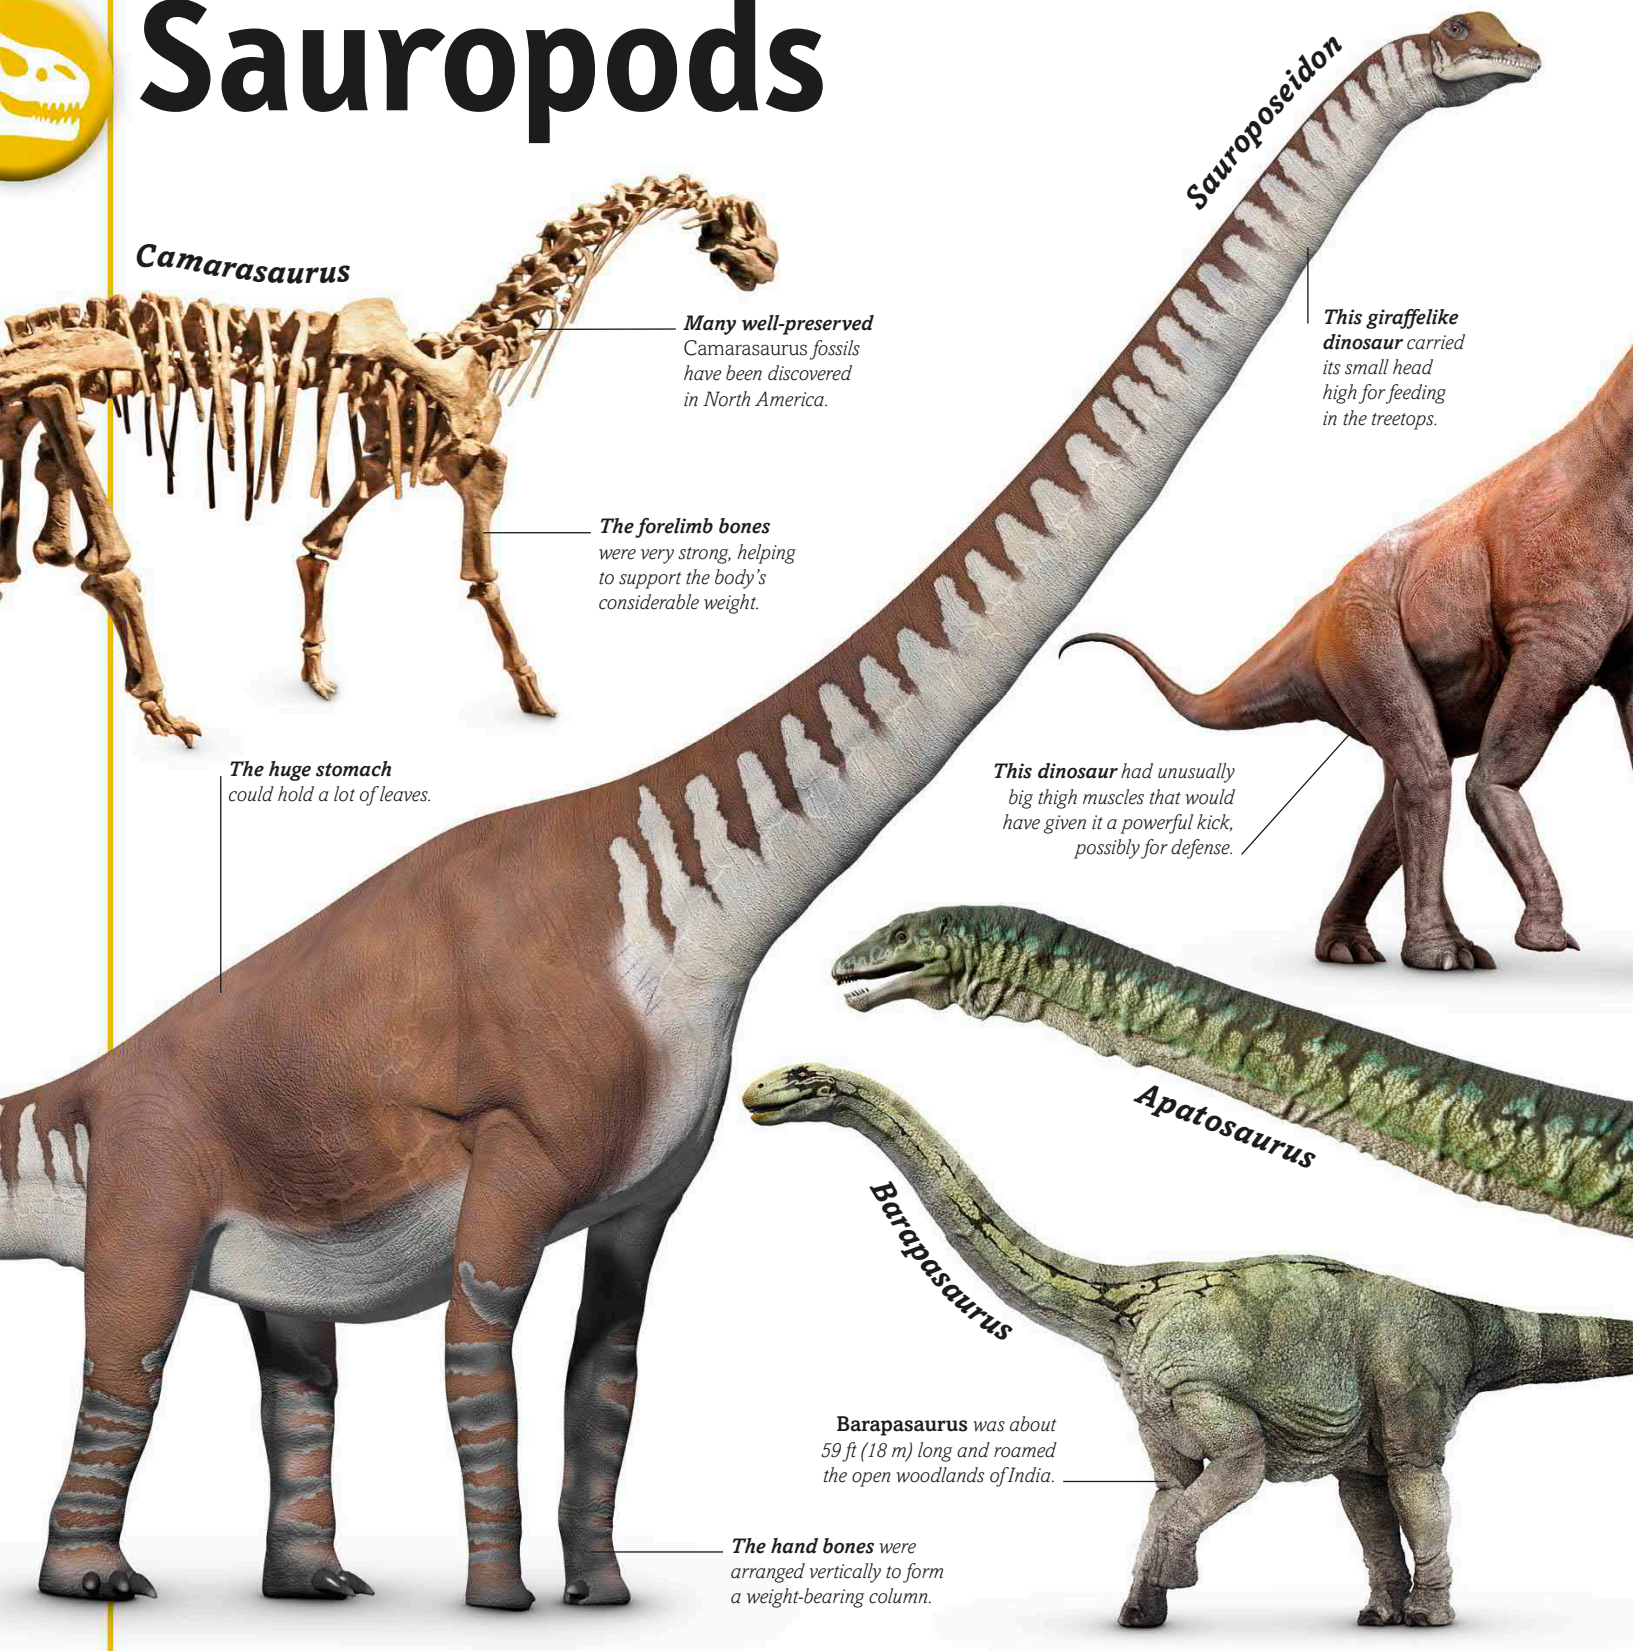

With their bus-sized bodies and elongated necks and tails, sauropods were the biggest dinosaurs ever to roam the Earth. These giants were plant-eaters; they would have browsed continually to fuel their enormous bodies. The earliest ones appeared about 200 million years ago and were similar to ***Barapasaurus***. Unlike their prosauropod ancestors, they used their arms to support their bodies, and their hands became weight-bearing feet. Despite this, many could probably rear up on their hind legs to feed in the treetops. Others,

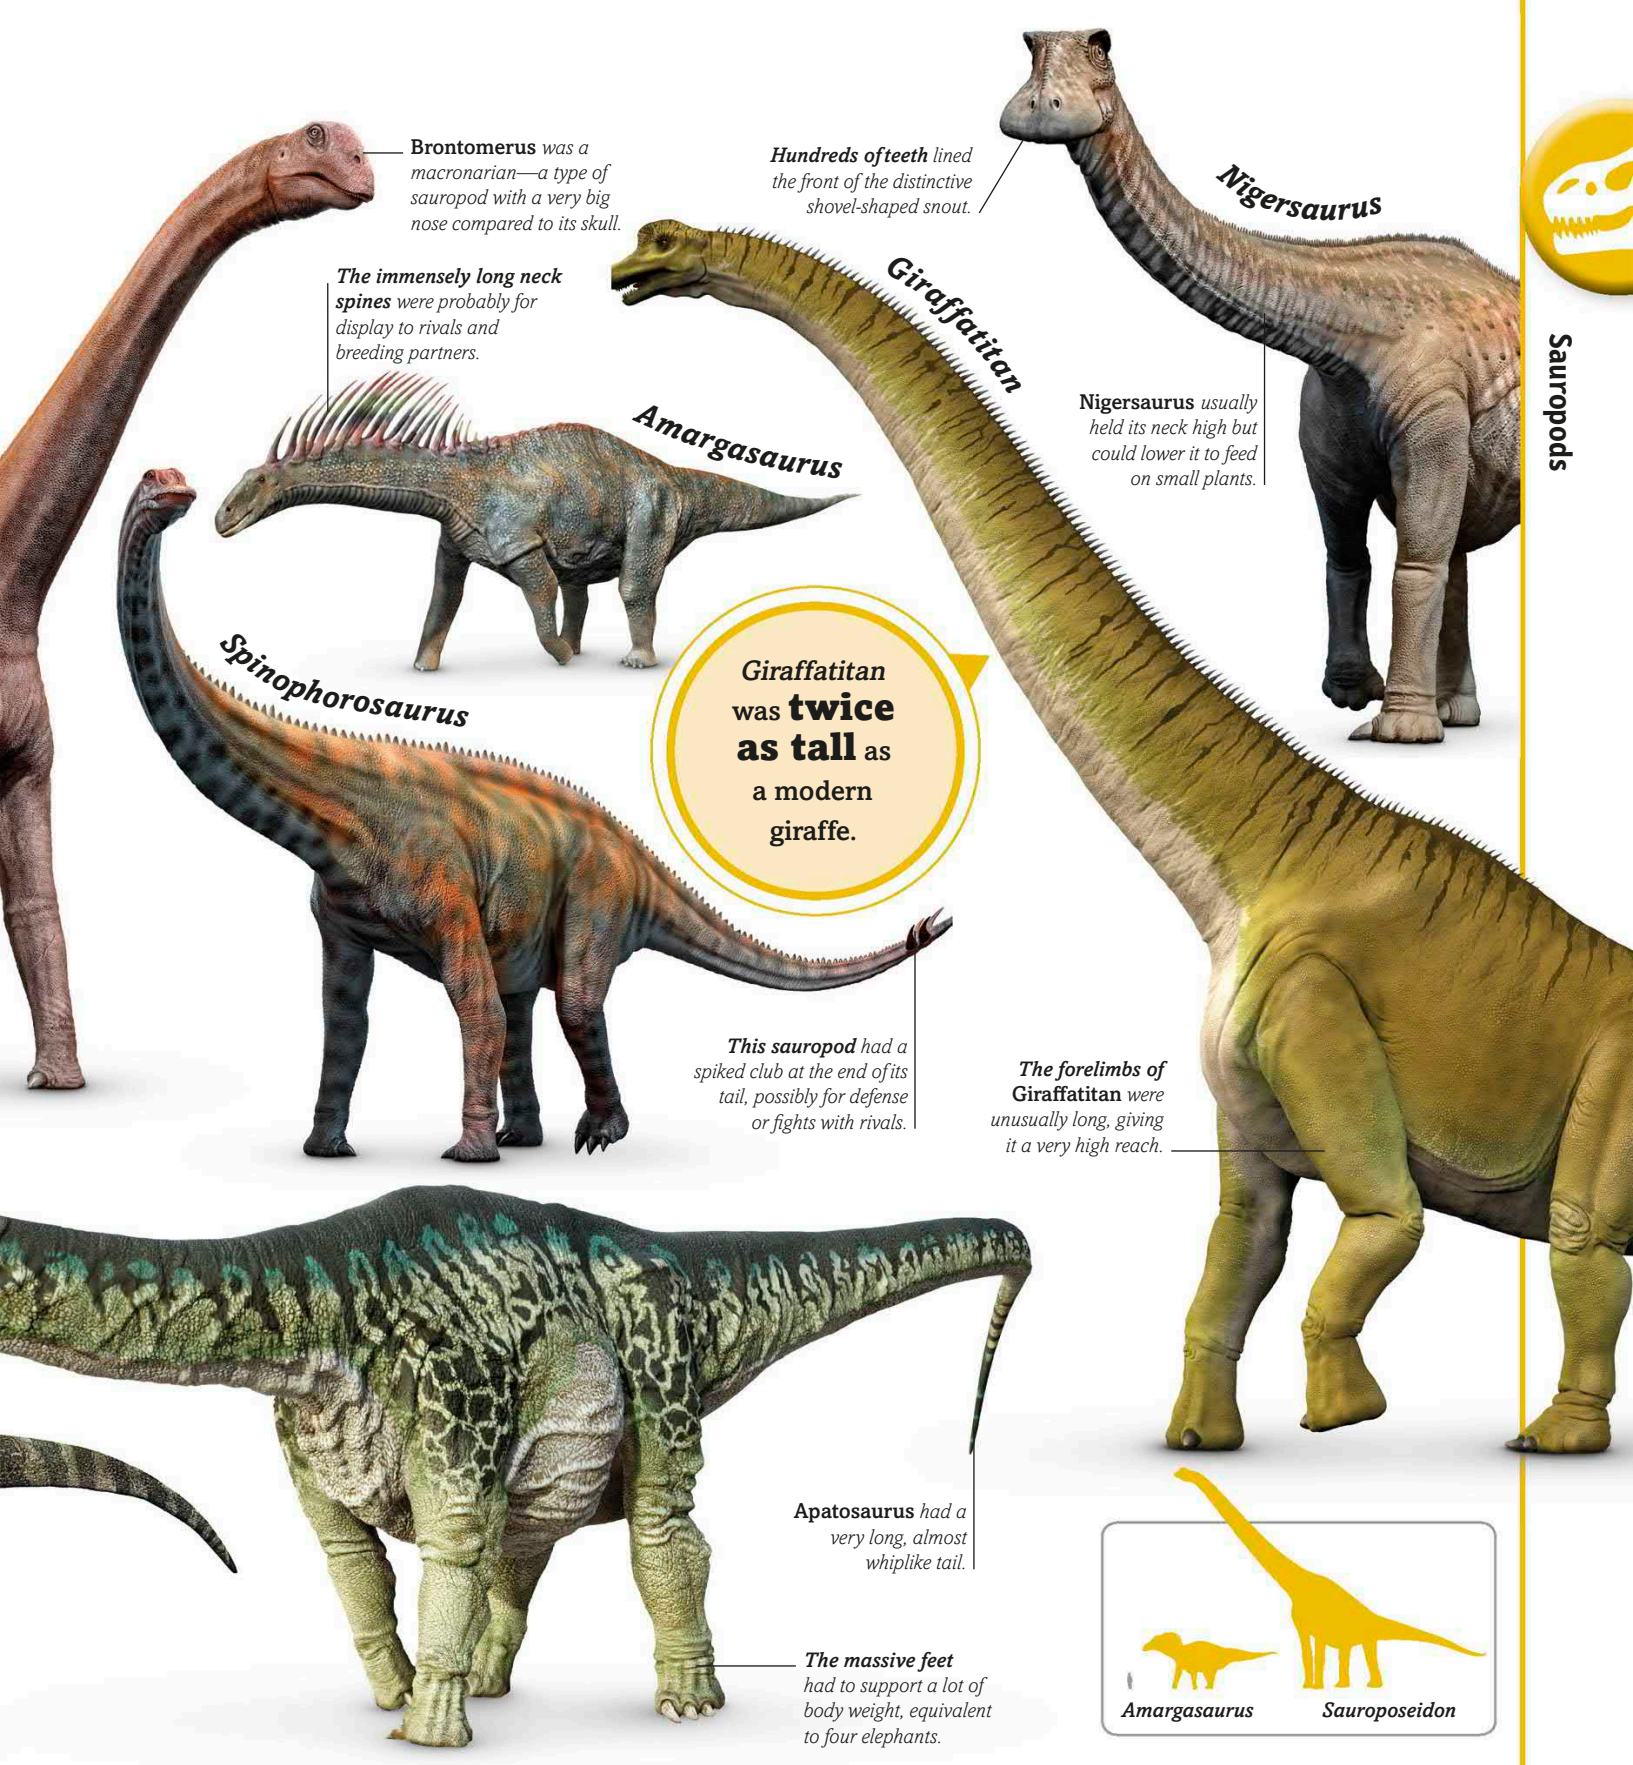

like ***Sauroposeidon*** and ***Giraffatitan***, had long arms that helped raise their shoulders much higher than their hips, allowing them to reach the tallest trees without rearing up. The simple teeth of typical sauropods were adapted for biting or ripping leaves from trees, but not for chewing. They swallowed the leaves and relied on their huge digestive systems to process them. A few sauropods like ***Nigersaurus*** had more complex teeth at the front of their wide snouts. These teeth may have been specialized for eating plants growing at ground level.

Mobile necks

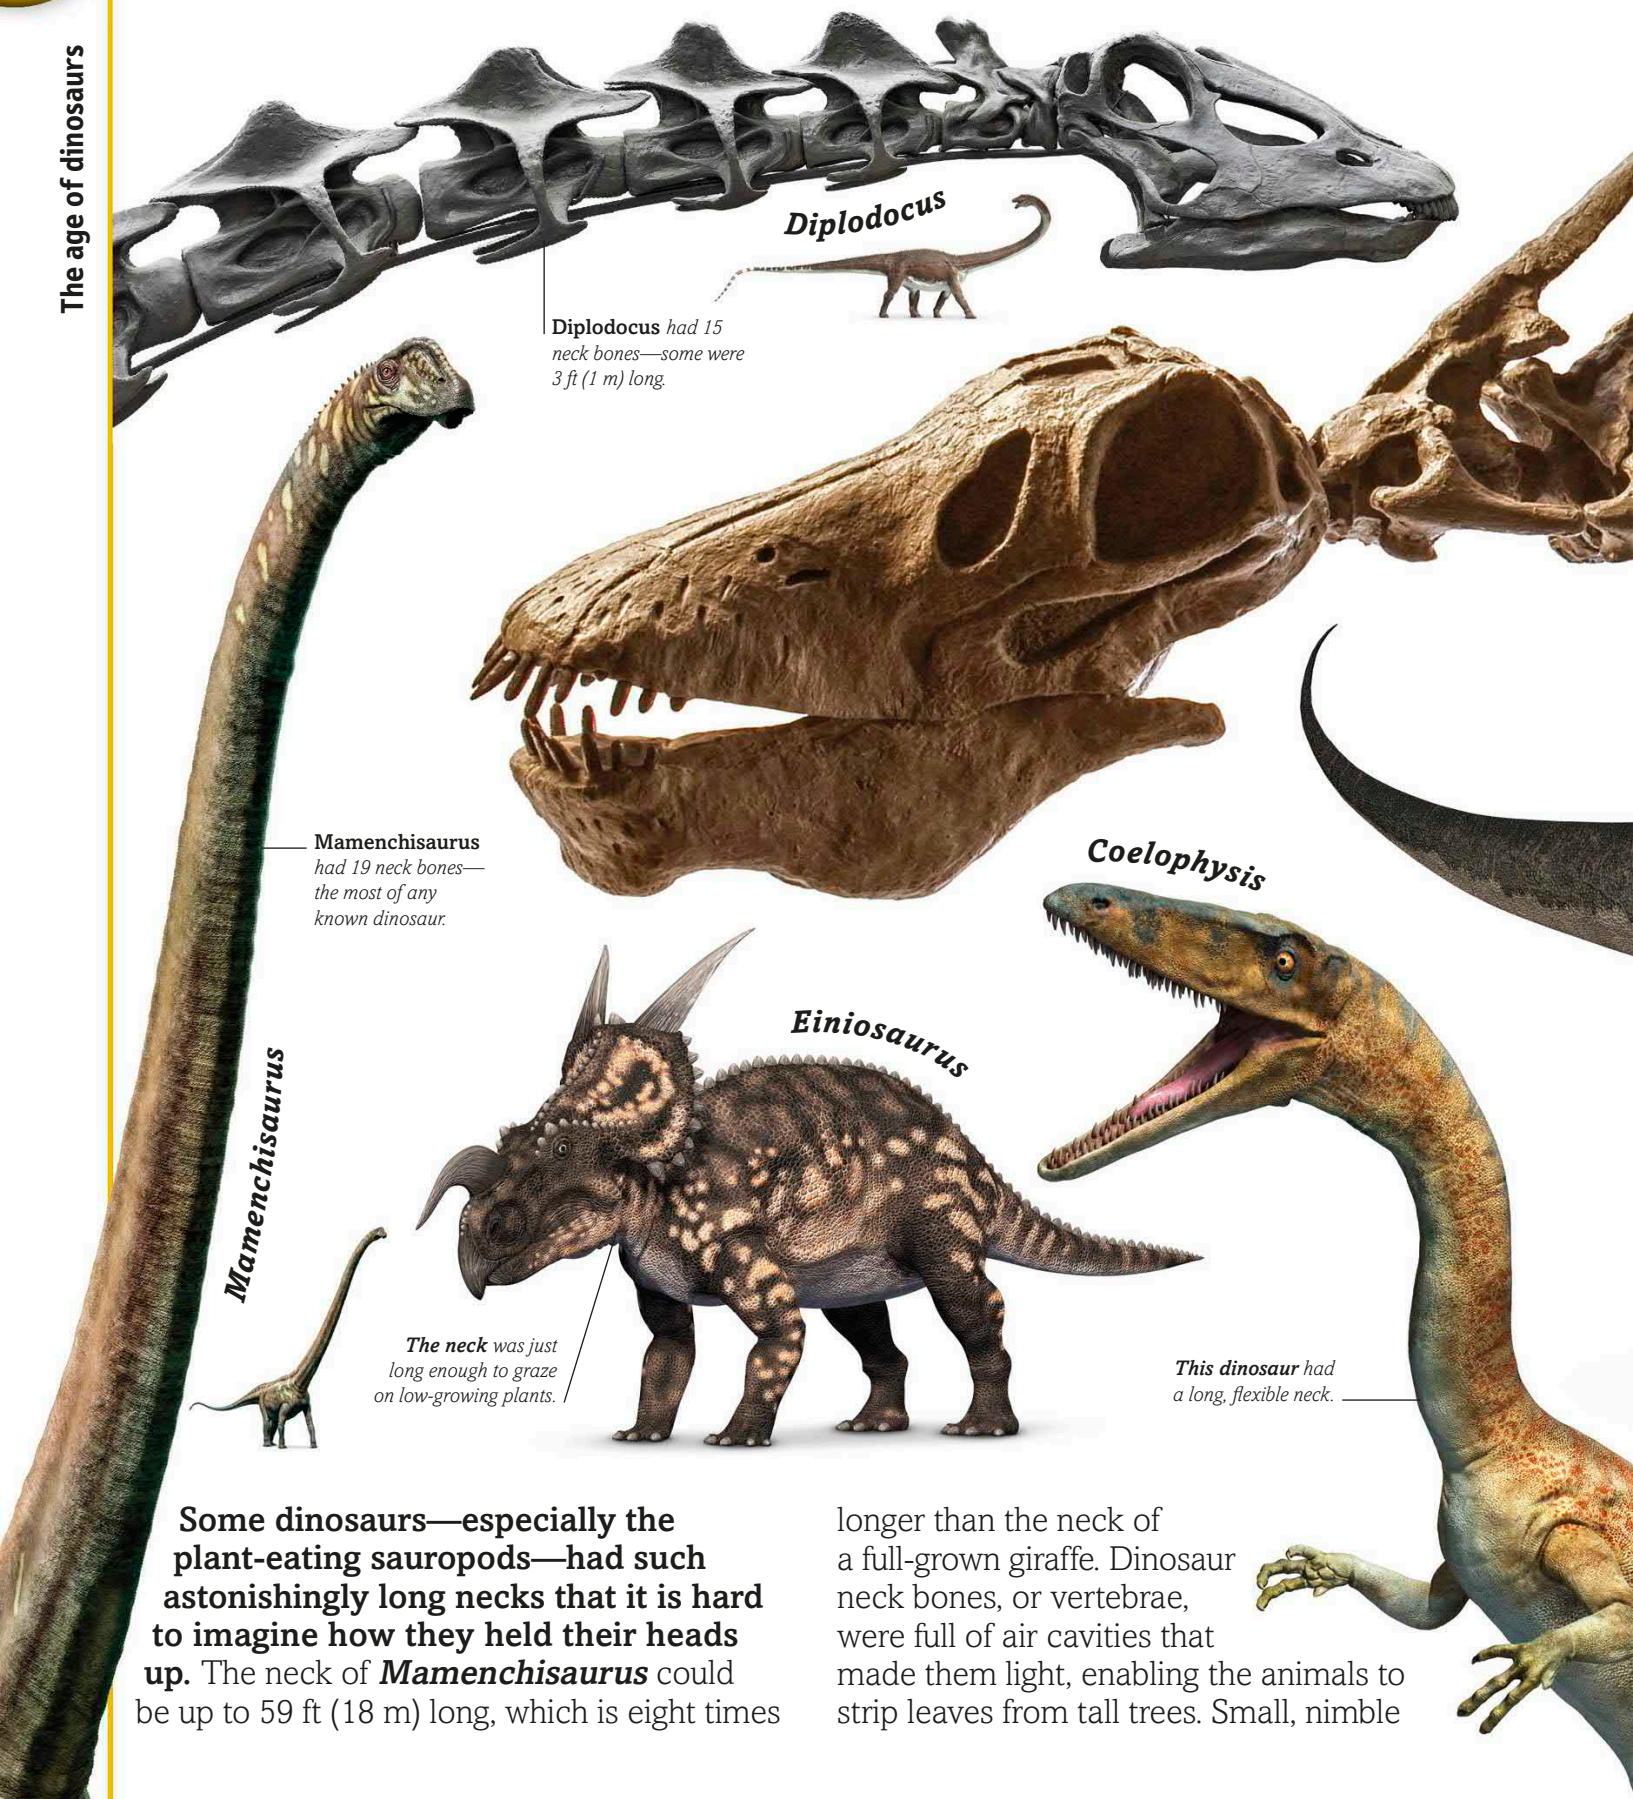

Some dinosaurs—especially the plant-eating sauropods—had such astonishingly long necks that it is hard to imagine how they held their heads up. The neck of ***Mamenchisaurus*** could be up to 59 ft (18 m) long, which is eight times longer than the neck of a full-grown giraffe. Dinosaur neck bones, or vertebrae, were full of air cavities that made them light, enabling the animals to strip leaves from tall trees. Small, nimble

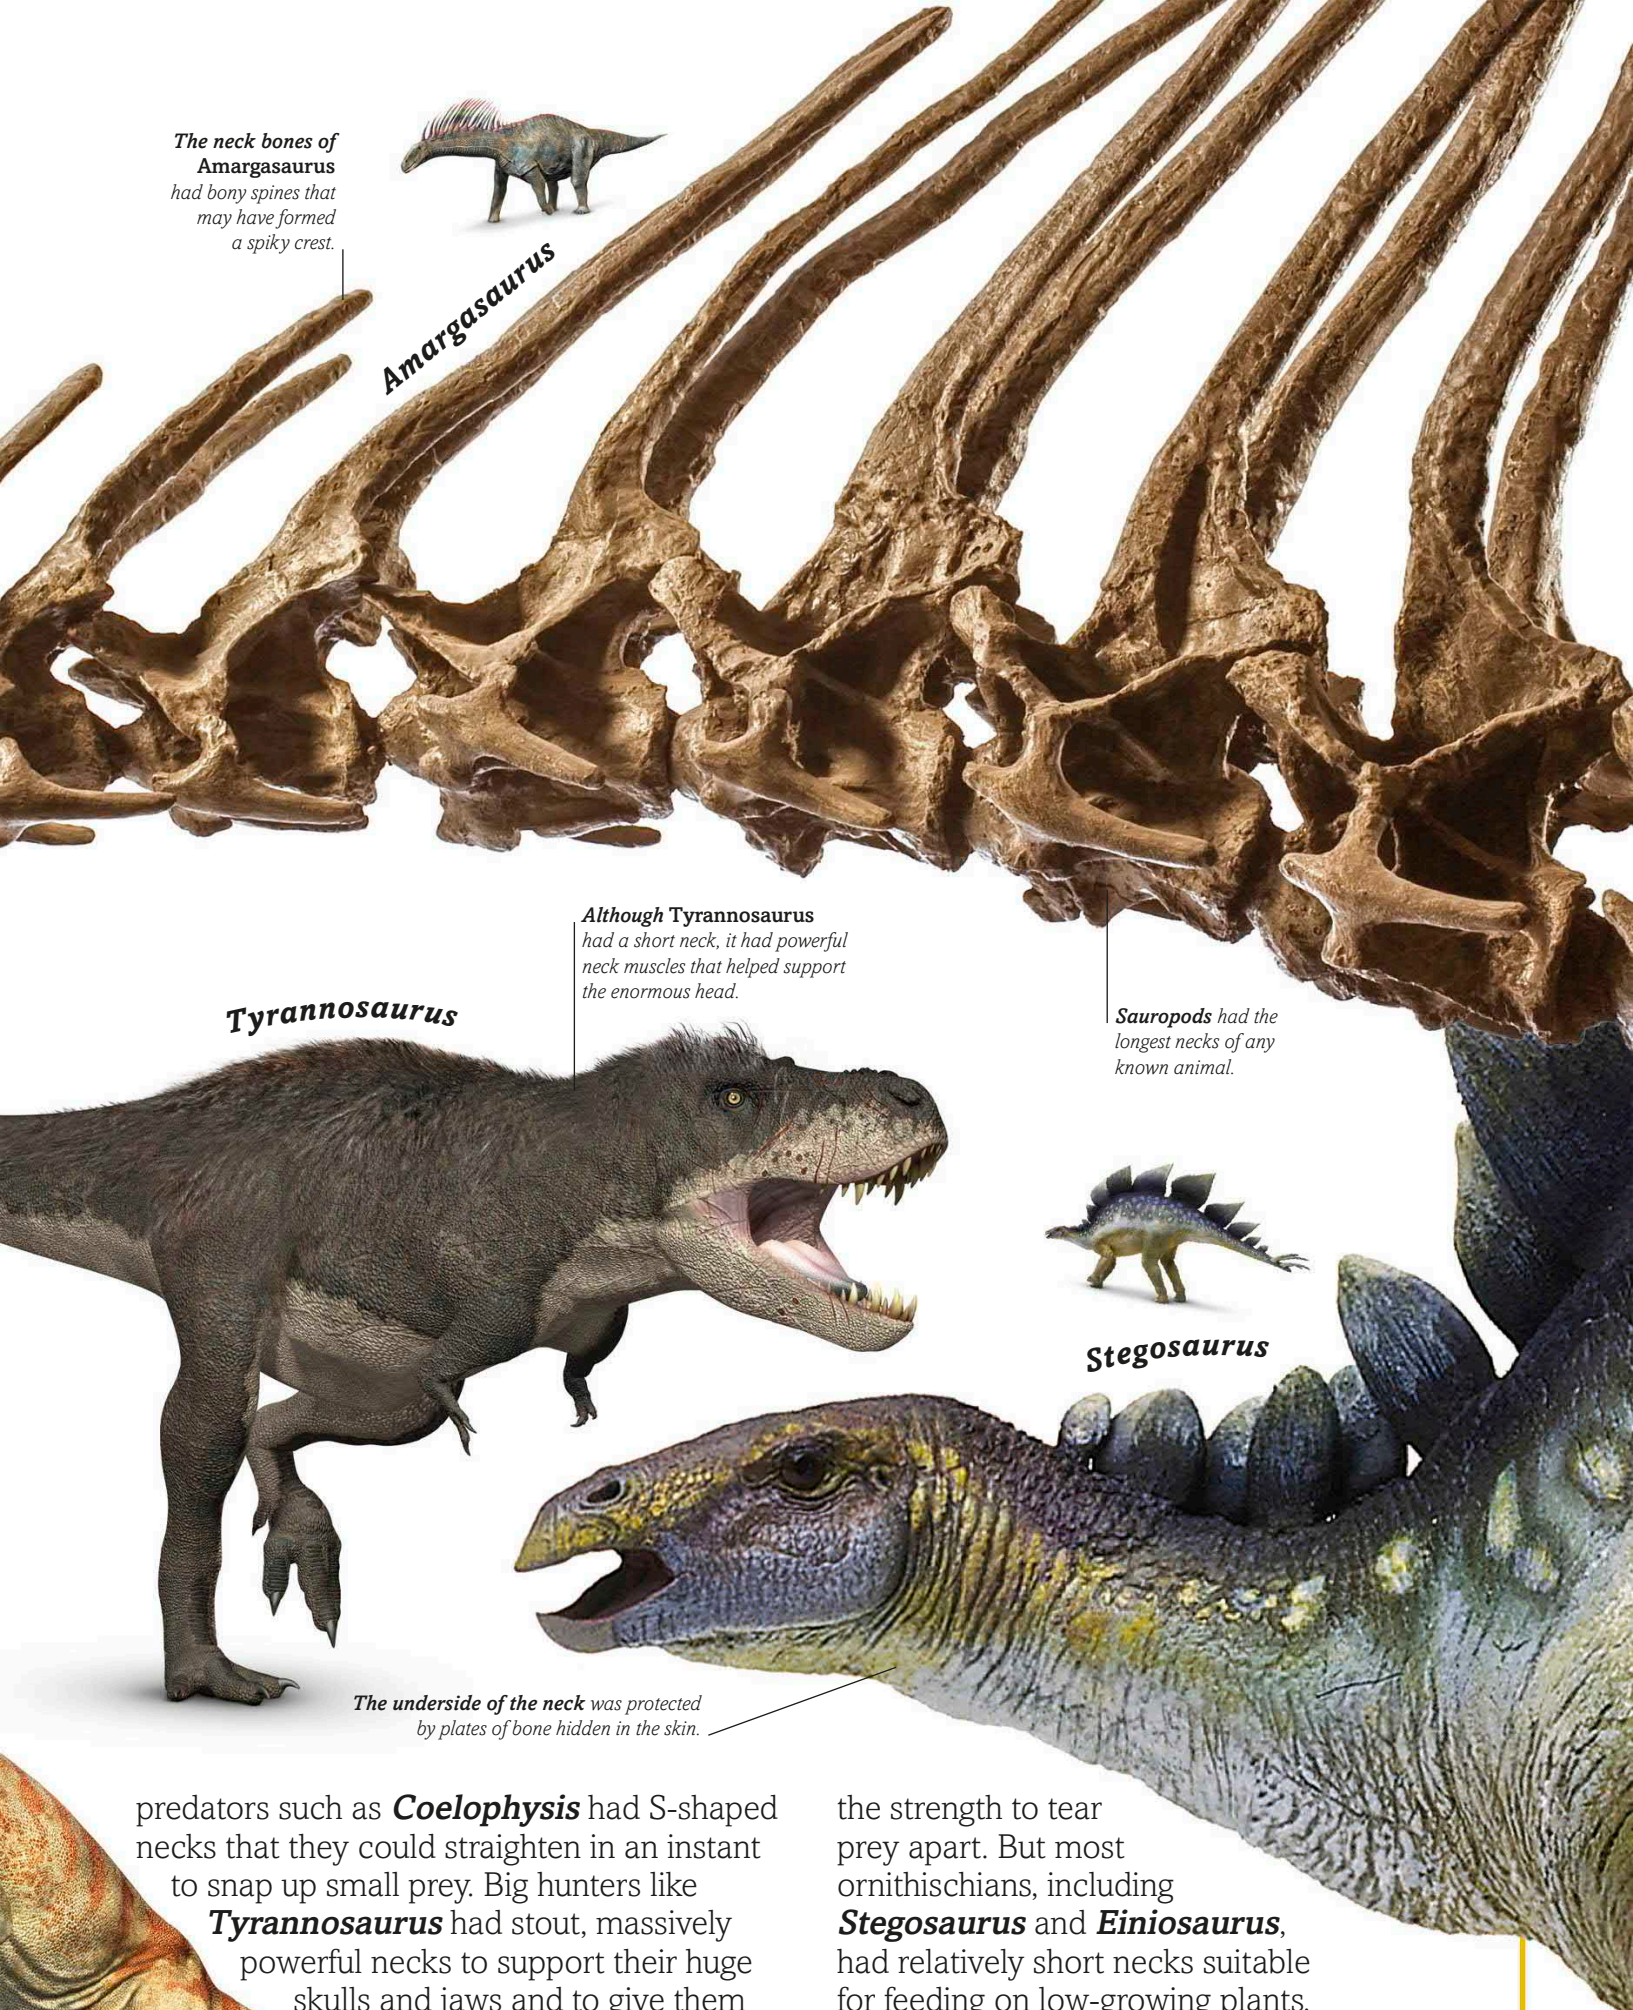

predators such as ***Coelophysis*** had S-shaped necks that they could straighten in an instant to snap up small prey. Big hunters like ***Tyrannosaurus*** had stout, massively powerful necks to support their huge skulls and jaws and to give them the strength to tear prey apart. But most ornithischians, including ***Stegosaurus*** and ***Einiosaurus***, had relatively short necks suitable for feeding on low-growing plants.

Titanosaurs

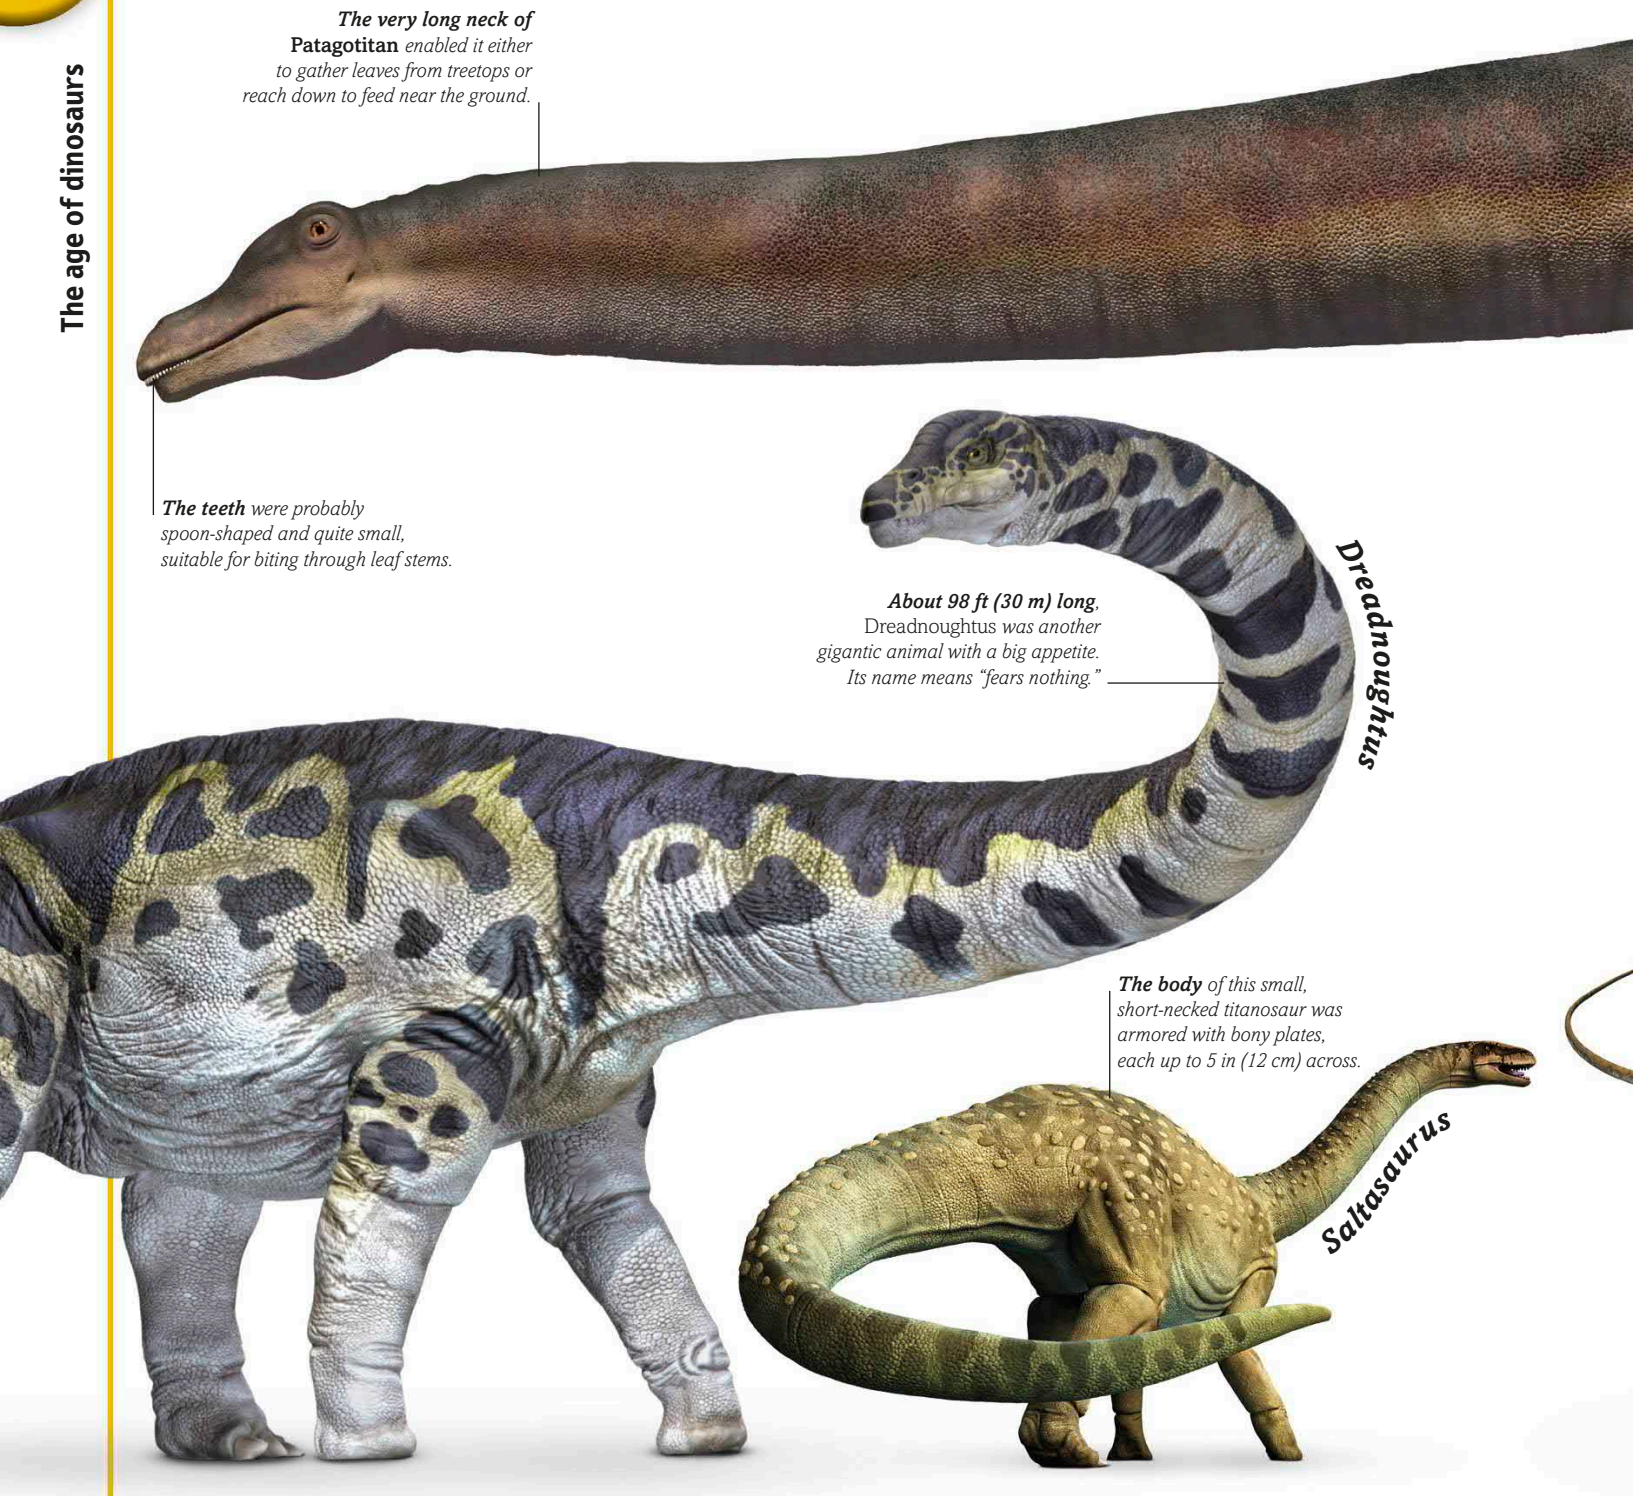

Until quite recently, scientists thought that the giant sauropods had mostly died out by the end of the Jurassic Period, 145 million years ago. But since the 1980s, many sauropod fossils have been discovered showing that they lived on and continued evolving until the very end of the age of dinosaurs. These late sauropods are known as titanosaurs. The name is misleading, because it suggests that they were all titanic giants. They were certainly big, and some of them were colossal—***Patagotitan***, for example, could turn

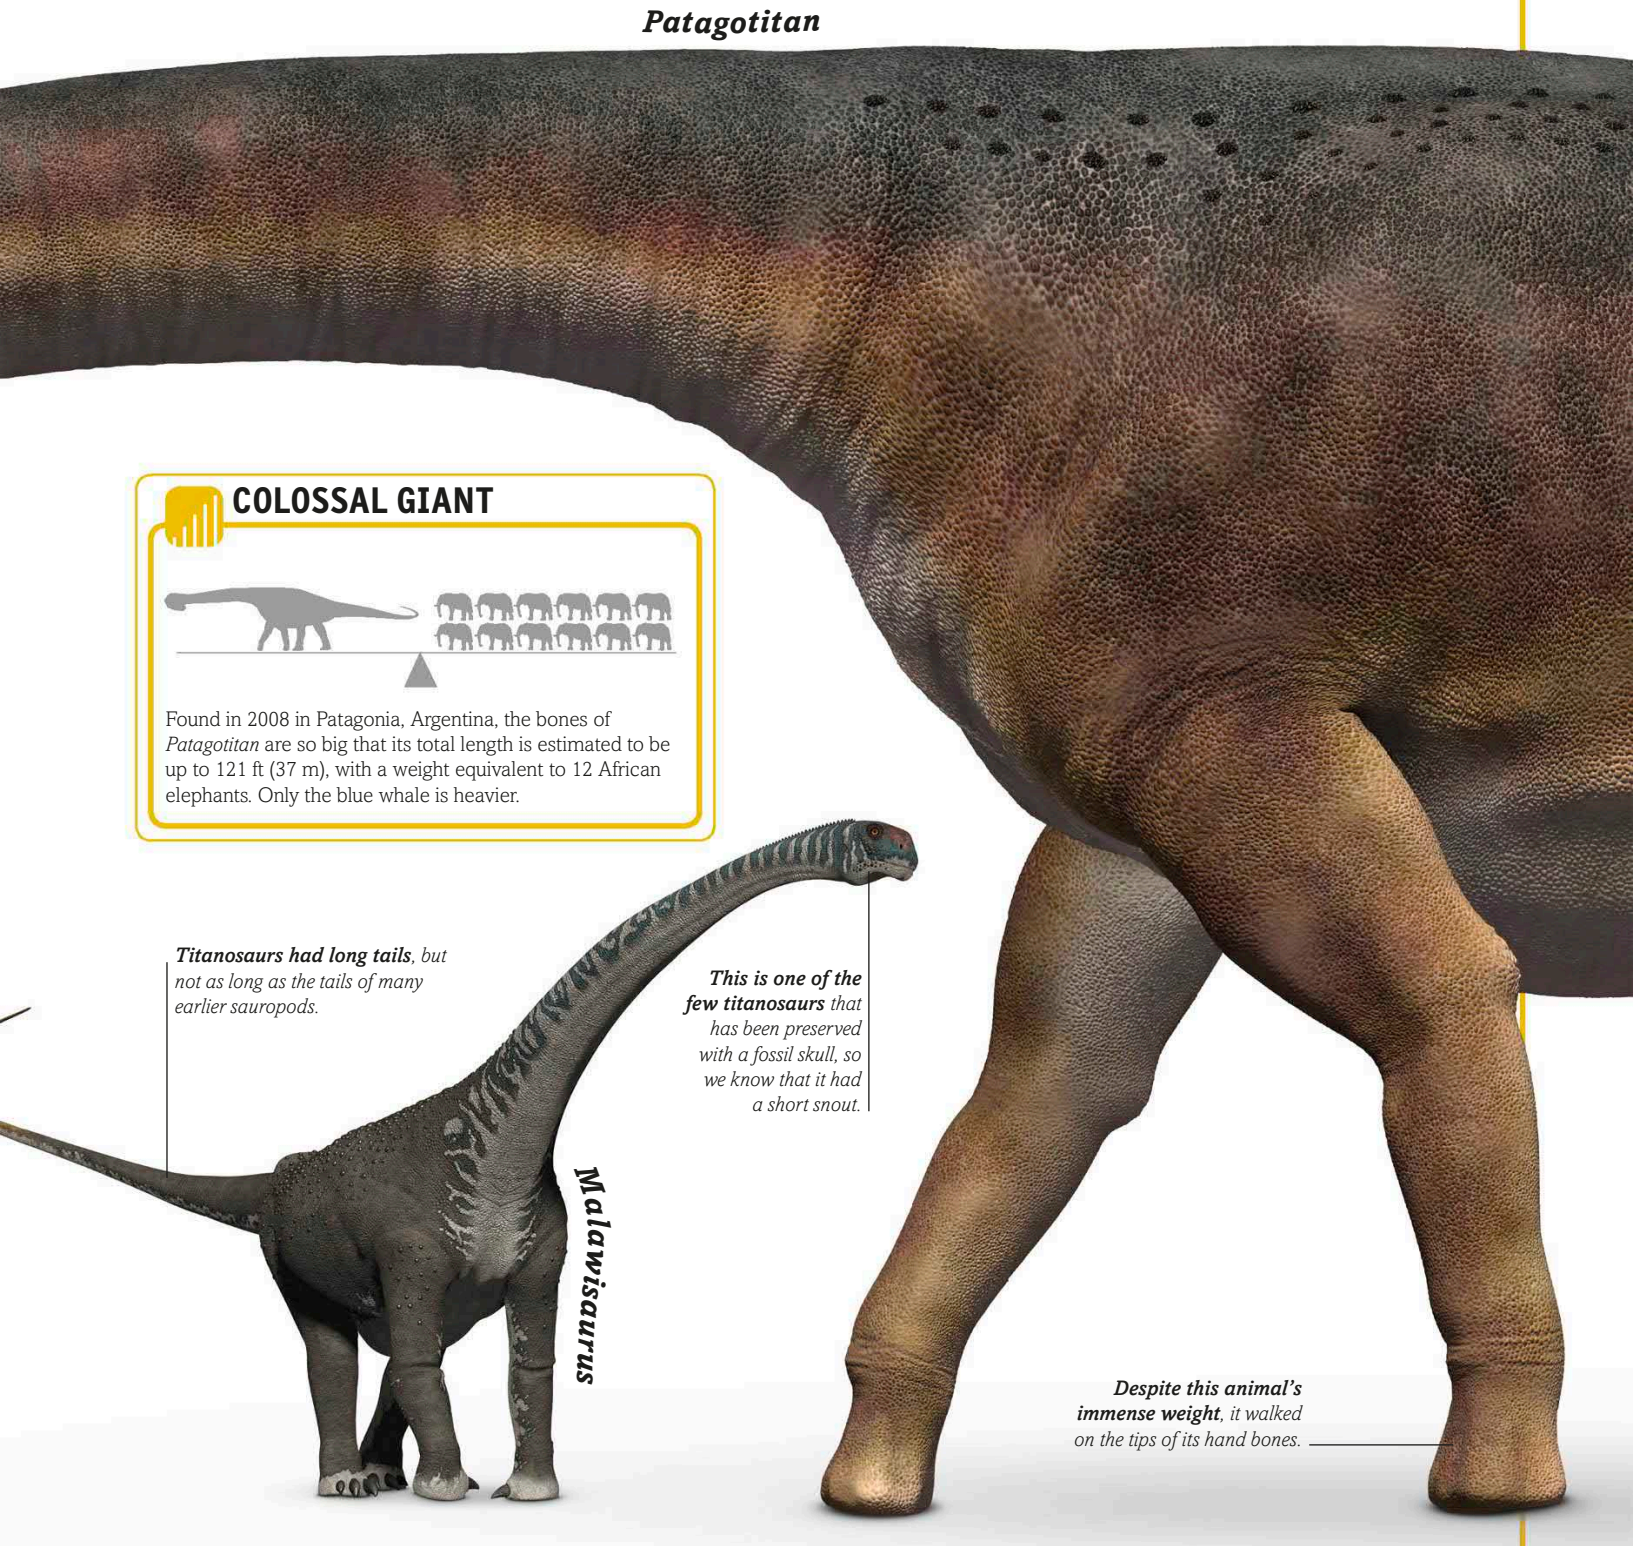

out to be the biggest land animal that ever lived. But other titanosaurs, including ***Saltasaurus*** and ***Malawisaurus***, were no bigger than elephants, which is small by sauropod standards. Over the 80 million years of their existence, the titanosaurs evolved many different head shapes and body forms, suited to a wide variety of feeding habits and lifestyles. Despite this, they were all herbivores, specialized for devouring vast quantities of leaves and other plant material. Fossil evidence also suggests that they probably lived in herds and nested together.

GLOBAL RANGE

Titanosaurs were first discovered in South America but have since been found in Europe, India, Mongolia, China, Africa, and even Antarctica—showing that they were a global success story.

The skin *was probably covered with small scales and occasional bigger ones.*

Patagotitan

The bony osteoderms *embedded in the skin of this animal's back seem to have been a common feature of many titanosaurs, and some were much more heavily armored.*

Ampelosaurus

Most of the weight of **Patagotitan** *was supported by its back feet, which were cushioned with wedge-shaped pads like those of elephants.*

In many ways, titanosaurs were typical sauropods, with long necks, long tails, and bulky bodies supported on all four limbs. In giants like ***Patagotitan*** and ***Puertasaurus***, their length, bulk, and especially weight were close to the maximum possible for a land animal. But they had other, more distinctive features. Their hands were better adapted for bearing weight than those of earlier sauropods, and later titanosaurs like *Saltasaurus* and ***Nemegtosaurus*** had no finger bones; they stood on pillarlike structures made up of the

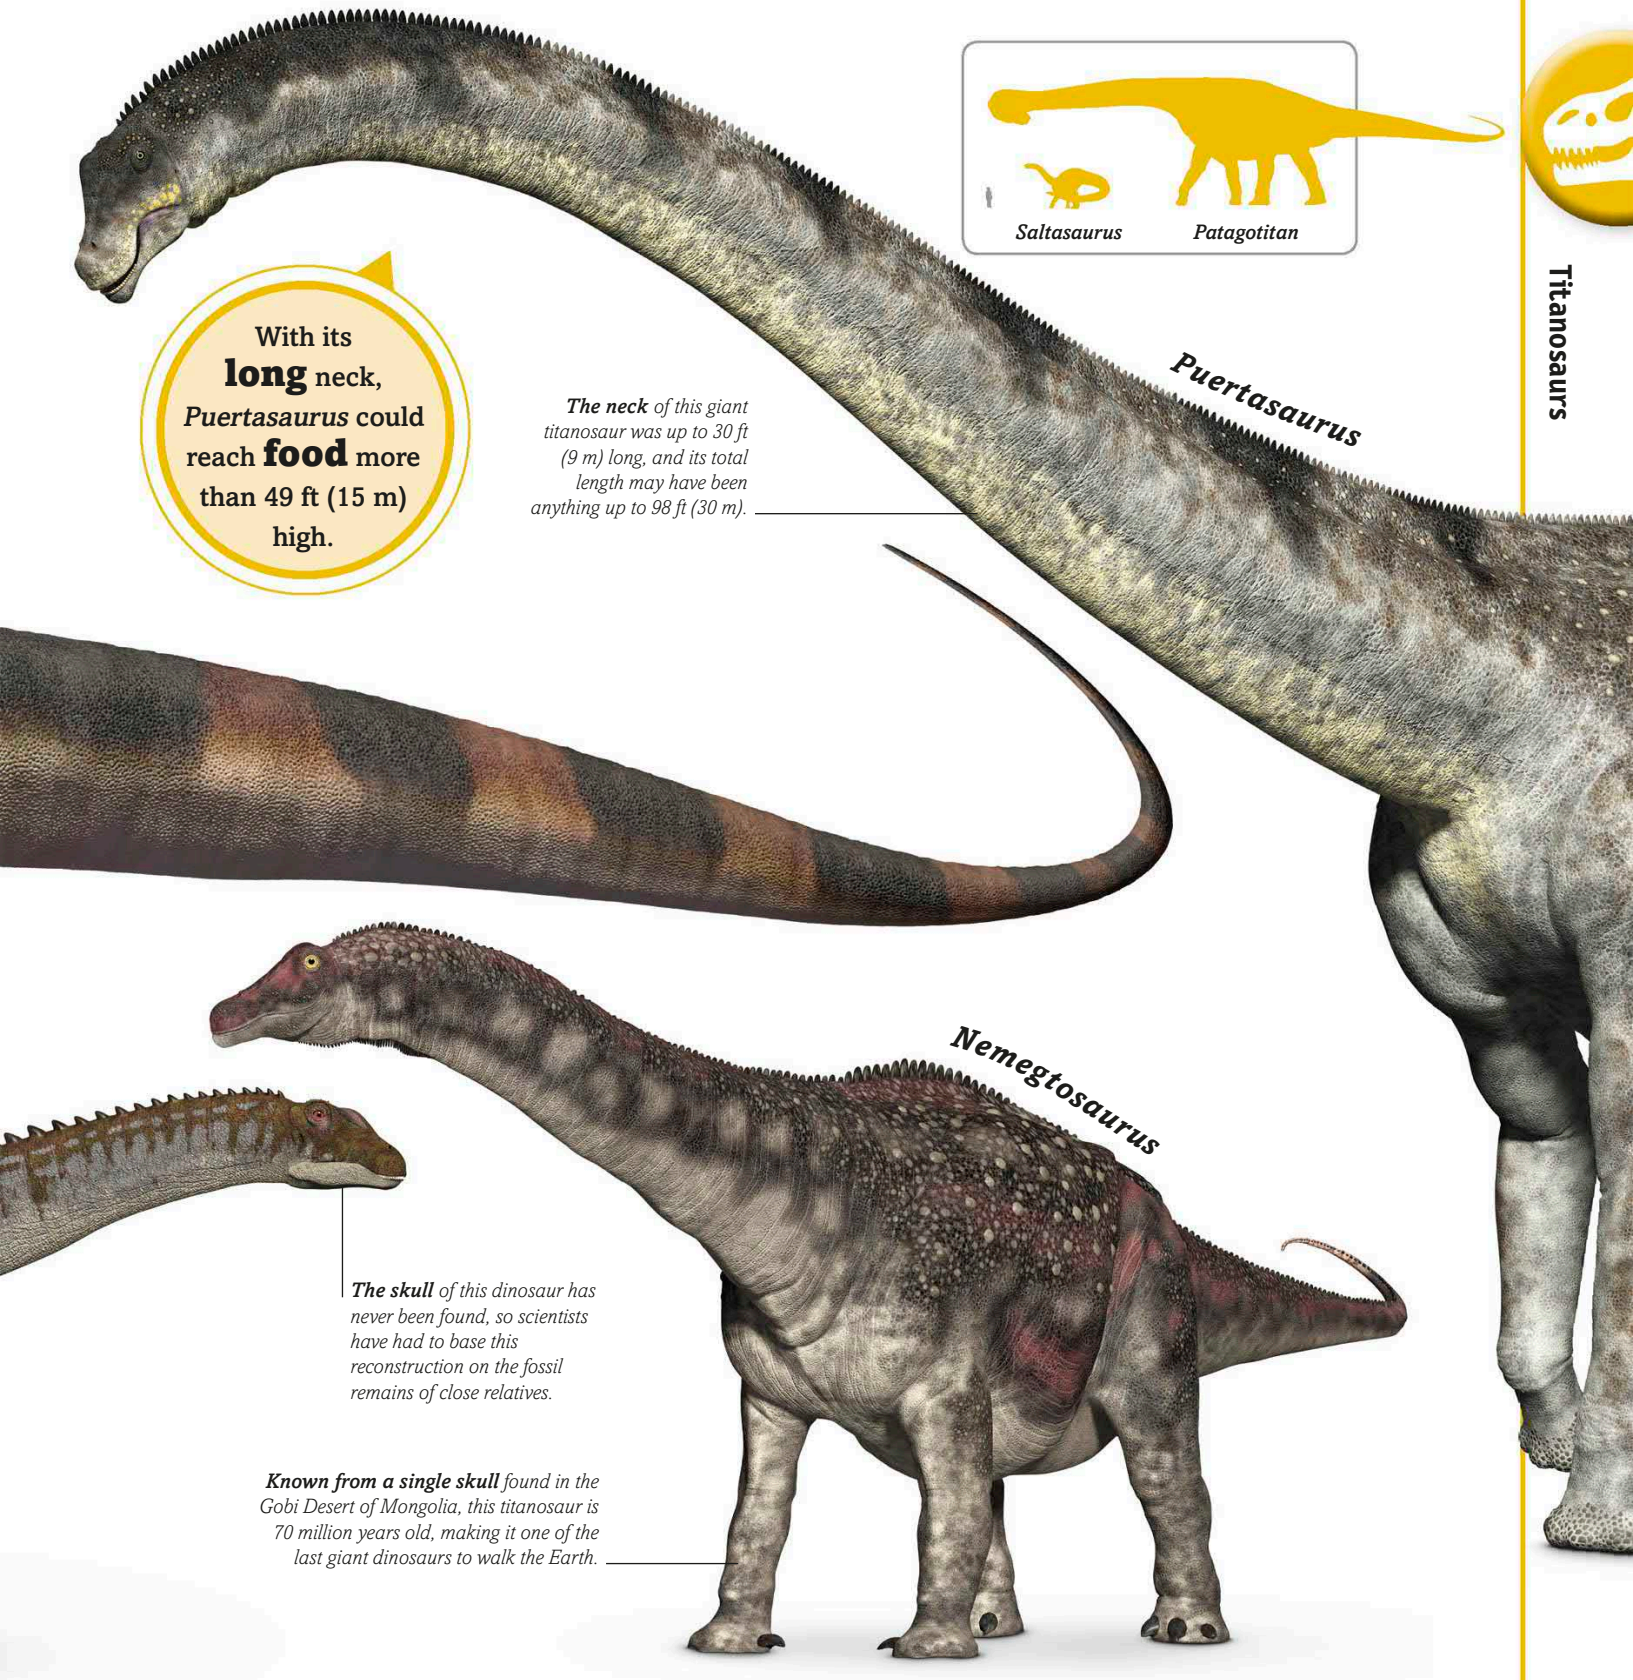

same bones that form the palms of our hands. Titanosaurs had unusually broad chests, and this meant that their forelimbs were spaced wide apart; trackways of fossilized titanosaur footprints are easy to recognize because the marks left by their feet are so widely spaced.

Many titanosaurs also had a feature not seen in earlier sauropods—body armor. The skin of ***Ampelosaurus***, for example, was studded with tough, bony plates and spikes called osteoderms, which would have helped protect it from the teeth of big predators.

Footprints and trackways

Found in Mongolia, **giant** footprints up to **6½ ft** (2 m) wide were made by titanosaurs.

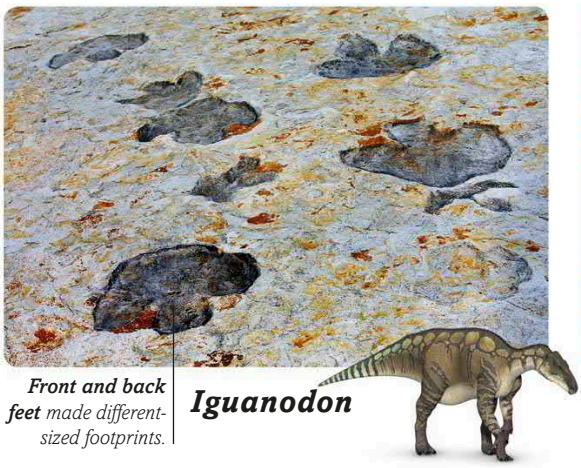

Front and back ***feet*** *made different-sized footprints.*

Iguanodon

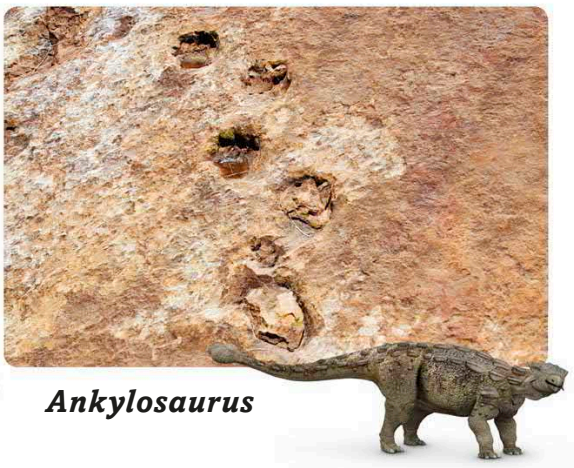

Ankylosaurus

Fossilized bones can tell us a lot about how the dinosaurs were built, but less about how they lived. Fossilized footprints, however, can show how dinosaurs walked and ran and whether they lived alone or in a group. A single footprint does not tell us much more than what type of animal made it; the most interesting information comes from trackways—sets of footprints left by animals on the move. The angle and spacing of the prints show how they placed their feet. The spacing also reveals the stride length, and if this varies, it indicates

STRIDE LENGTH

If we know how long a dinosaur's legs were, the length of its stride indicated by a line of footprints can show how fast it was moving. It may also show it speeding up or slowing down.

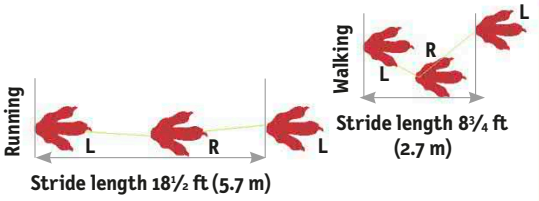



Titanosaur

Apatosaurus

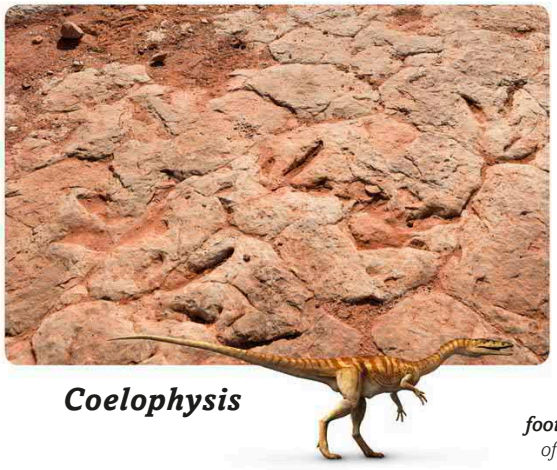

Coelophysis

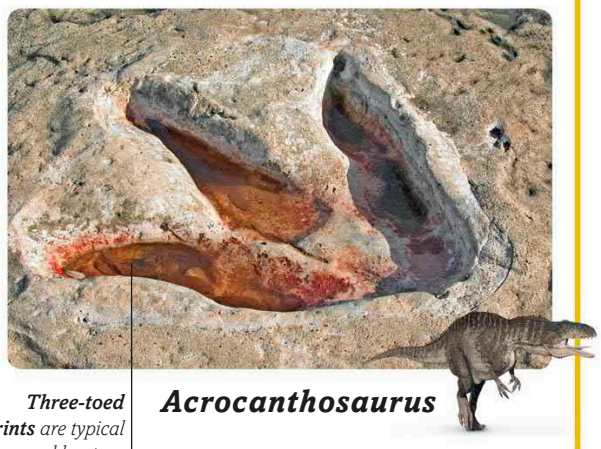

*Three-toed **footprints** are typical of theropod hunters.*

Acrocanthosaurus

a change of speed. Small and large footprints found together might have been left by a family, while a complex pattern of overlapping footprints could be evidence of a whole herd on the move. One 113-million-year-old trackway in Texas can even be read like a story, since it seems to show a big sauropod being stalked by a hunter—possibly the powerful theropod ***Acrocanthosaurus***. At one point, the footprints converge, perhaps revealing the exact spot where the predator made its attack.

Stegosaurs

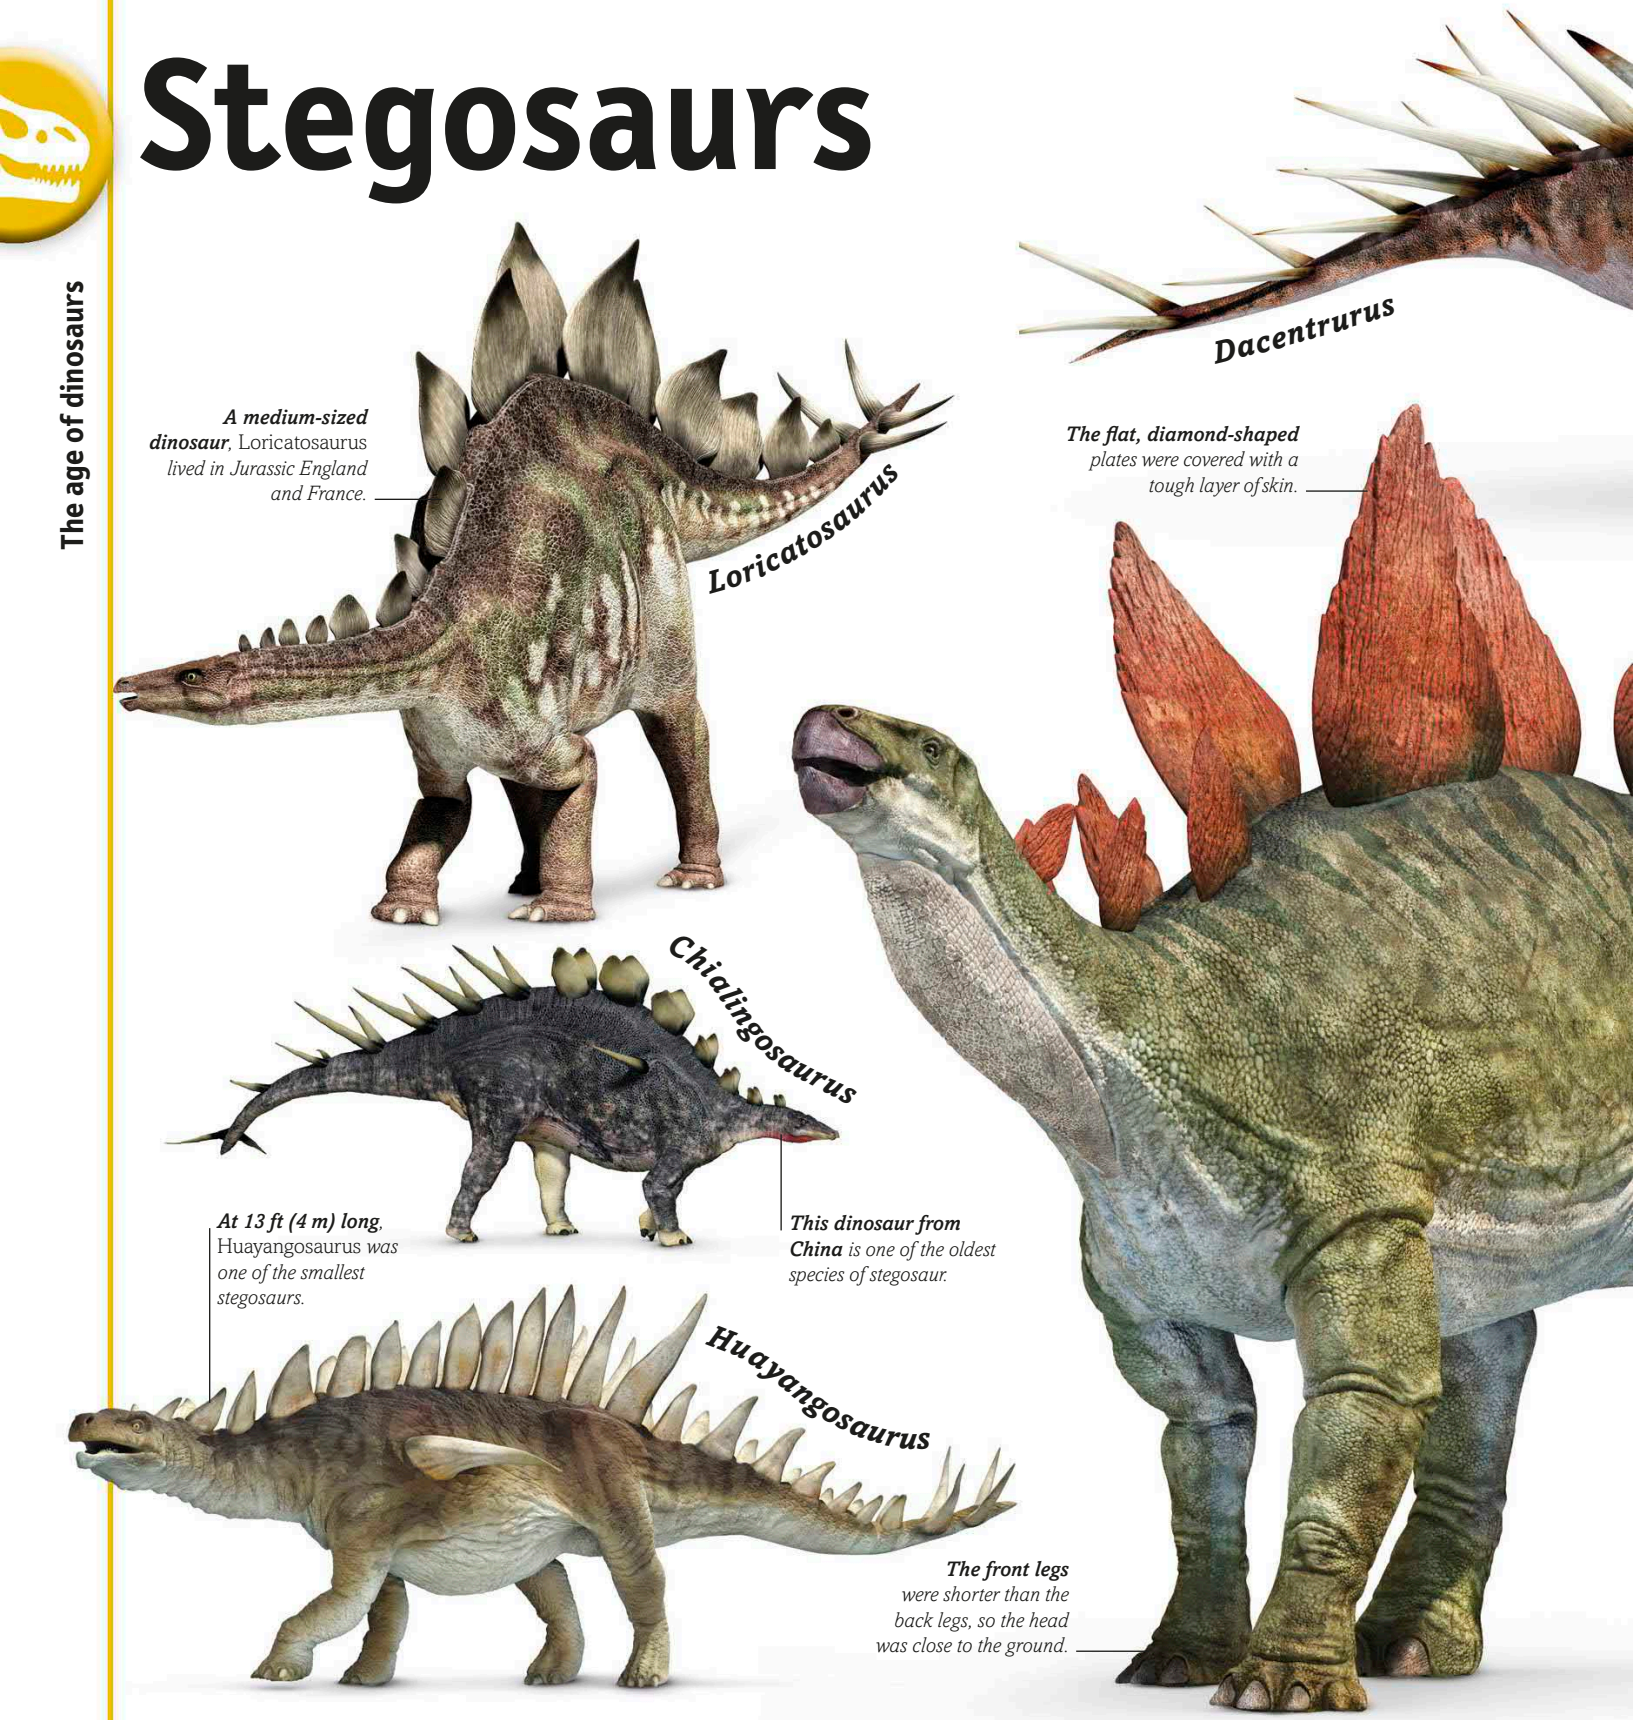

With a double row of tall, pointed, bony plates running down its back and tail, *Stegosaurus* is one of the most instantly recognizable dinosaurs. But it was just one of many similar stegosaurs that lived during the Jurassic and early Cretaceous Periods in various parts of the world—the US, Europe, India, China, and southern Africa. All stegosaurs were covered with plates and spikes along their backs, and many, such as the extra-spiky ***Dacentrurus*** and ***Kentrosaurus***, also had spikes sprouting from their shoulders. These may have been used

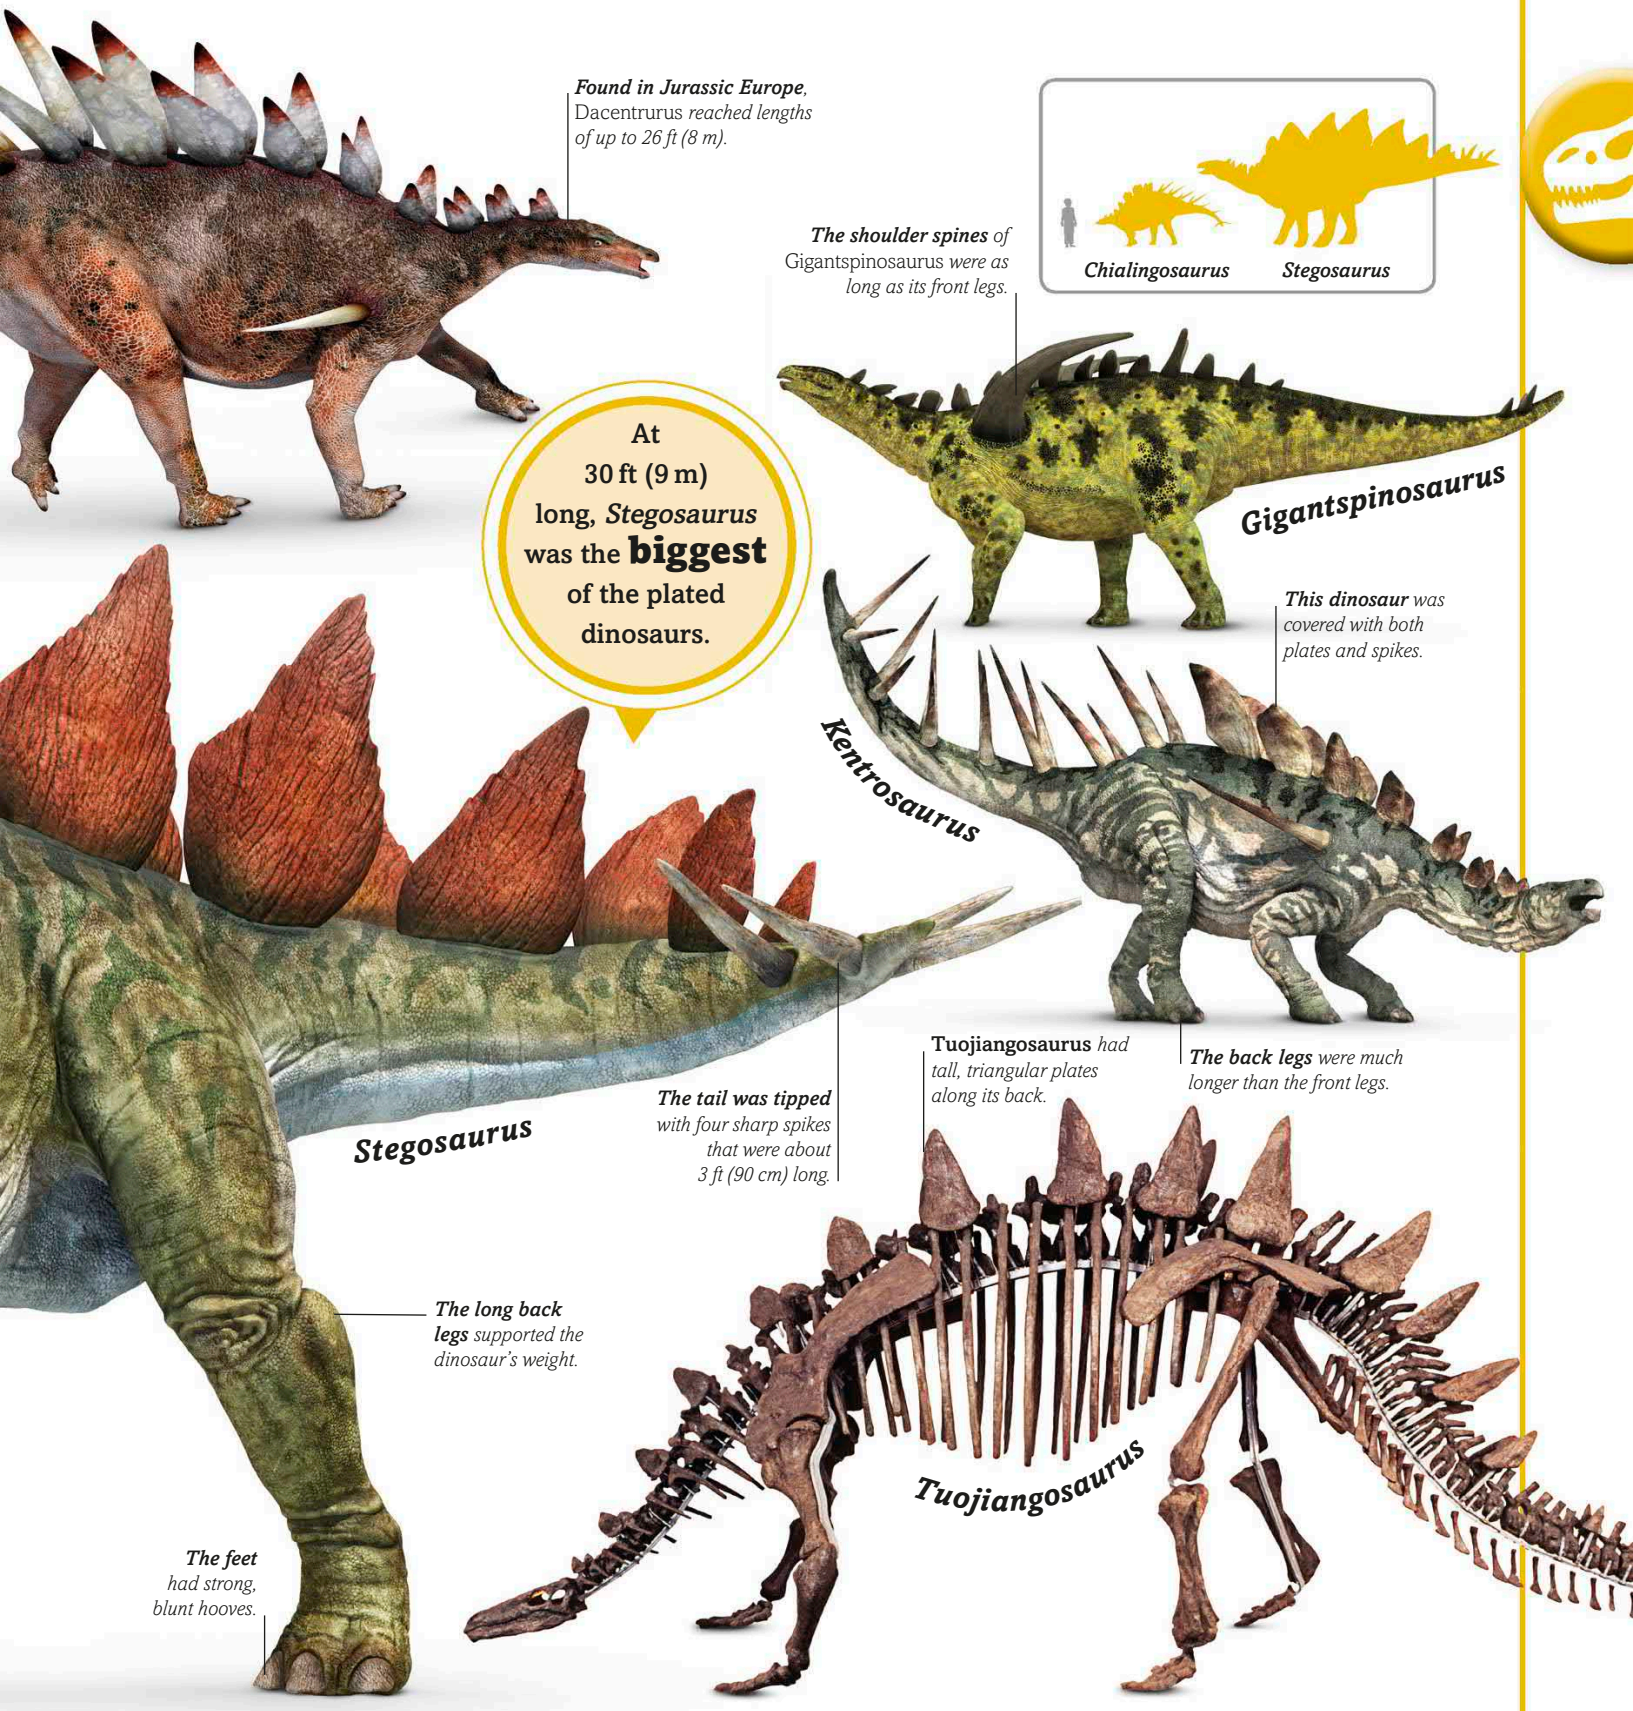

for defense, while the spikes on the end of a stegosaur's tail would certainly have been used to lash out at a predator. But the spectacular plates may have been brightly colored to attract a mate. All stegosaurs were plant-eaters, with narrow, beaked mouths that were ideal for gathering the most nourishing parts of low-growing shrubs and other plants. In relation to their size, they also had the smallest brain of any dinosaur—the elephant-sized *Stegosaurus* had a brain that was no bigger than a dog's.

About tails

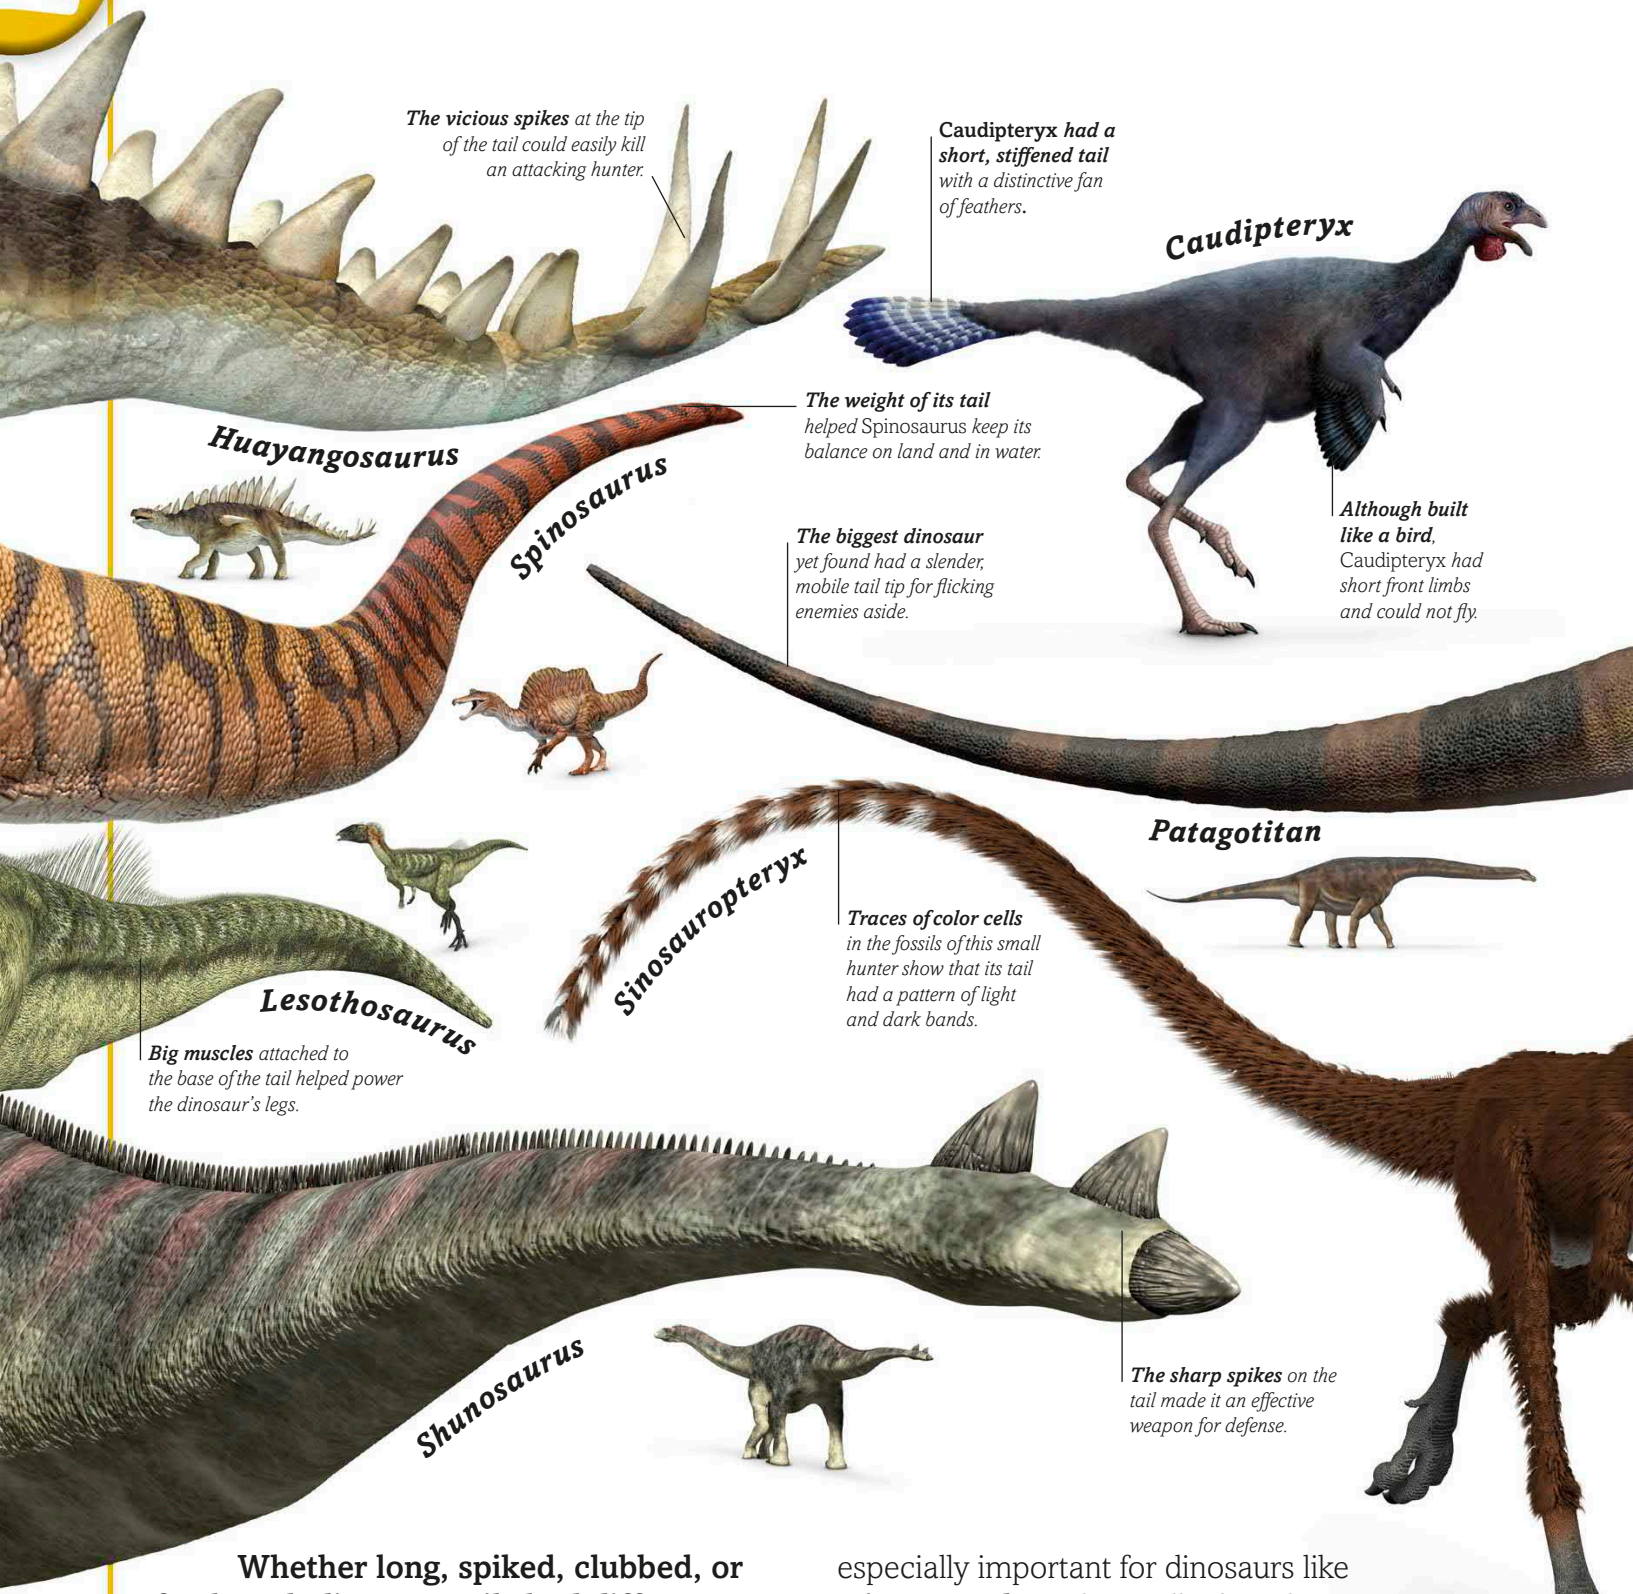

Whether long, spiked, clubbed, or feathered, dinosaur tails had different uses. Most of the big dinosaurs had long, bony tails equipped with powerful muscles. These heavy tails helped to balance the weight of the dinosaur's head and upper body. This was especially important for dinosaurs like ***Xiongguanlong*** that walked on their hind legs. The giant sauropod ***Patagotitan***, however, could sweep its long tail sideways like a whip with enough speed and force to knock a predator off its

FEATHERED EVIDENCE

Most of our knowledge of dinosaurs comes from their bones. But this lump of ancient amber (hardened tree resin) contains the entire tail of a small theropod dinosaur, complete with muscles and brown feathers.

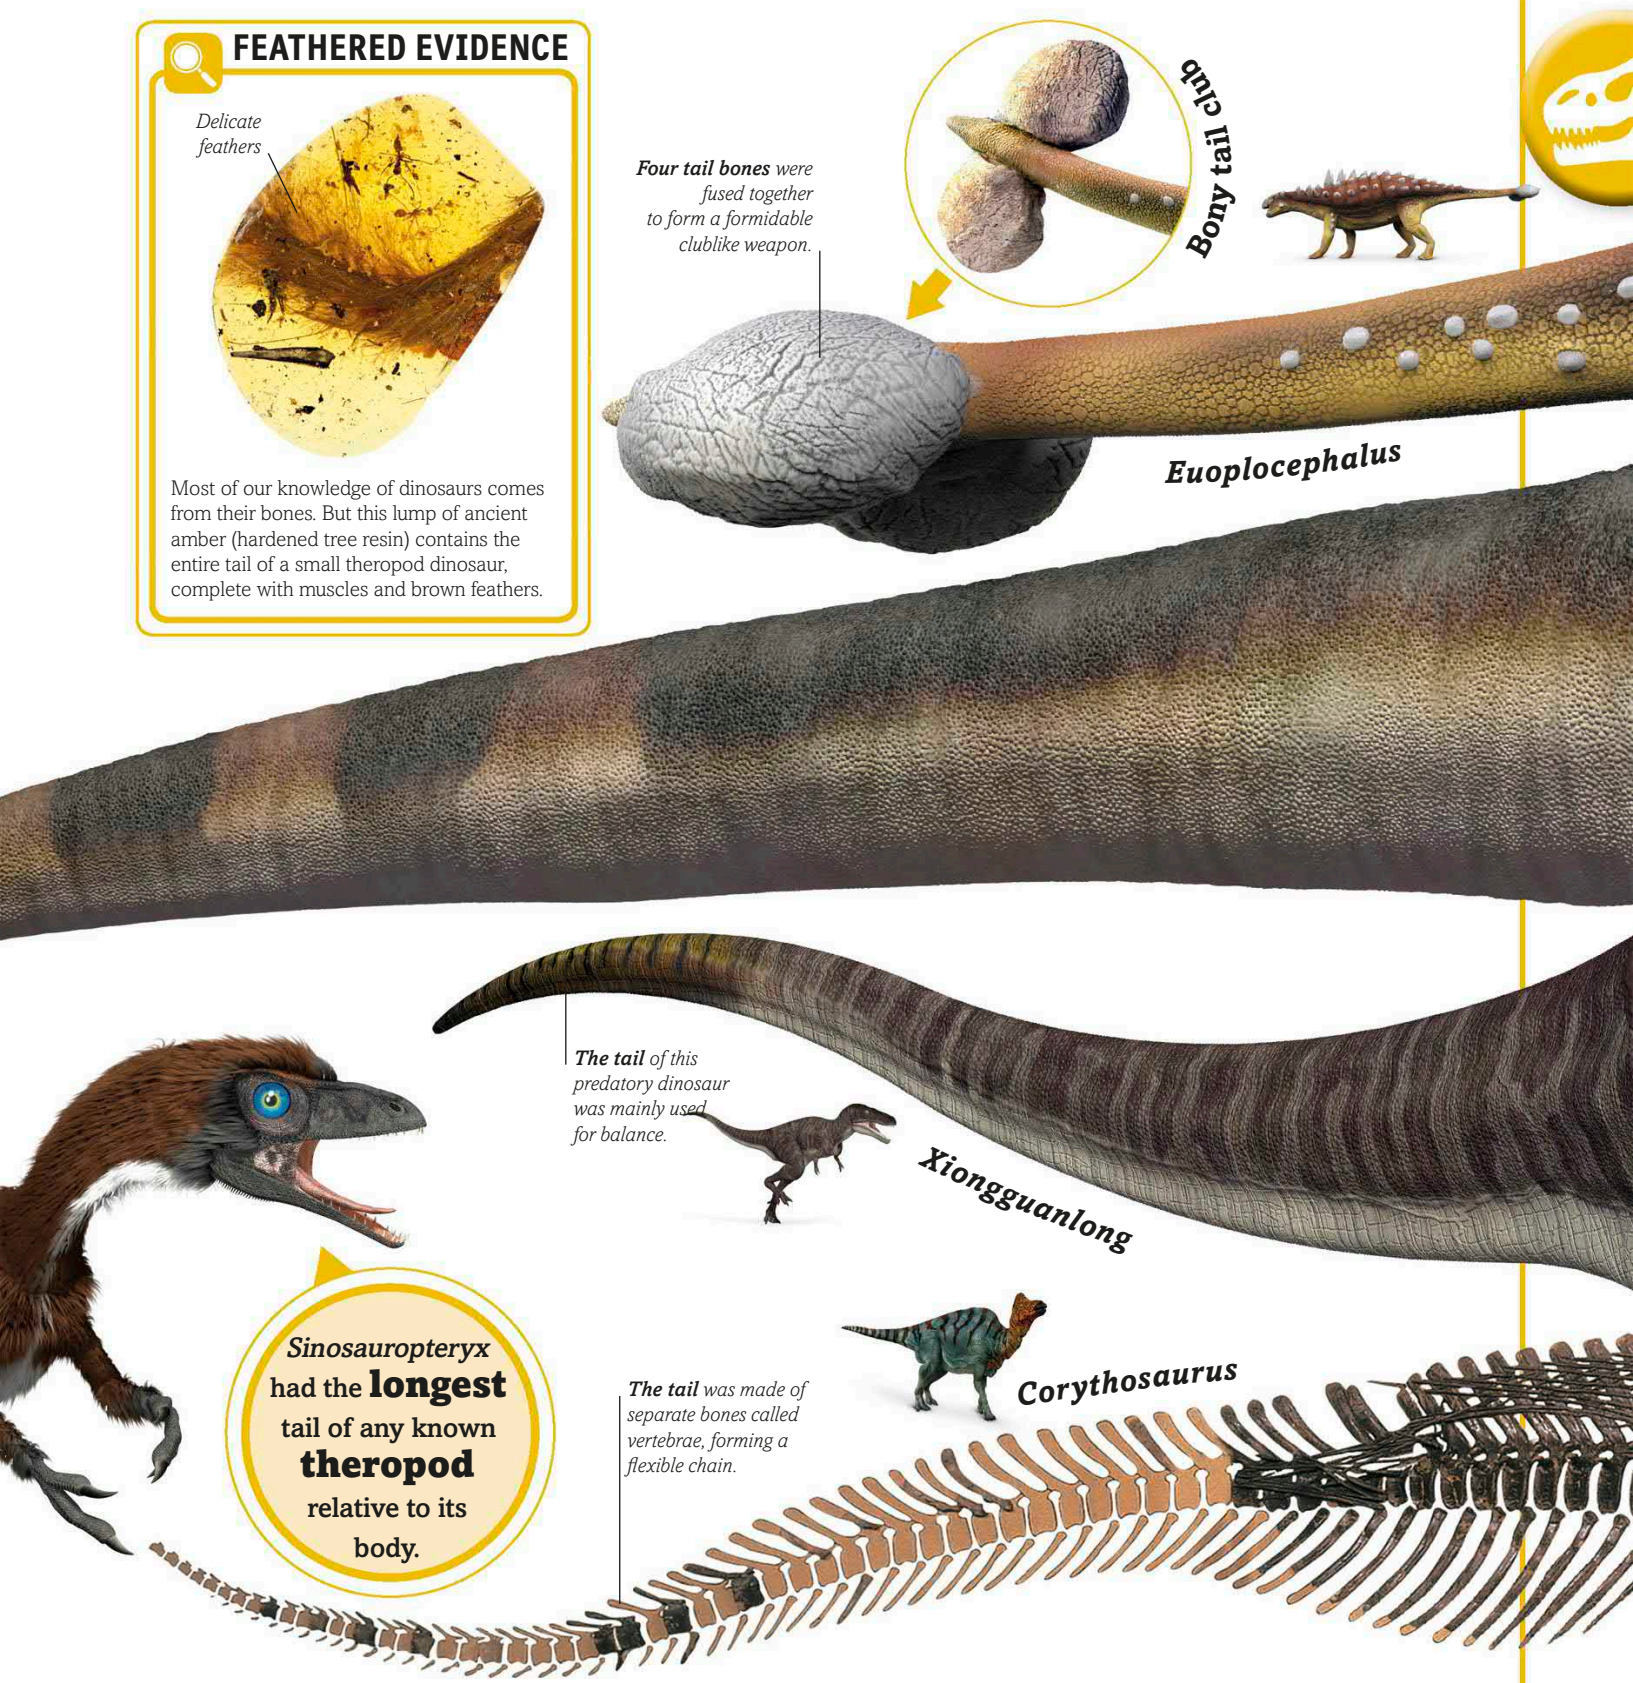

feet. The tail of ***Huayangosaurus*** was armed with two pairs of sharp spikes at the tip that made it a formidable weapon; the midsized sauropod ***Shunosaurus*** had a similar adaptation. Some ankylosaurs like ***Euoplocephalus*** had a massive, bony tail club that could be slammed into an enemy like a sledgehammer, shattering its bones. Some small theropod dinosaurs like ***Caudipteryx*** had short, bony tails with long feathers, just like modern birds. They may have been used for balance or to attract a mate.

DEADLY SPIKES For a hungry predator like *Ceratosaurus*, which lived in North America and Europe about 155 million years ago, a big, slow-moving stegosaur like *Dacentrurus* would have made a tempting target. The tall spikes on the stegosaur's back and tail certainly looked imposing, but could they cause any harm? Moving in to launch its attack, *Ceratosaurus* would soon find out—the hard way.

A hole in the tail bone belonging to another Jurassic predator, *Allosaurus*, was found to be a perfect match with a *Stegosaurus* tail spike. It is likely that the stegosaur was defending itself from an attack by swinging its tail like a spiked club. *Dacentrurus* was equipped in exactly the same way, with two pairs of stout, sharp-pointed spikes at the end of its tail. If an enemy like *Ceratosaurus* tried to creep up from behind—a common predatory tactic—it would be in for a nasty shock. With a flick of its spiked tail, the stegosaur could inflict terrible damage, blinding or even killing the hunter outright. It might have been a slow-moving plant-eater, but *Dacentrurus* could look after itself.

Ankylosaurs

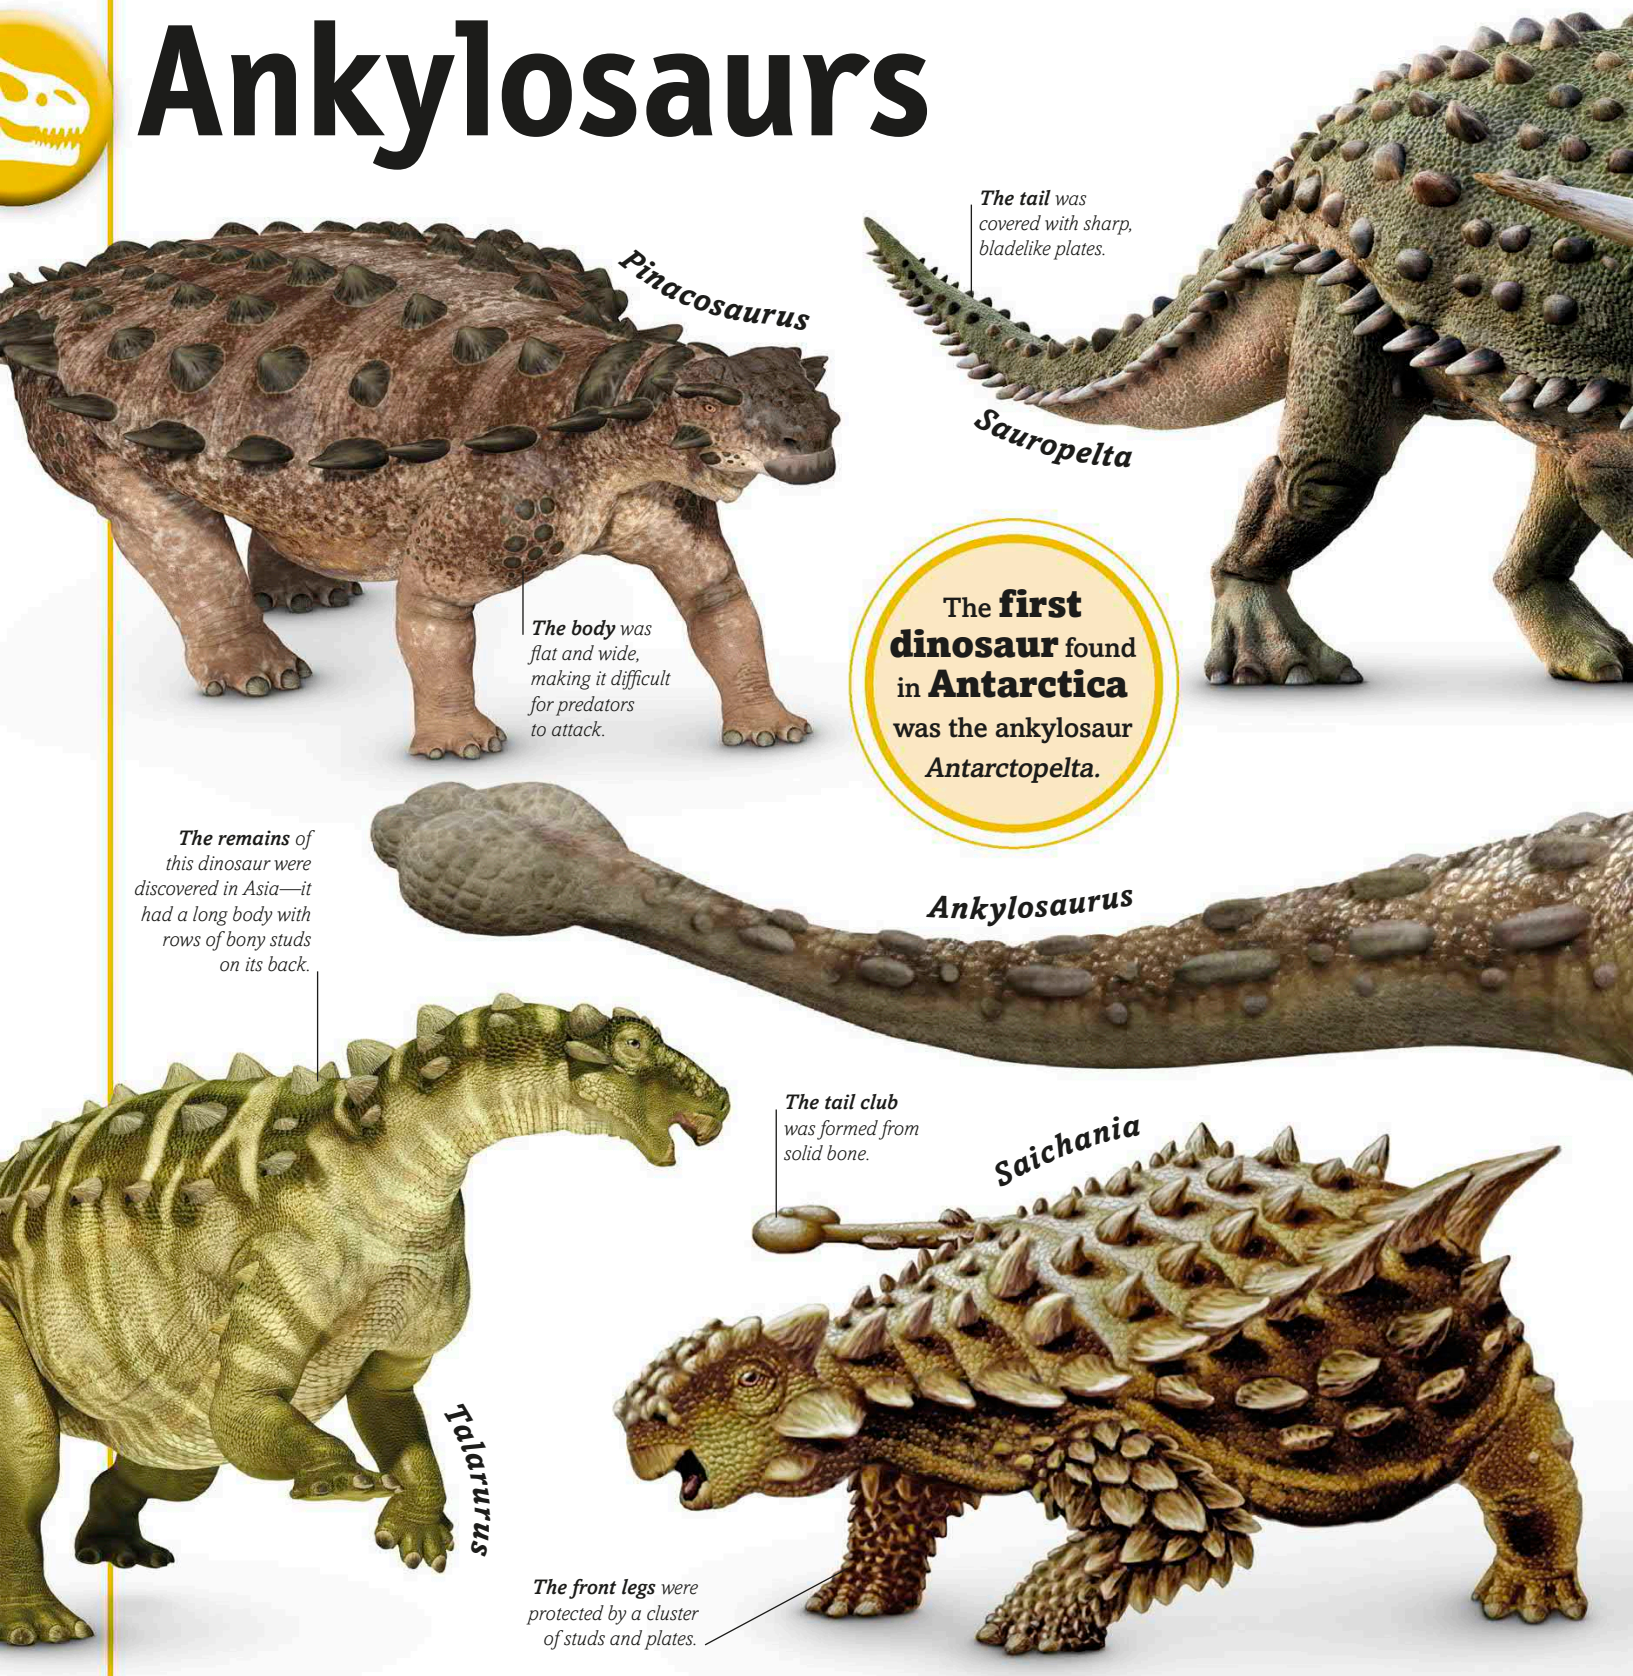

Protected from head to tail, the tanklike ankylosaurs first appeared about 175 million years ago. They were slow-moving plant-eaters, so without their body armor, they would have been easy targets for predators. Early ankylosaurs such as ***Scelidosaurus*** had bodies covered with bony plates and studs strong enough to break the teeth of any attacking dinosaur. But as predators got bigger and more powerful, ankylosaurs such as ***Saichania*** developed thick armor that may have discouraged even the massive-jawed

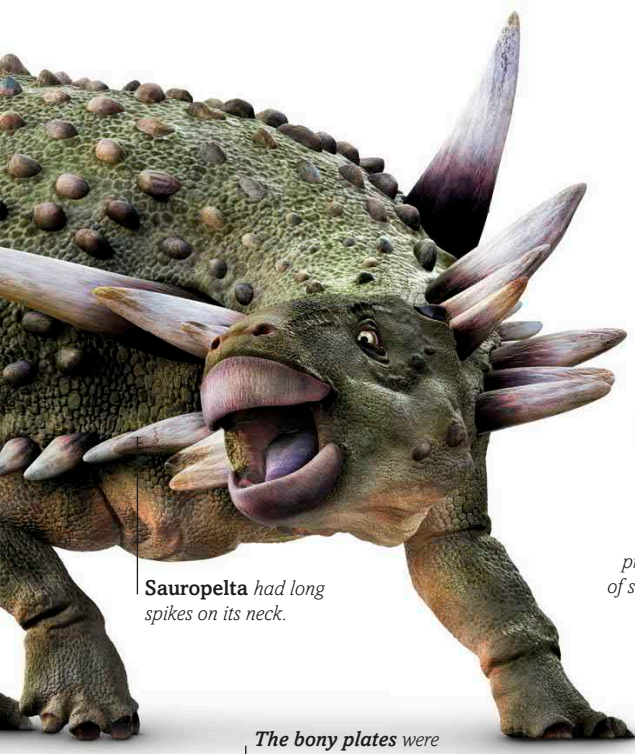

Sauropelta *had long spikes on its neck.*

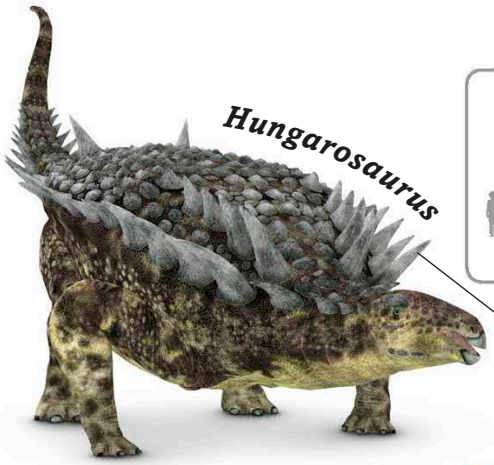

Rows of spikes *jutted from the sides of* Hungarosaurus.

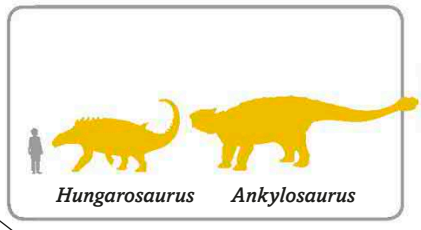

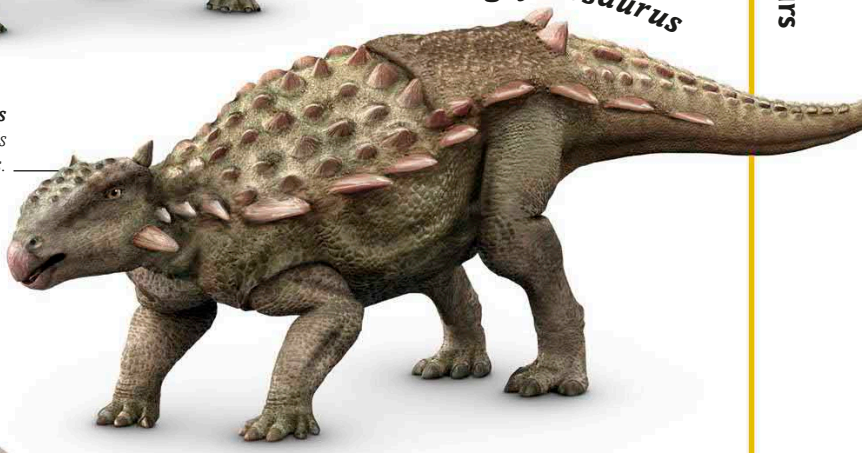

Armor plates *protected the heads of some ankylosaurs.*

The bony plates *were embedded in the thick skin.*

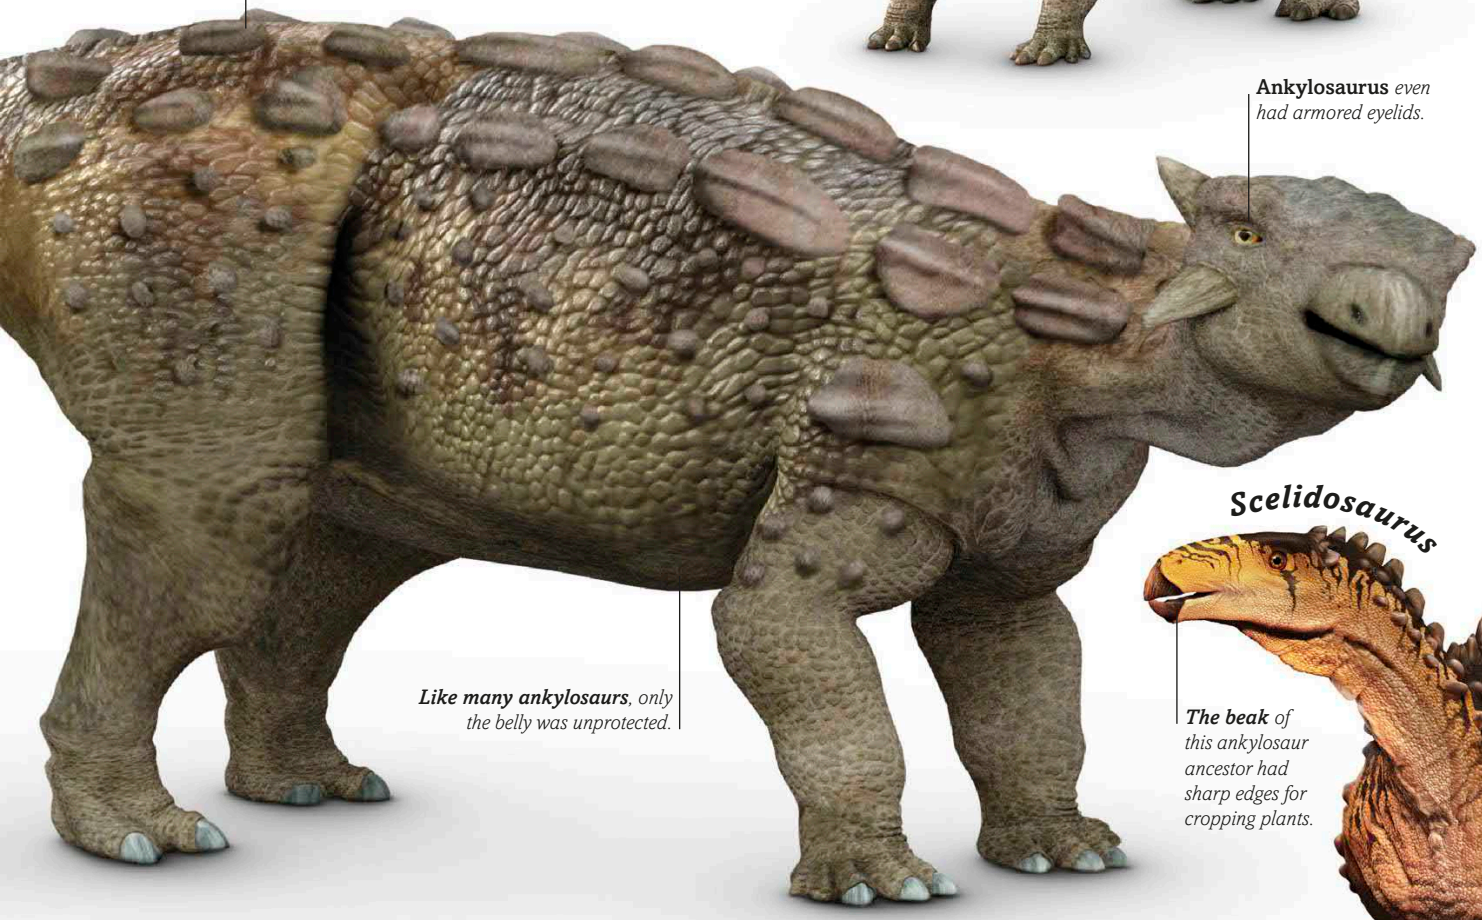

Ankylosaurus *even had armored eyelids.*

Like many ankylosaurs*, only the belly was unprotected.*

The beak *of this ankylosaur ancestor had sharp edges for cropping plants.*

tyrannosaurs. Like several others, including ***Ankylosaurus***, *Saichania* also had a hefty tail club to swipe at predators, inflicting serious injury. Others, such as ***Sauropelta***, had long shoulder spikes that may have been as much for show as for defense. Many had broad mouths, ideal for gathering plant food in bulk, without being too selective, much like modern elephants. Their bulky bodies contained big digestive systems for processing their fibrous diet.

Dinosaur defense

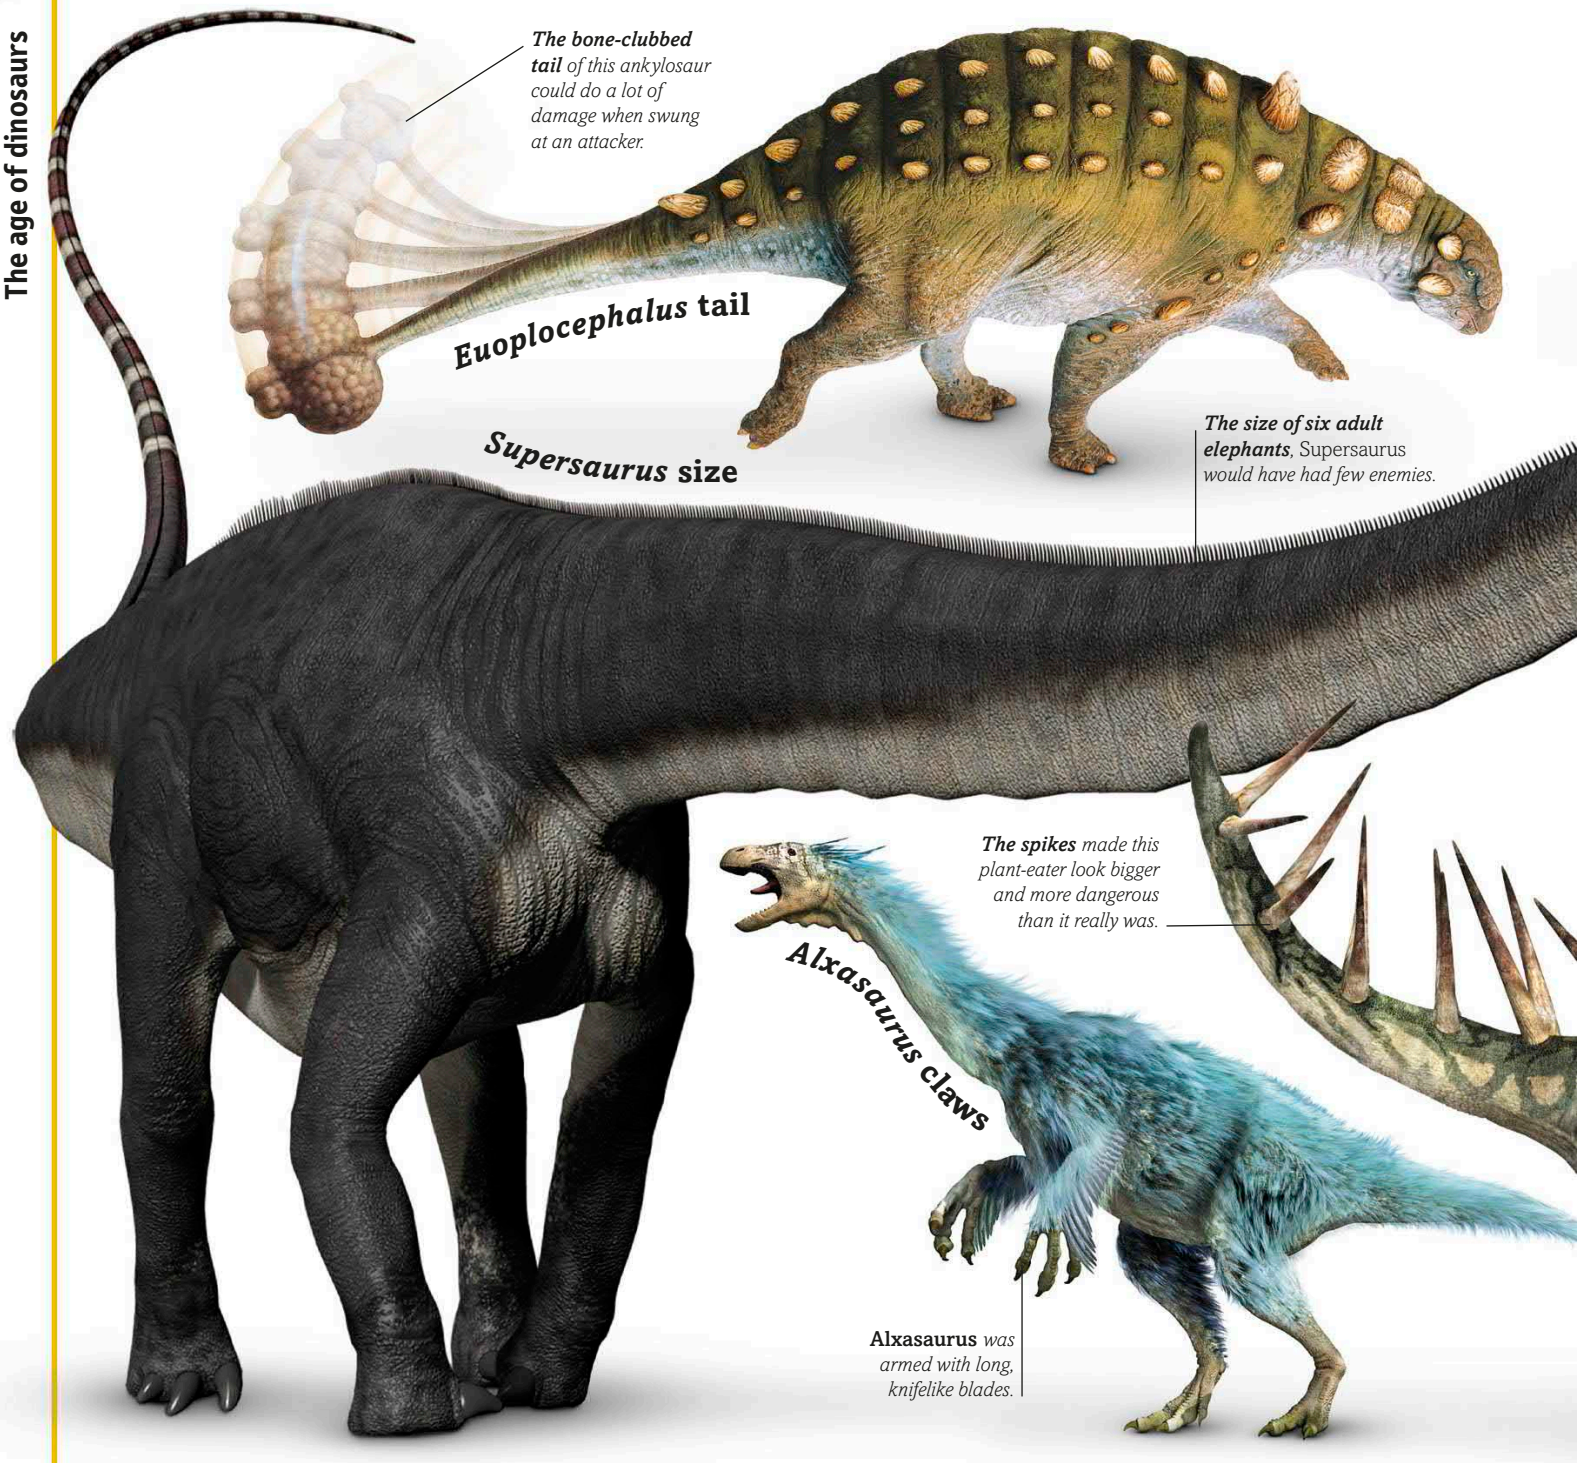

Life was dangerous for many dinosaurs. They faced powerful predators—fierce meat-eating theropods with huge jaws and big appetites. For a few giant dinosaurs like ***Supersaurus***, their sheer size was enough to make hunters choose easier targets. Small dinosaurs could hide or run away from trouble, as was the case with the ostrichlike dinosaur ***Struthiomimus***. The stiff bristles on the back of ***Heterodontosaurus*** may have deterred enemies like the quills of porcupines. The big plant-eater ***Kentrosaurus*** ("spiked lizard") was

heavily armored with plates and spikes. It could use its spiked tail as a defensive weapon, just like the club-tailed ***Euoplocephalus***, lashing out at an attacker. ***Styracosaurus*** had an impressive array of horns, which may have been useful in a tight corner. Others like ***Alxasaurus*** had long, curved claws on its hands that could inflict serious damage, and the bone-headed ***Pachycephalosaurus*** may have even charged its enemies head first. Sometimes attack was the best form of defense.

Iguanodontians

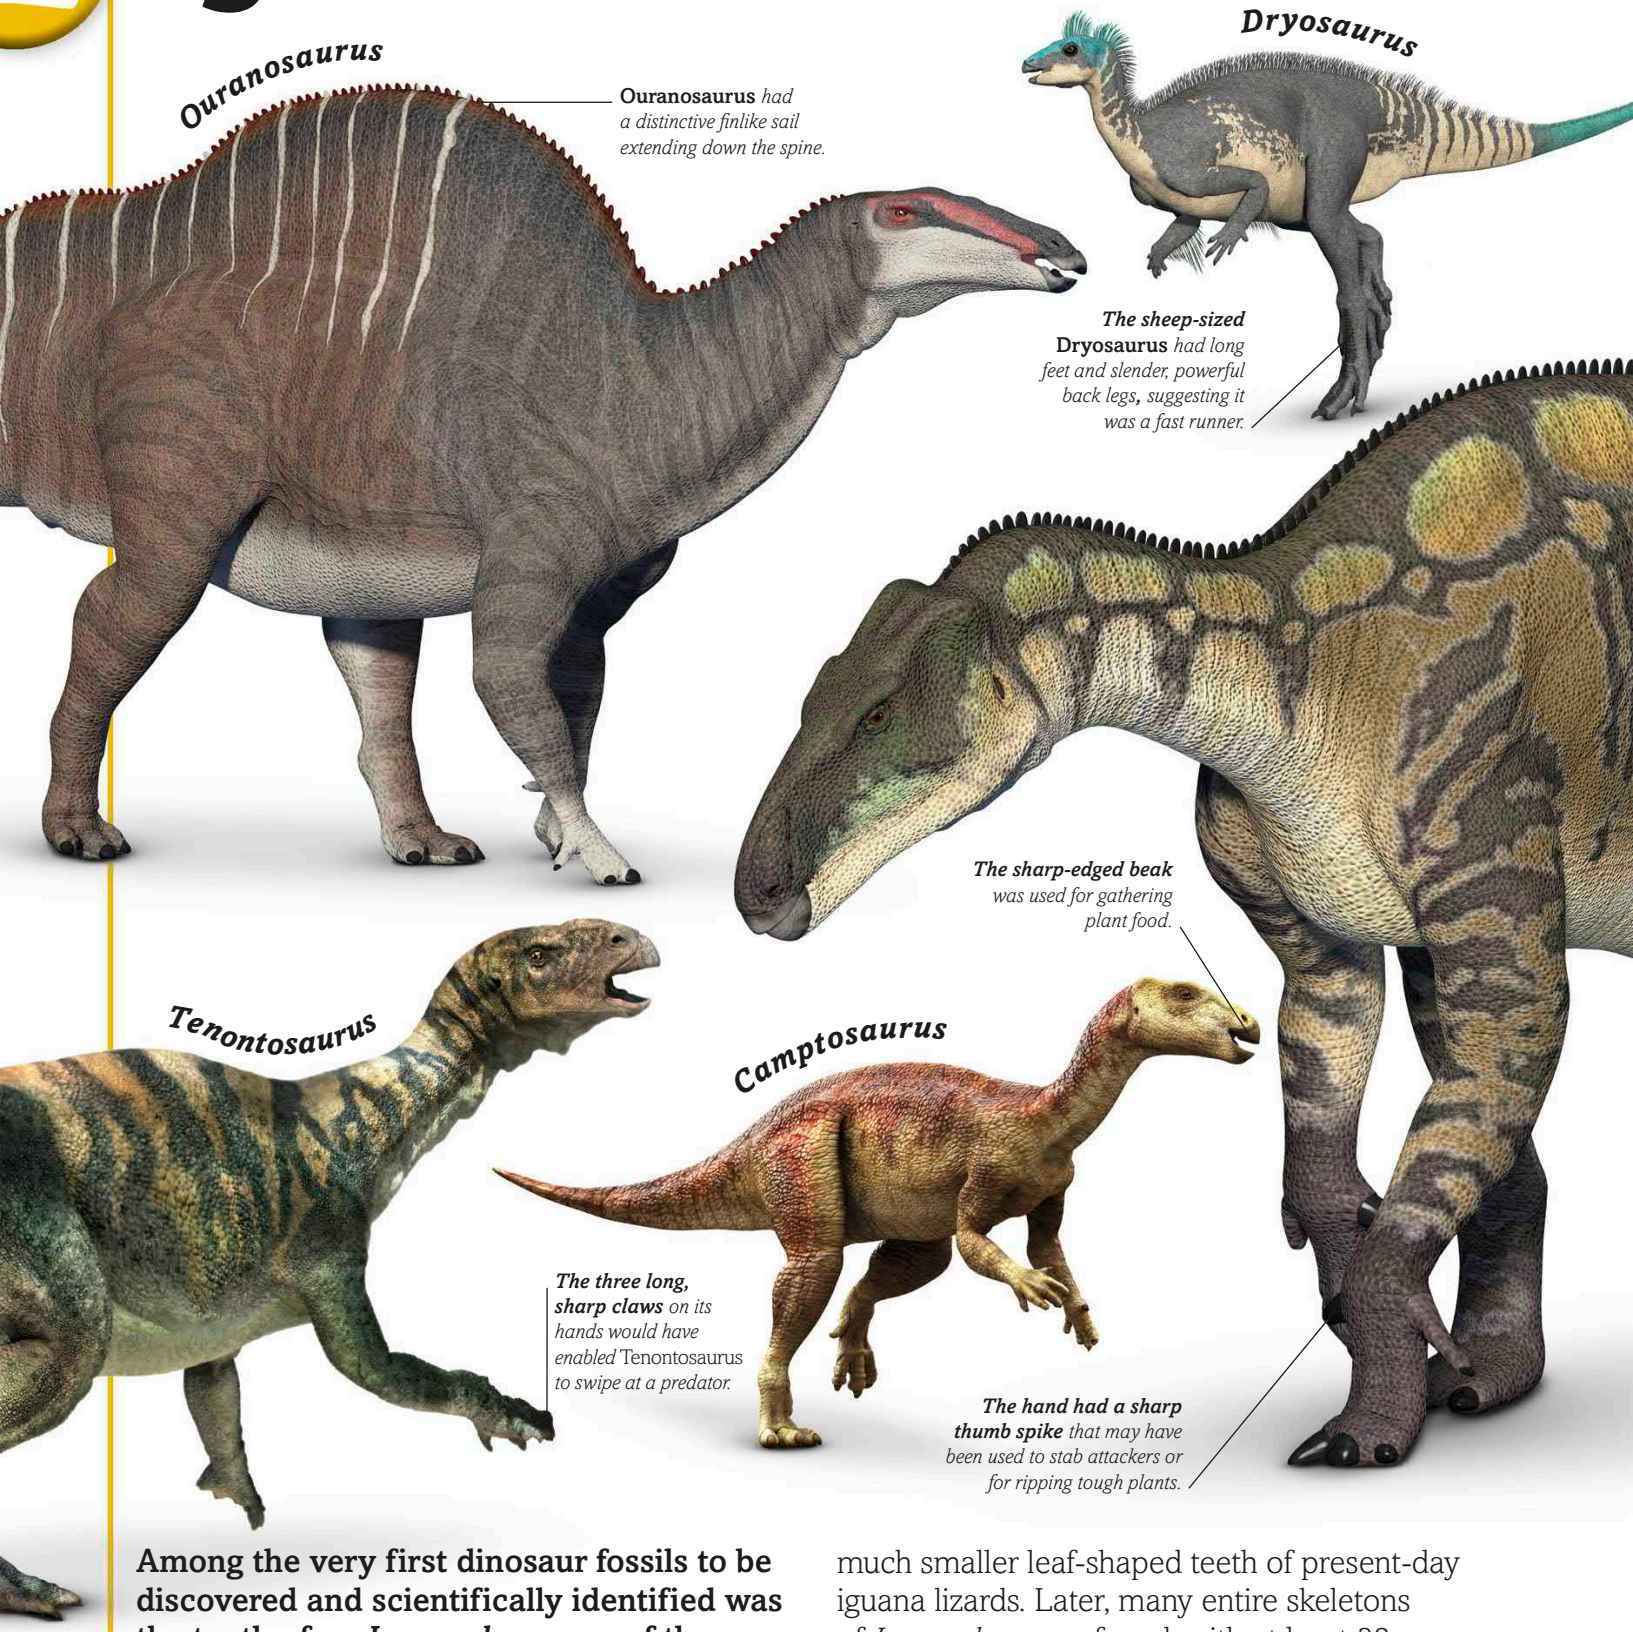

Among the very first dinosaur fossils to be discovered and scientifically identified was the tooth of an *Iguanodon*—one of the biggest plant-eating ornithopods. It was found in England in 1822, and given the name "iguana tooth" because of its similarity to the much smaller leaf-shaped teeth of present-day iguana lizards. Later, many entire skeletons of *Iguanodon* were found, with at least 38 discovered at one site in France, so it was probably a very common animal 135–125 million years ago. But *Iguanodon* was one of

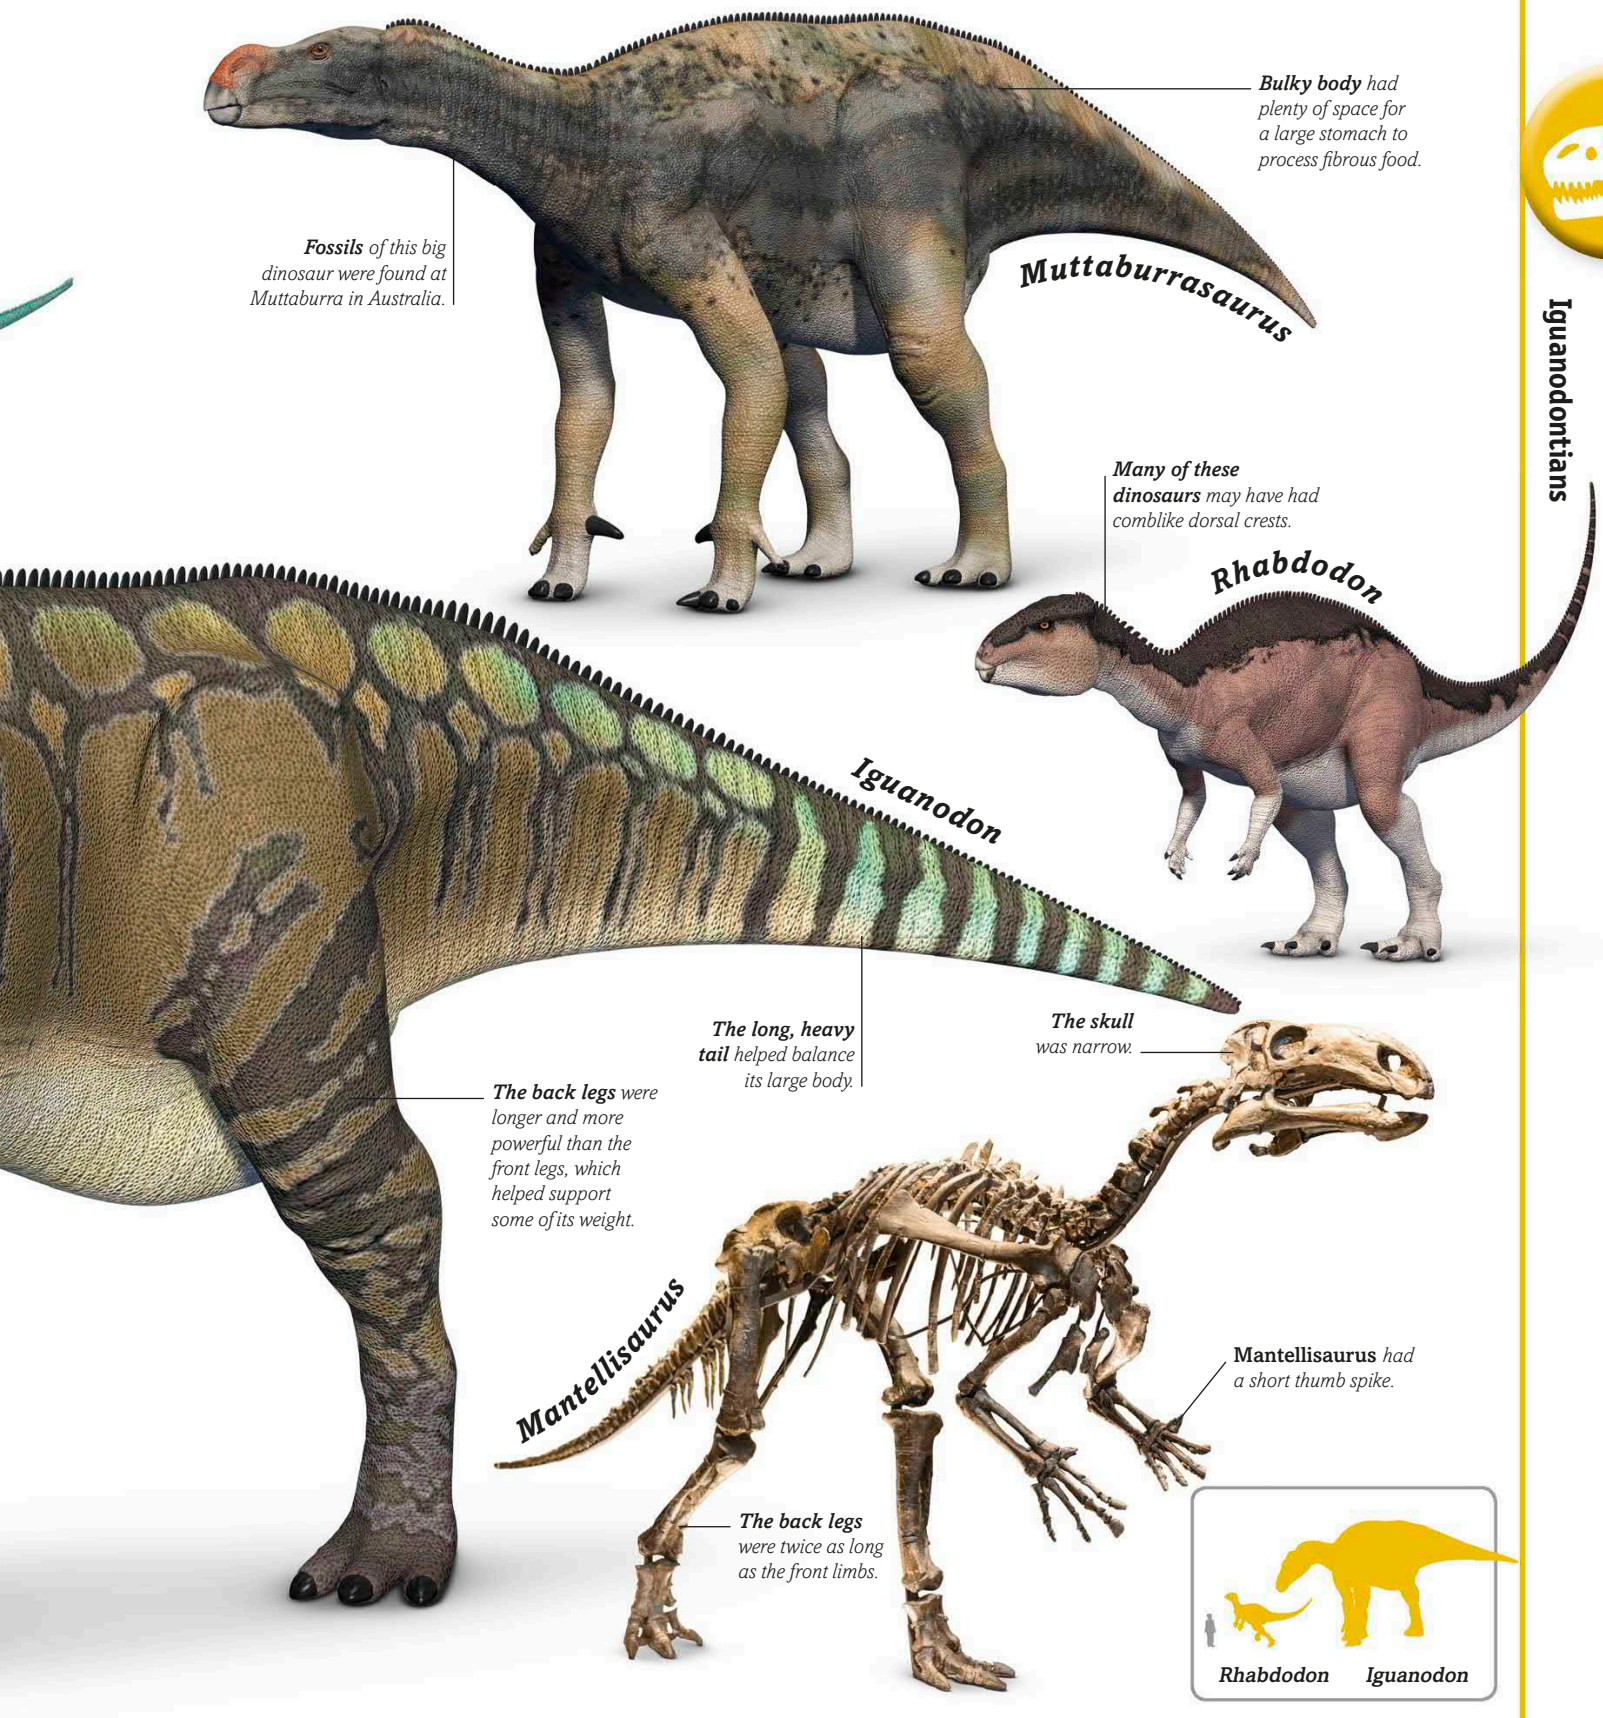

many similar dinosaurs. They all had strong hind legs and shorter, weaker arms, and the smaller ones such as ***Dryosaurus*** may have walked on their hind legs. Many, including ***Tenontosaurus***, ***Muttaburrasaurus***, and the elephant-sized *Iguanodon* itself, were more heavily built and supported some of their weight with their forelimbs. Despite this, their hands were adapted for a variety of tasks, with hooflike middle fingers; a mobile grasping fifth finger; and a stout spike on the thumb that may have been used as a defensive weapon.

Plant-eaters

Plant-eating dinosaurs used their teeth in different ways. The long-necked sauropods and their relatives—animals like ***Diplodocus***—had specialized front teeth for gathering plants. Some used their teeth like combs to strip leaves from the twigs of trees and bushes. Many do not seem to have chewed their food, and just swallowed the leaves whole. Other plant-eaters like ***Edmontosaurus*** and ***Psittacosaurus*** had sharp beaks for gathering food, and specially adapted cheek teeth for chewing it. The teeth of some of these animals, such as ***Iguanodon***,

JAW MOVEMENT

Most modern plant-eating animals chew their food. This involves grinding their teeth together using complex jaw movements—up and down, side to side, or forward and backward. The skulls and jaw bones of plant-eating dinosaurs show that some of these animals did the same. The jaws of *Psittacosaurus* and many hadrosaurs could slide forward and backward, and ankylosaurs could probably chew by moving their jaws from side to side, just like sheep.

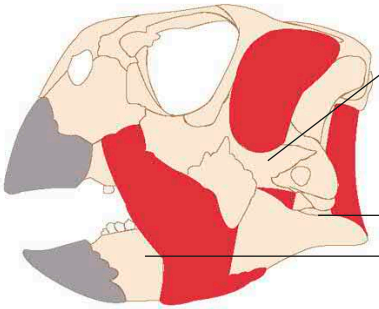

Psittacosaurus

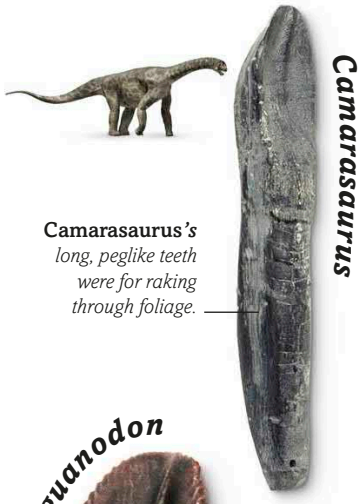

Camarasaurus's *long, peglike teeth were for raking through foliage.*

Iguanodon's *flattened teeth* *had serrated edges.*

The leaf-shaped teeth *were ideal for snipping leaves from the twigs.*

The front teeth *were specialized for cropping low-growing plants.*

The parrotlike beak *was used to gather plant food and may even have been used to crack nuts.*

Hundreds of teeth *formed a complex grinding surface.*

were saw-edged for cutting up leaves, but hadrosaurs such as *Edmontosaurus* had hundreds of teeth packed together to form a filelike surface, specialized for reducing leaves and other plant material to a pulp. This made food much easier to digest, so the hadrosaurs did not need to spend so much of their time eating. As with all dinosaurs, the old, damaged teeth were continuously replaced by new ones, so they never wore out.

Hadrosaurs

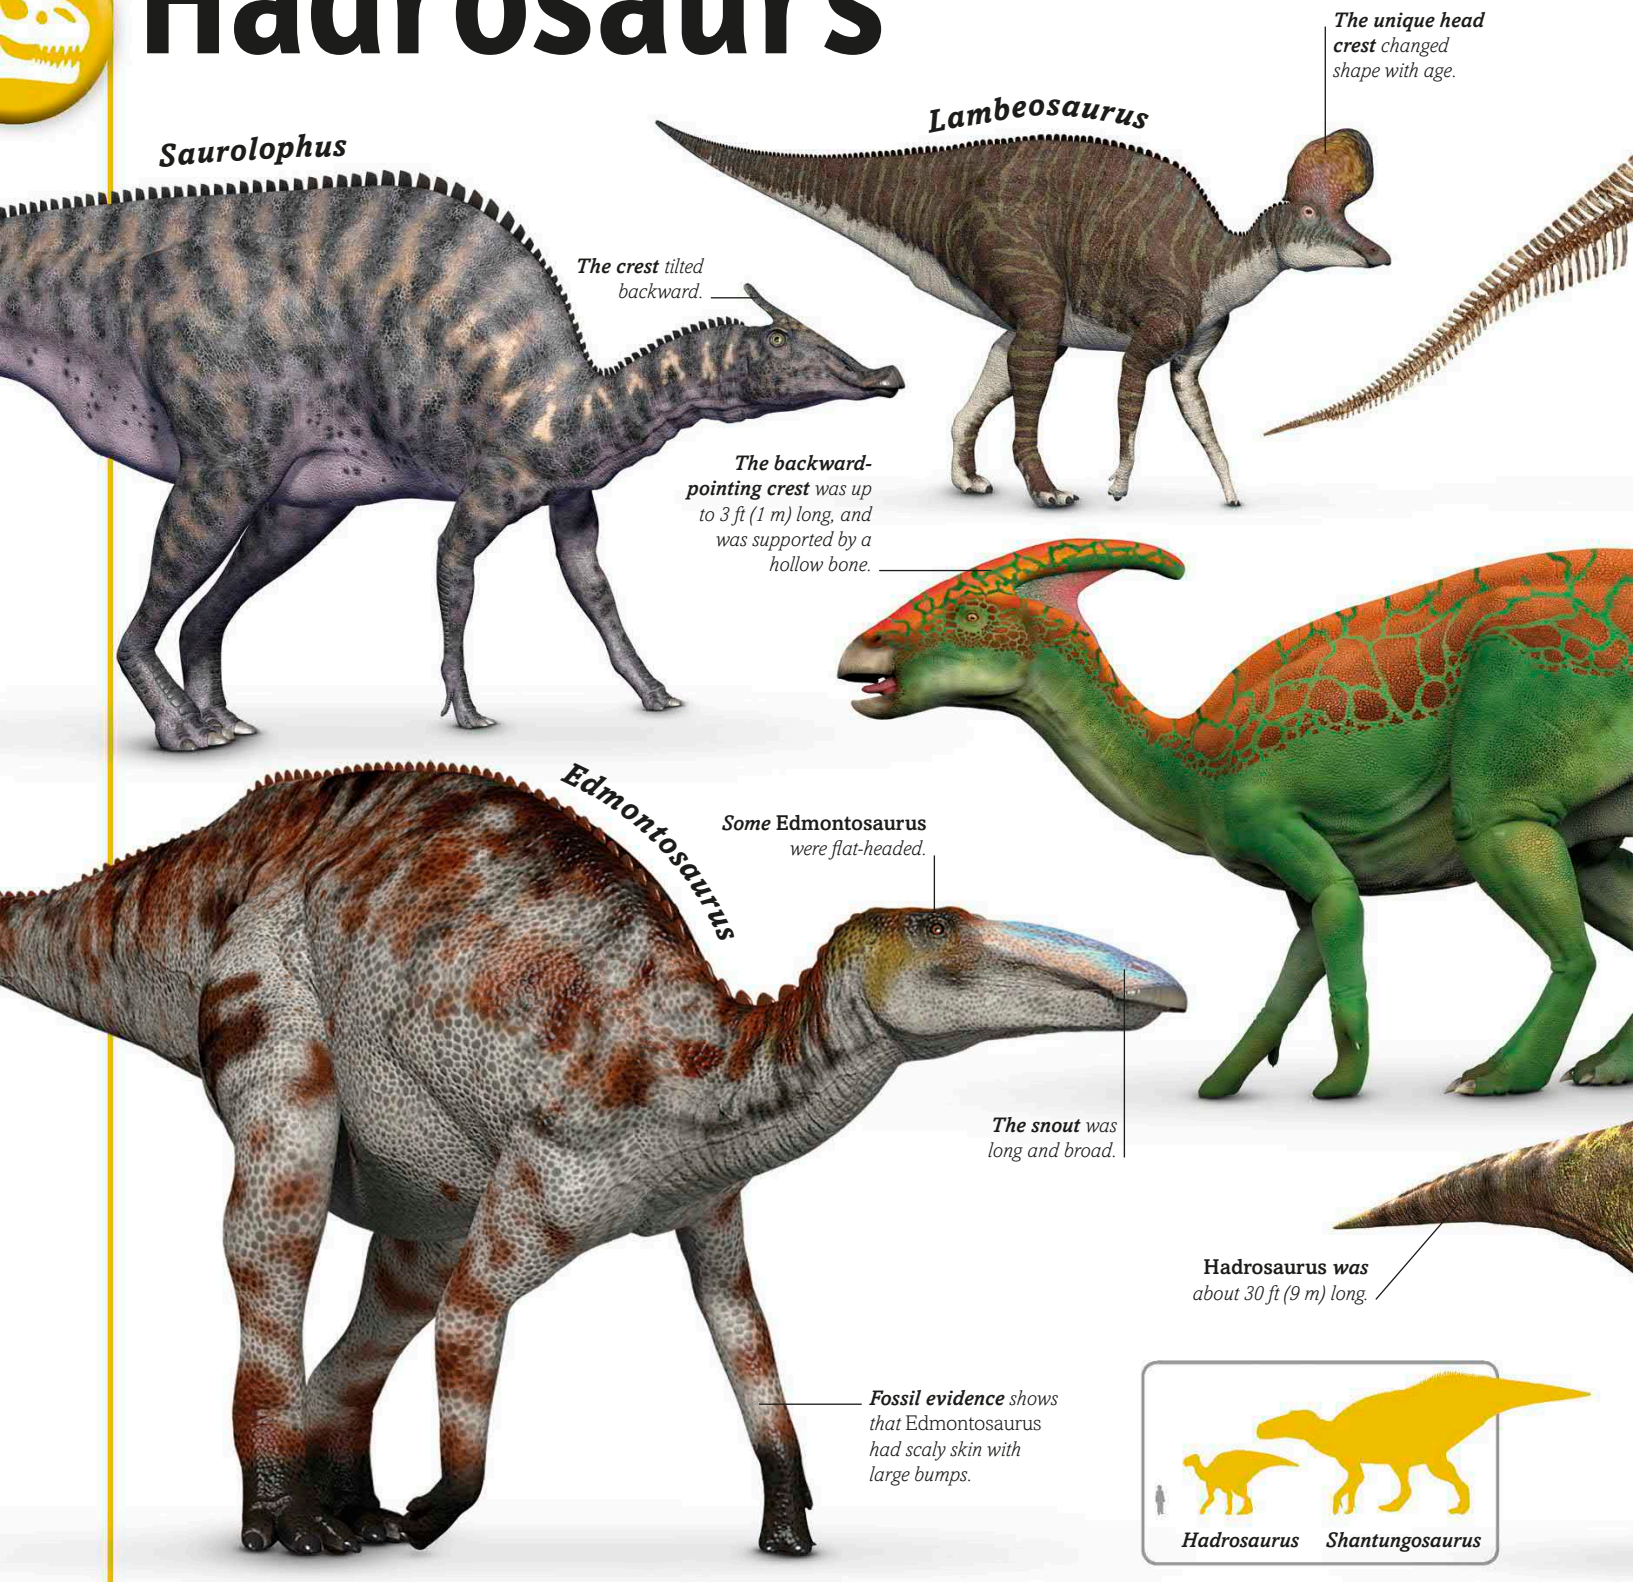

Hadrosaurs lived during the Cretaceous Period, between 100–66 million years ago. They roamed the forests and swamps of North and South America, Europe, and Asia. They were large plant-eaters, and many of them had a broad, ducklike beak that they used to crop leaves. Similar to earlier iguanodontians, but with more complex teeth and jaws, hadrosaurs had jaws lined with hundreds of teeth arranged like the teeth of a file. Grinding together, these teeth reduced tough plant food to a juicy, easily digested pulp, ensuring that a

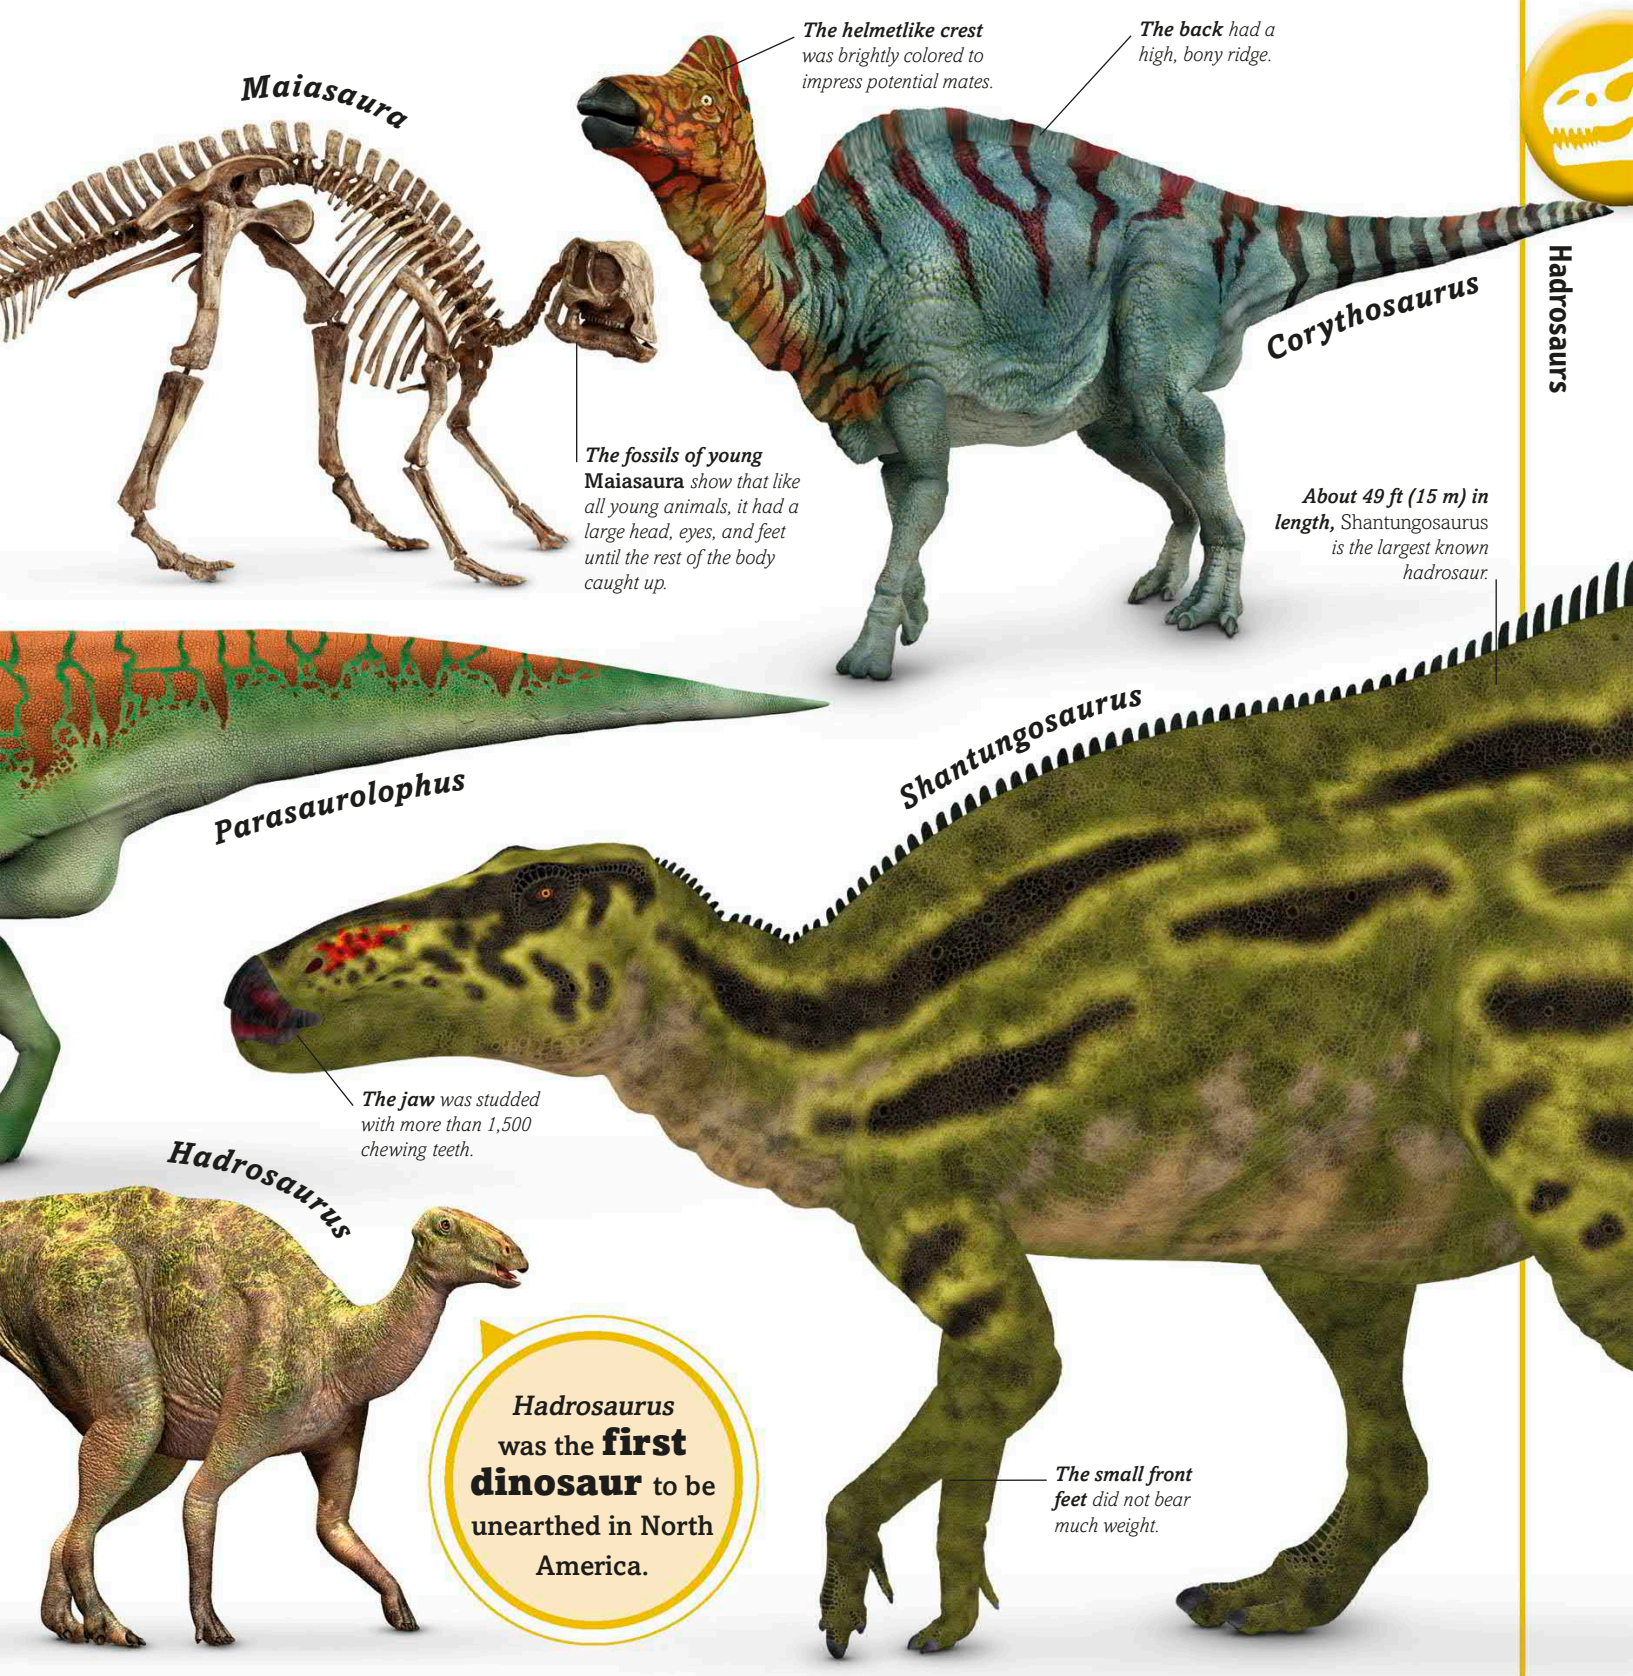

hadrosaur, such as ***Edmontosaurus***, got as much nutrition as possible from every mouthful. Many hadrosaurs, including ***Lambeosaurus***, also had impressive crests on their heads that could have been used to attract mates or for temperature control. The crests of some, such as ***Parasaurolophus***, formed bony tubes that may have helped to amplify their calls, making them sound like trumpeting elephants. They lived in herds, calling to each other to stay in contact as they roamed the forests of the Cretaceous world.

Cool crests

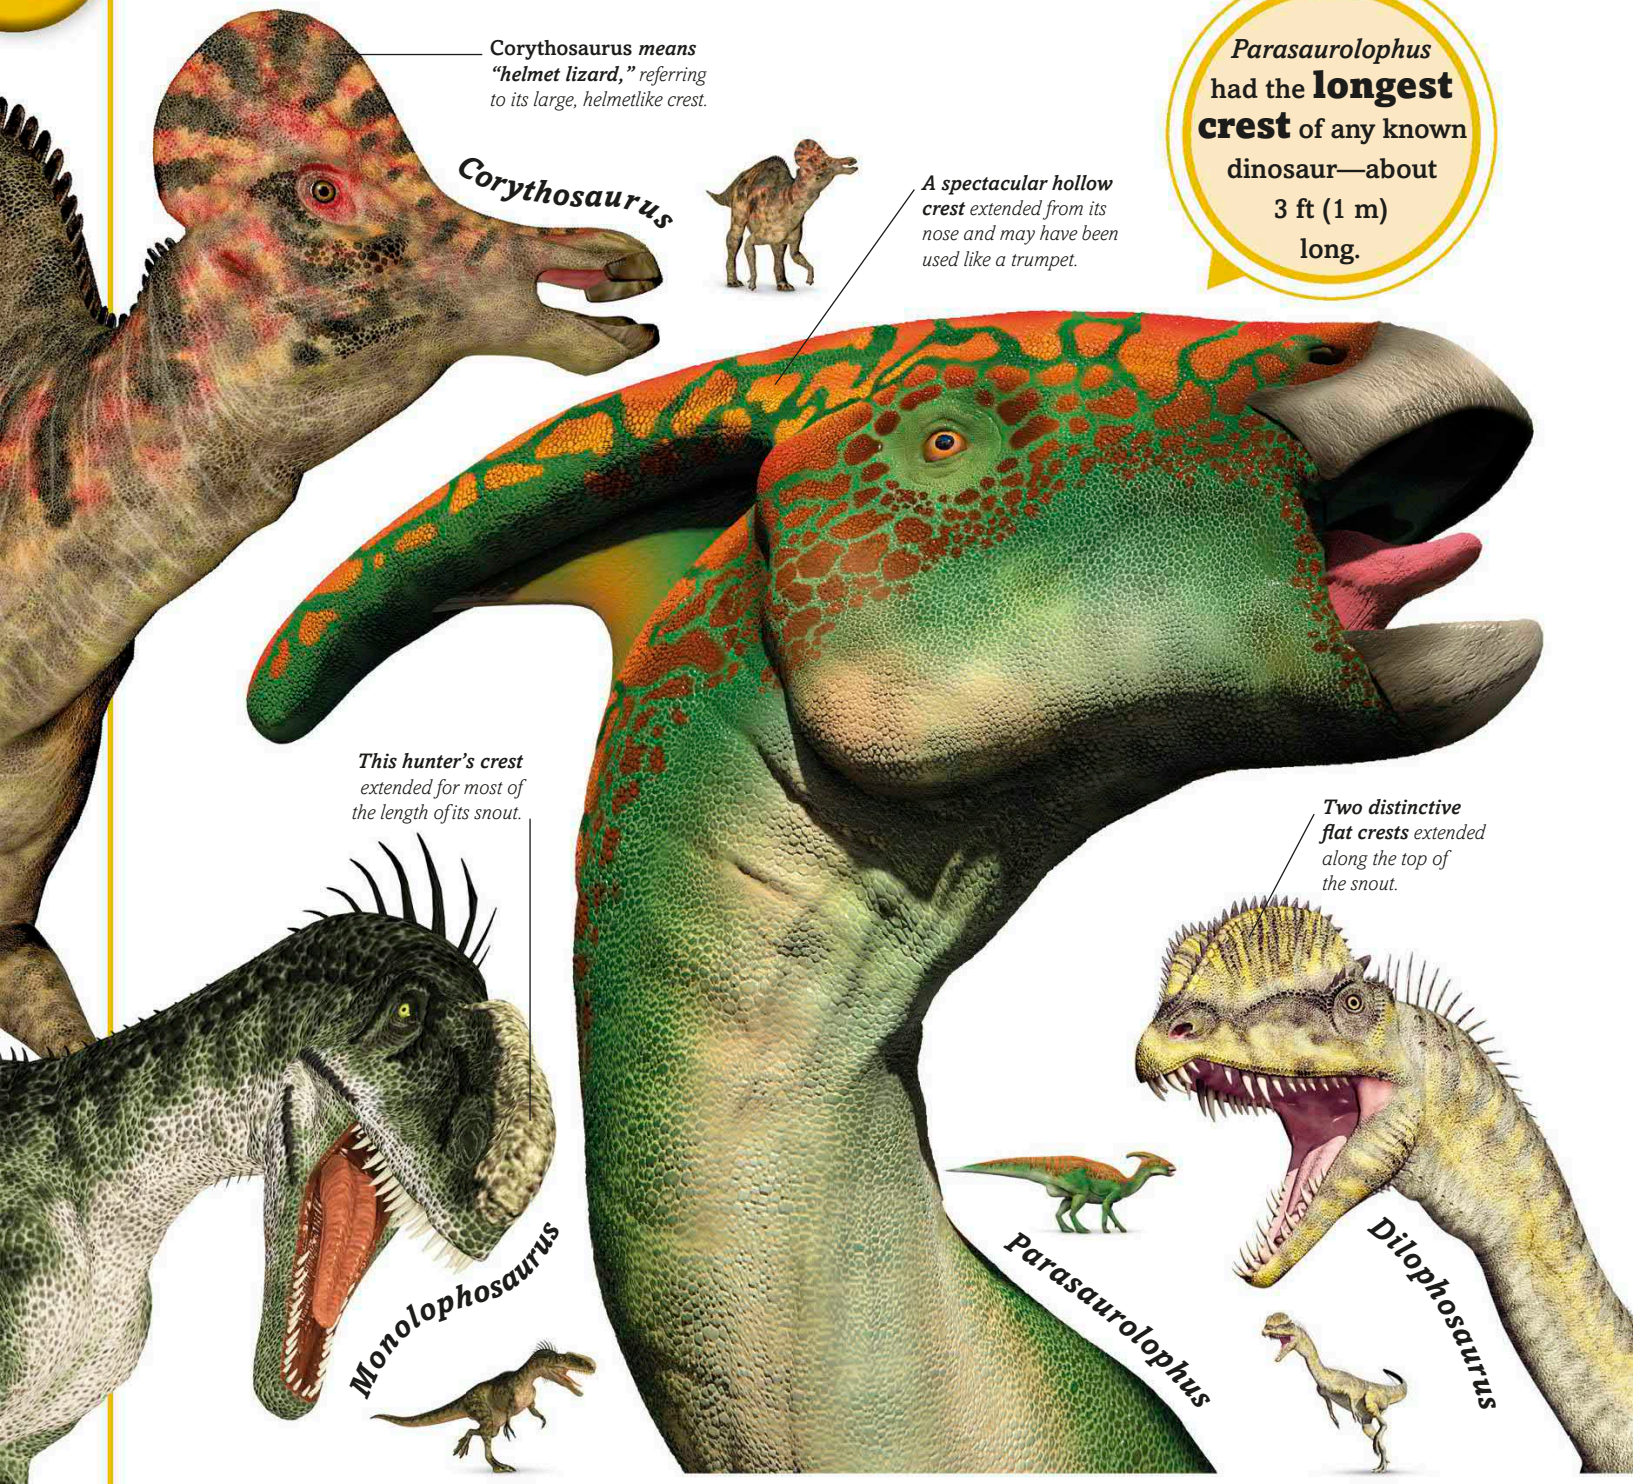

The skulls of many dinosaurs were equipped with bony features that may have supported impressive crests. The bones were probably extended by extra structures made of tough keratin, like the horns of cattle or sheep, or covered by colorful skin. Some of the most spectacular crests belonged to hadrosaurs, such as ***Corythosaurus***, ***Olorotitan***, and especially ***Parasaurolophus***. The bones of these crests were hollow—possibly to make their calls louder, since the chambers in the crests of

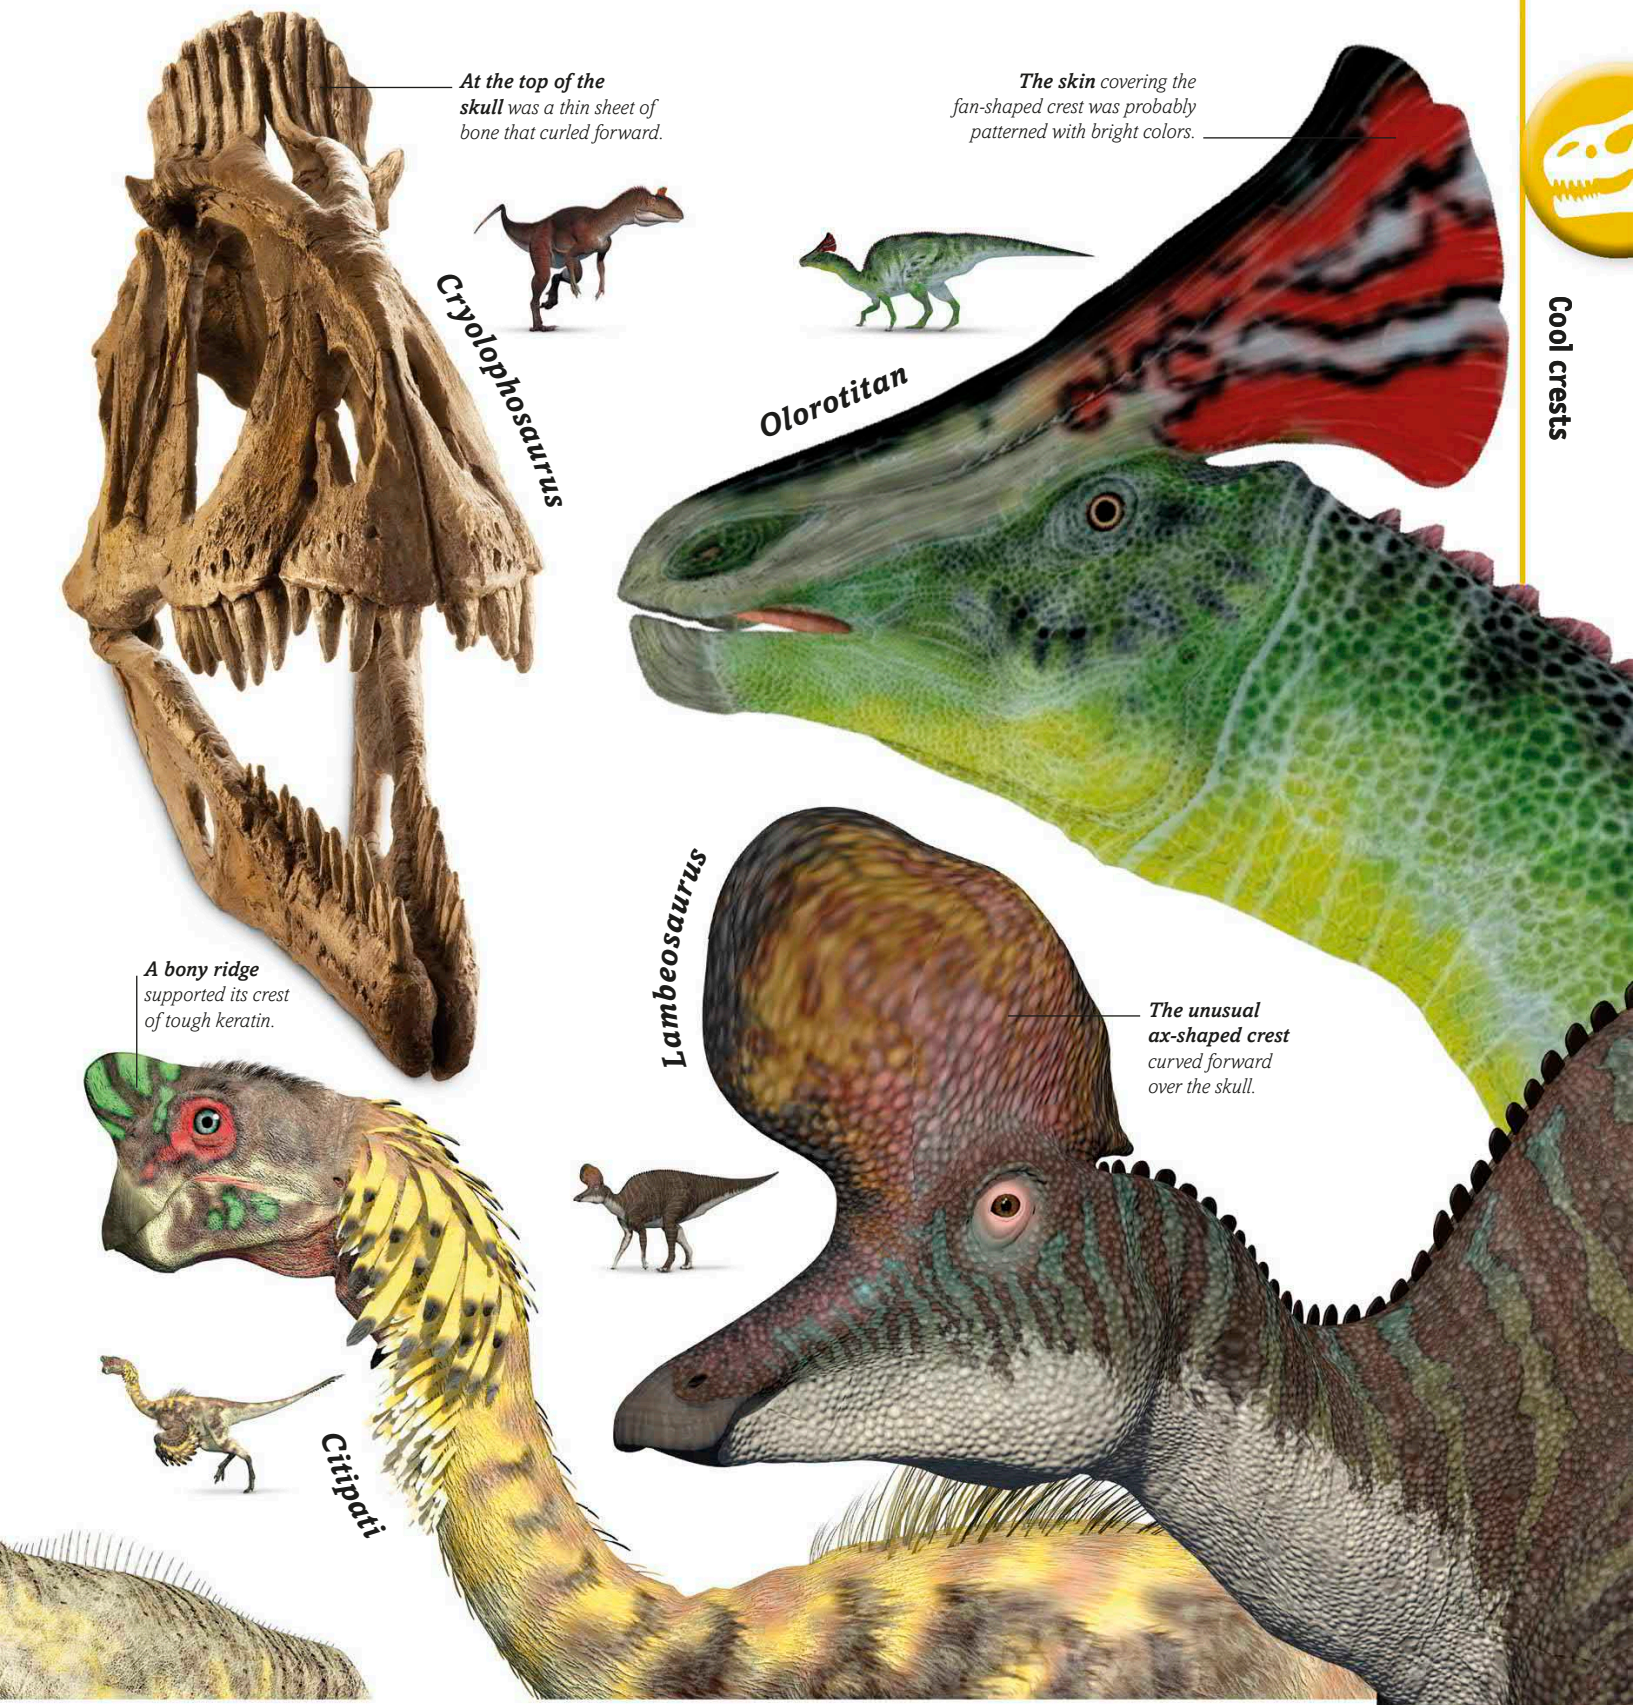

many hadrosaurs were linked to their nostrils. But hadrosaurs were not the only crested dinosaurs. Several predatory theropods had crests, too, including the double-crested ***Dilophosaurus*** and a dinosaur found in Antarctica, ***Cryolophosaurus***. Crests were also a prominent feature of beaked, birdlike oviraptorids like ***Citipati***. All these bony extensions were for show, much like the colorful feathers of many modern-day birds.

Dinosaur eggs

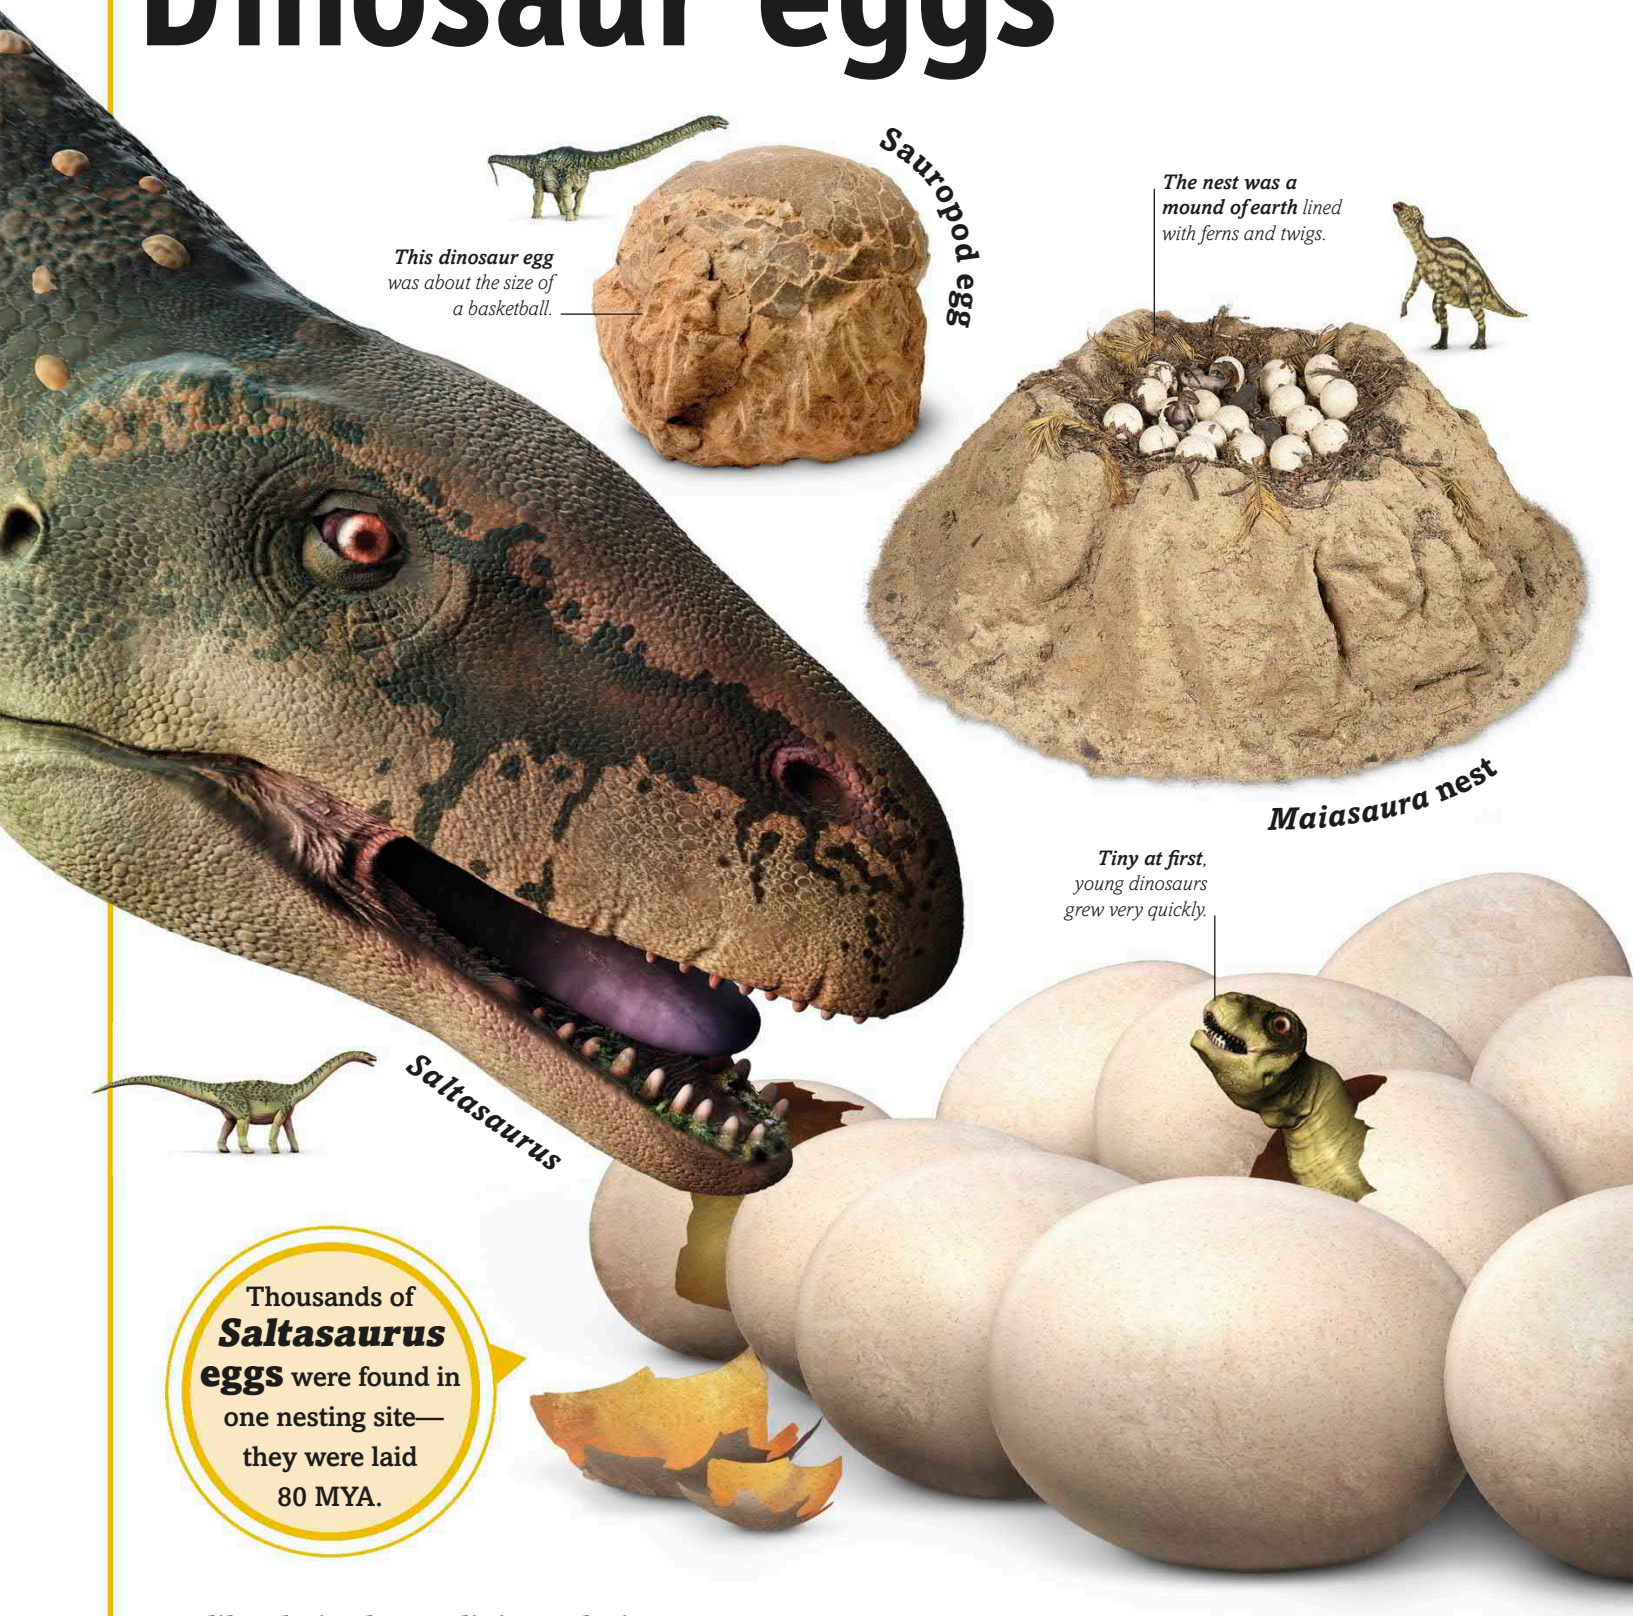

Thousands of ***Saltasaurus*** **eggs** were found in one nesting site—they were laid 80 MYA.

Just like their closest living relatives, birds and crocodiles, all dinosaurs laid eggs. They had hard, chalky shells like birds' eggs, and at some fossil sites, the ground is covered in shell fragments. Where the eggs are intact, they have clearly been laid in nests on the ground. The biggest dinosaurs such as the **sauropods** seem to have buried their eggs in warm earth, or in piles of warm, decaying vegetation like modern crocodiles. The warmth was essential to make them hatch. Many smaller, lighter dinosaurs like

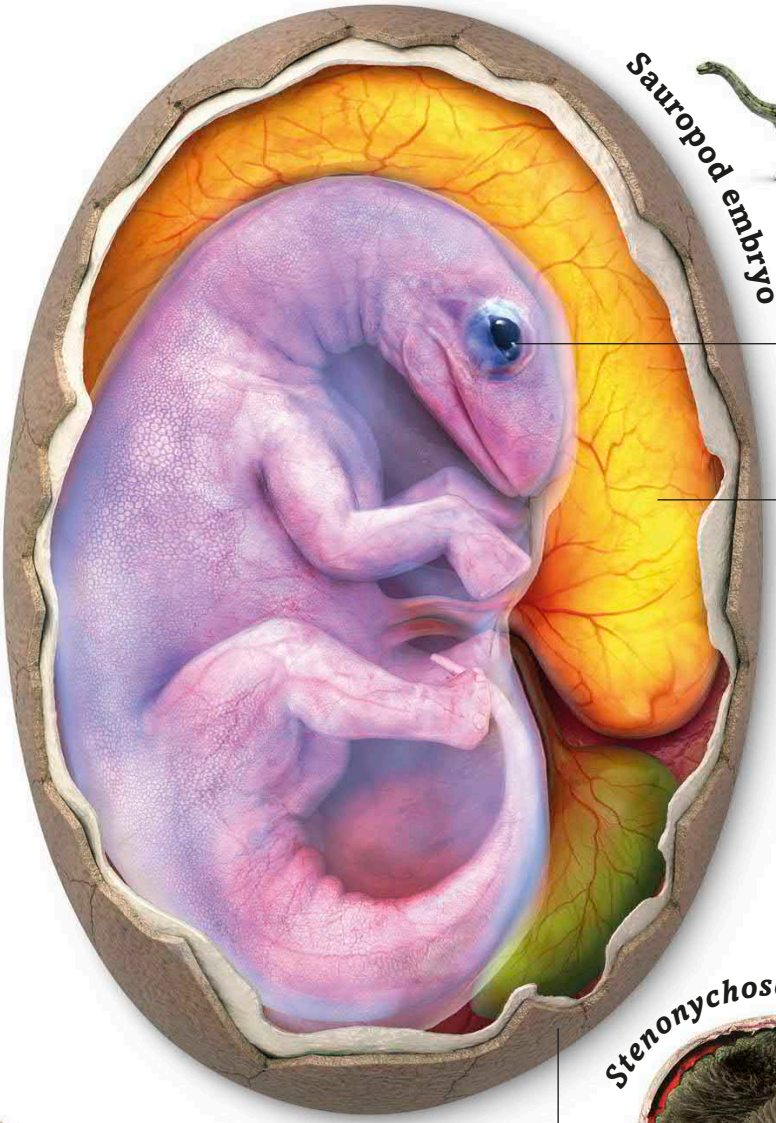

Sauropod embryo

The eyes only opened *when the dinosaur was ready to hatch.*

The yolk *contained all the food required for the unhatched dinosaur.*

COLOSSAL EGGS



One of the largest-known dinosaur eggs belonged to a giant birdlike dinosaur called *Beibeilong sinensis*. The eggs were discovered in China in a nest that was 30 ft (9 m) wide.

Oviraptor nest

These fossilized eggs *were found in the Gobi Desert of Mongolia.*

The eggshell *was strong but thin enough to allow oxygen to get through to the embryo.*

Stenonychosaurus embryo

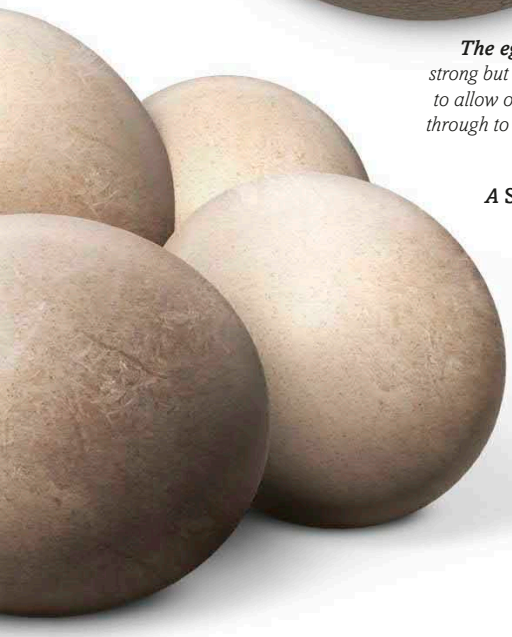

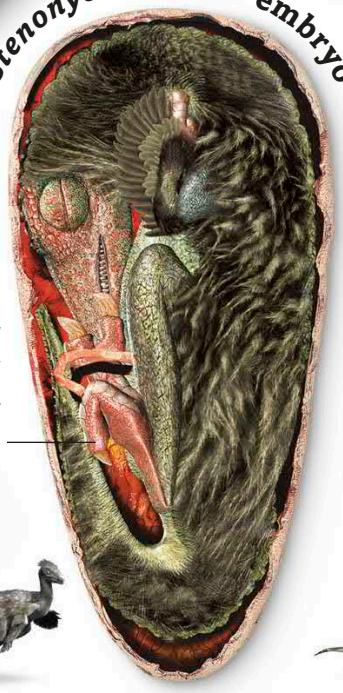

A* Stenonychosaurus *baby *would have had its head tucked between its legs—*Stenonychosaurus *was a feathered theropod dinosaur.*

Found in clutches *of up to 40, these titanosaur eggs are almost spherical.*

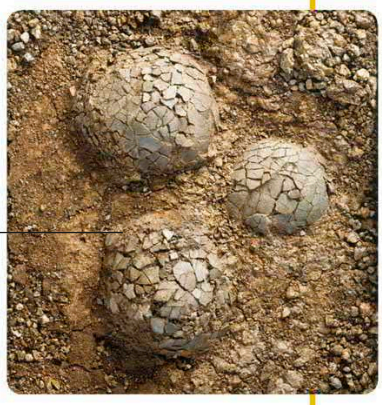

Titanosaur eggs

Oviraptor kept their eggs warm by sitting on them, just as most modern birds do. We know this because the fossilized remains of the adult dinosaurs have been found sitting on their eggs. The long-armed, feathered theropod dinosaurs known as maniraptorans may even have used their long "wing" feathers to brood and protect their eggs. The adults of some dinosaurs such as the hadrosaur ***Maiasaura*** ("good mother lizard") cared for their newly hatched young, bringing food for them and driving away predators.

DINOSAUR CRÈCHE

Around 125 million years ago, a catastrophic mudflow or fall of volcanic ash in what is now eastern China overwhelmed a nest of baby *Psittacosaurus*. They were buried along with a half-grown adult, just 6 years old. Found in 2004, their fossils seem to prove that the babies were being cared for after hatching and that their carer might not even be their parent.

Many modern animals, from songbirds to wolves, live in extended families where the half-grown young help their parents look after the babies. Some birds such as ostriches also lay their eggs in communal nests or guard their young in crèches. The *Psittacosaurus* nest contained a huge family of 34 young. It seems likely that they had more than one mother and that they were being looked after by a babysitter—probably the elder sister or brother of some of the babies. If so, such childcare may have been common among dinosaurs. *Psittacosaurus* was an early ceratopsian—an ancestor of animals like *Triceratops*. Maybe these horned giants looked after their young in the same way.

Pachycephalosaurs

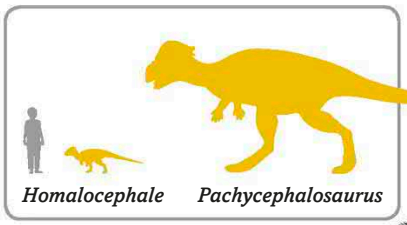

Acrotholus

Numerous small spikes *lined the head, snout, and cheeks.*

The bony shelf *was a distinctive feature of all pachycephalosaurs.*

Stegoceras

Discovered in Canada *in 2013,* Acrotholus *was about 6 ft (1.8 m) long.*

The big eye sockets *indicate that these dinosaurs had good vision.*

The long horns *may have been for display rather than fighting.*

Stygimoloch

The sharp beak *was used to gather leaves, fruit, and possibly insects.*

Small hands *were useful for collecting food.*

Dracorex

Also known as "boneheads," referring to their incredibly thick, strong skulls, pachycephalosaurs were unusual-looking dinosaurs. The largest of the boneheads was ***Pachycephalosaurus***. Its skull alone, the biggest so far, was up to 16 in (40 cm) thick and ringed with small, bony spikes. It is likely that the strong skull protected the animal's brain from regular impact inflicted during fights with rivals over status. But not all pachycephalosaurs had the same skull form. The smaller ***Homalocephale*** had a flat-topped head,

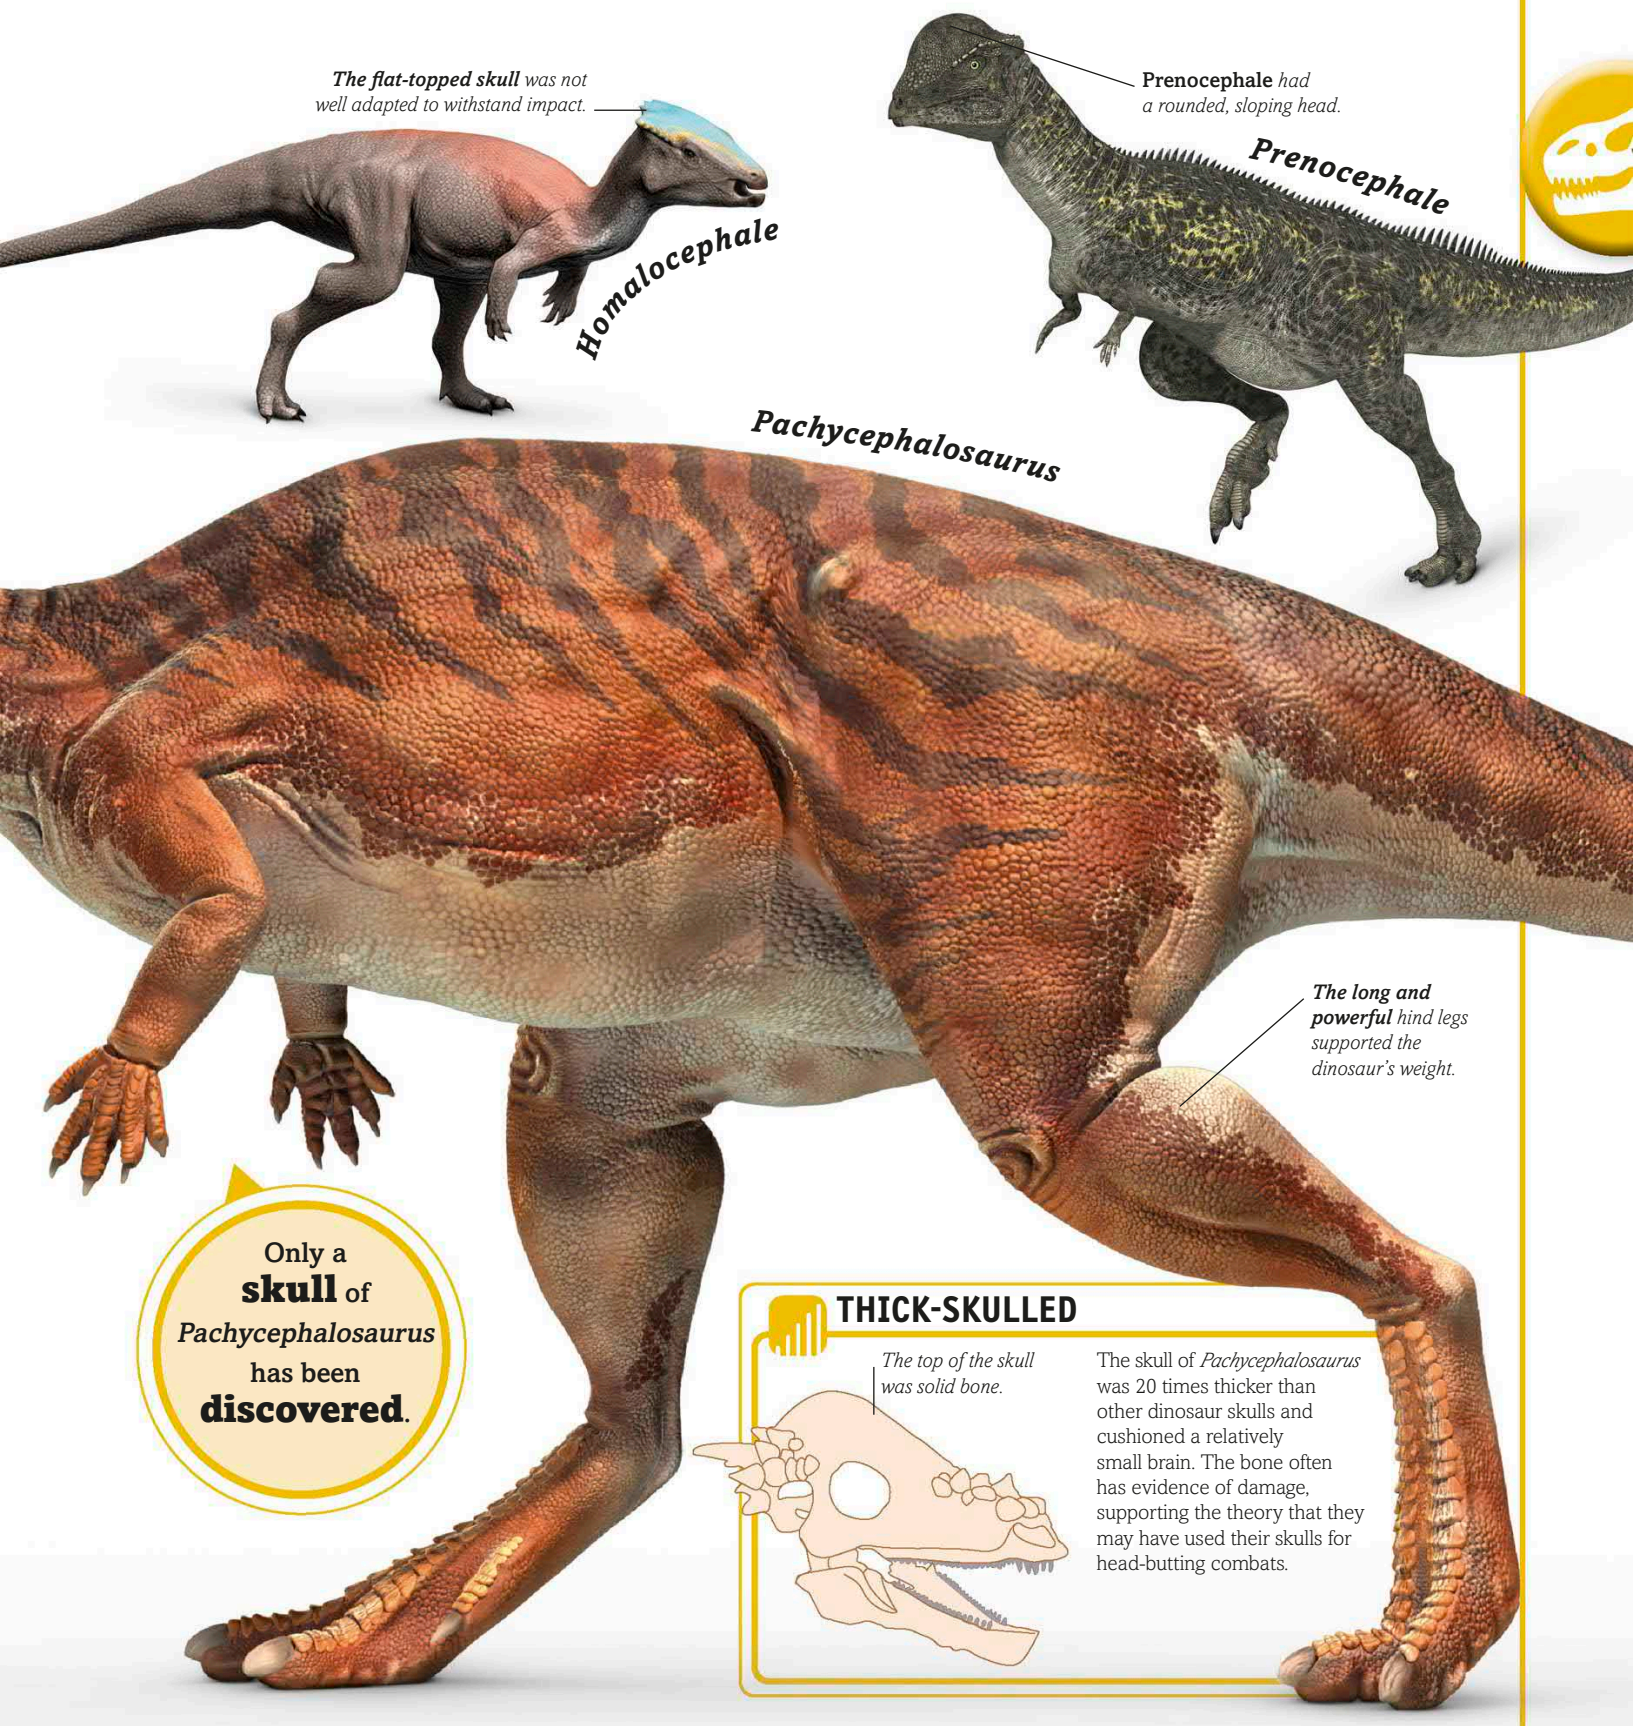

and ***Stygimoloch*** had a small dome with much longer horns. But some scientists think these smaller animals are just younger specimens of *Pachycephalosaurus*. Even though the fossil remains of these dinosaurs are very rare, enough have been found to show that pachycephalosaurs were probably fast, agile animals. The fossils also show that they had leaf-shaped teeth like other plant-eating dinosaurs and sharp, pointed teeth at the front of their jaws, suggesting that they may have eaten a variety of plant and animal food.

Ceratopsians

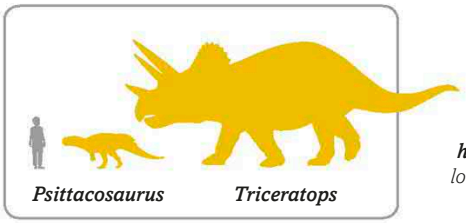

Straight horns *sprouted from the dinosaur's bony frill.*

The neck frill *had a wavy edge.*

The distinctive hooked nose horn *looked like a rhino's.*

Einiosaurus

The enormous neck frill *was edged with spikes.*

The long horns *above its eyes curved forward.*

Pentaceratops

The frill *was incredibly long, covering most of its back.*

There was a small horn *on each cheek.*

Small *nose horn*

Torosaurus

Psittacosaurus

This early Cretaceous ceratopsian *did not have a frill or elaborate horns.*

With their elaborate neck frills, huge horns, and parrotlike beaks, the ceratopsians were among the most spectacular dinosaurs. The most well-known, ***Triceratops***, was an elephant-sized animal with three horns up to 5 ft (1.5 m) long and a big bony frill extending from the back of its skull. ***Pentaceratops*** was even more flamboyant, with an enormous, probably brightly colored frill fringed by spikes. It evolved from smaller ancestors such as ***Psittacosaurus***, which was light enough to walk on two legs, but the later giants needed all four

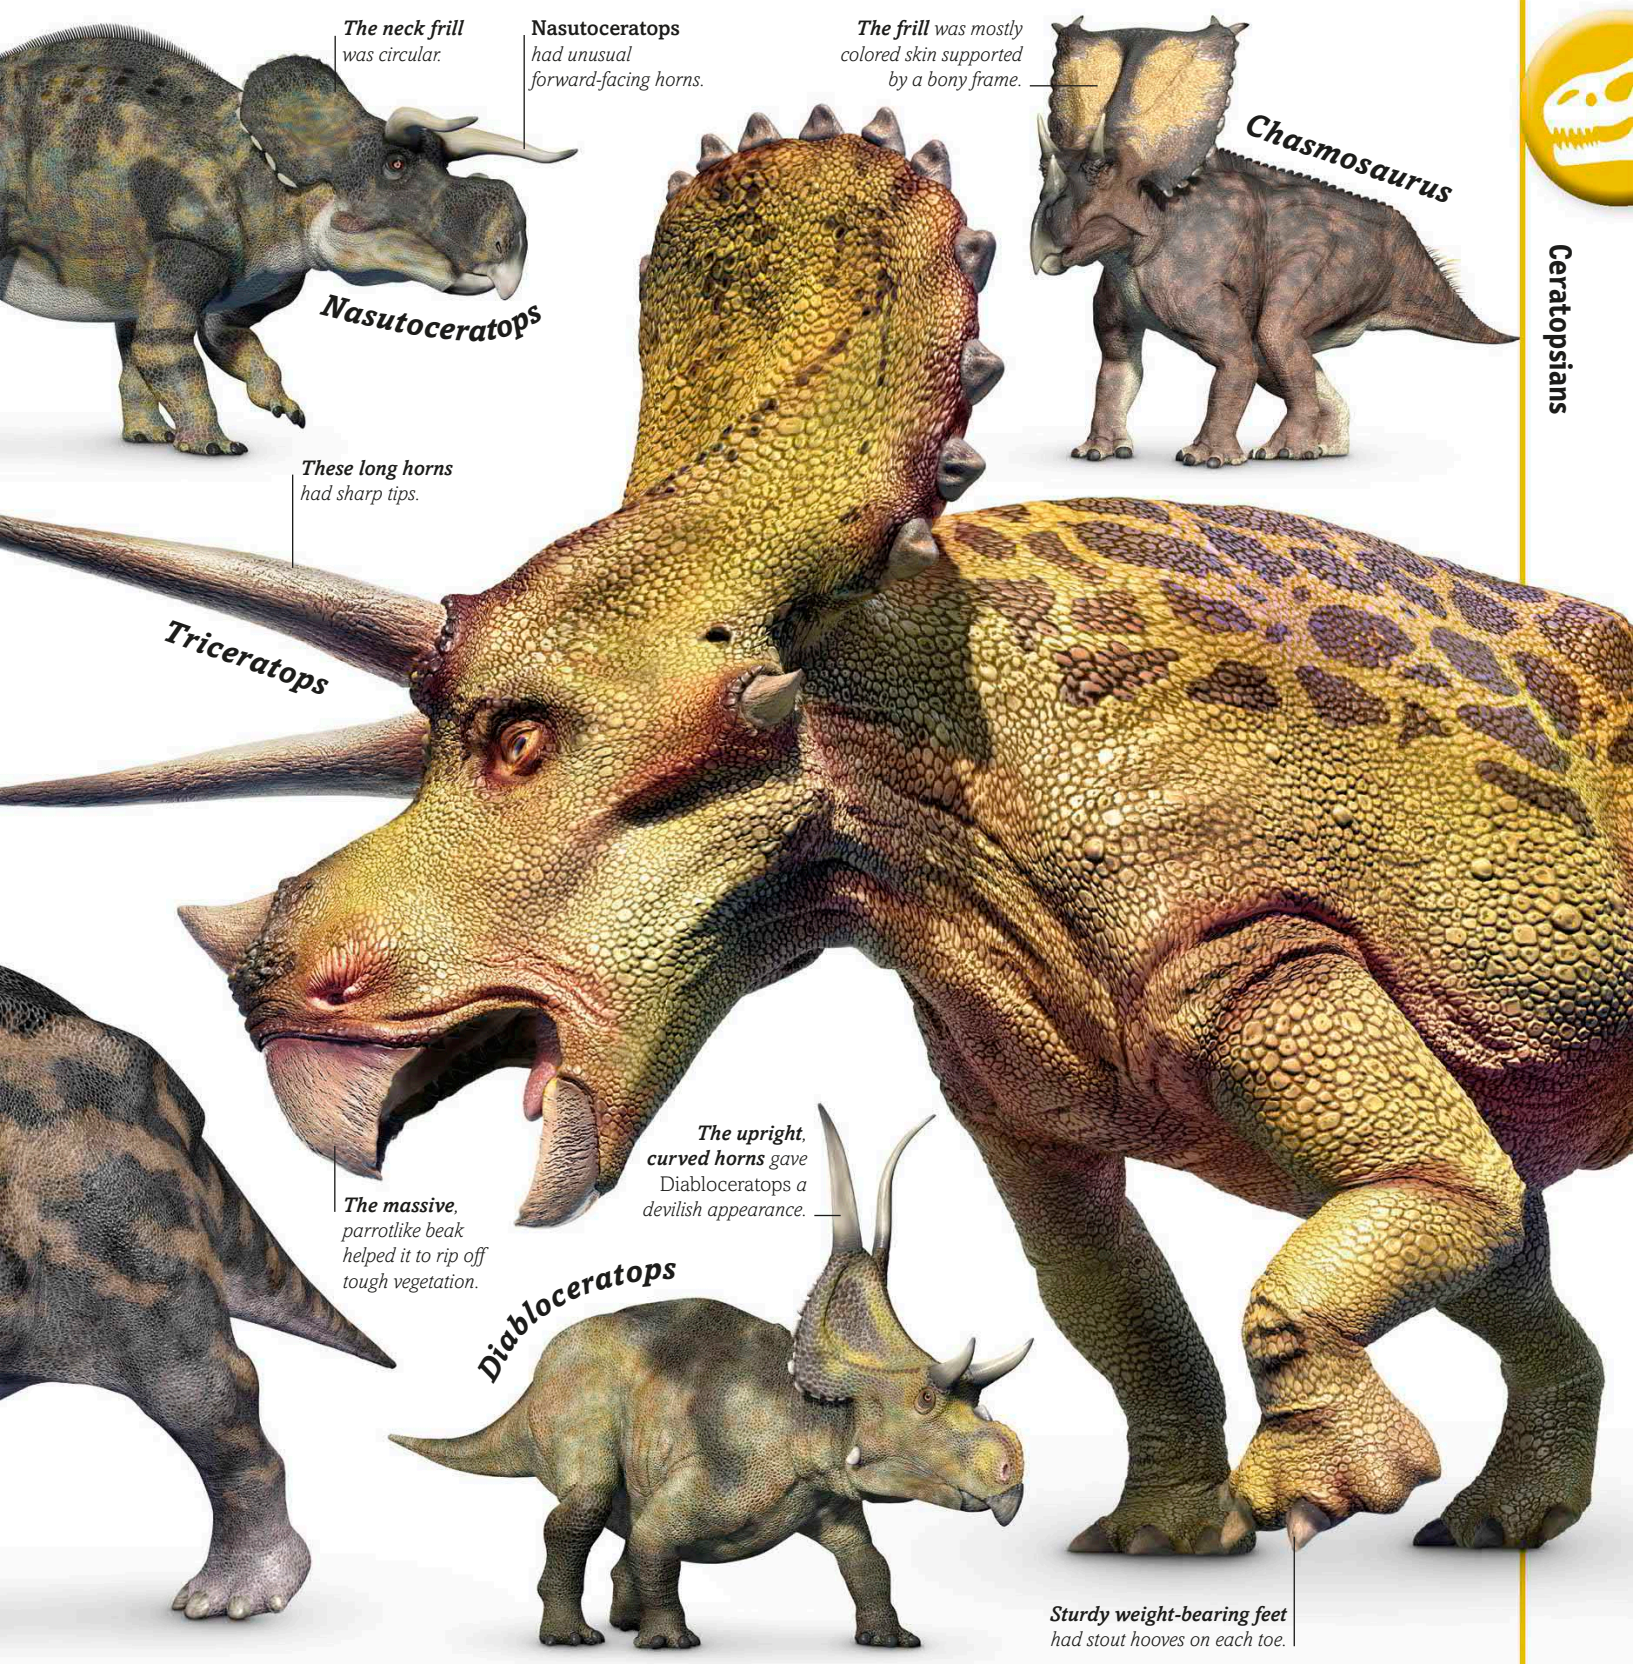

feet to support their weight. The ceratopsians were plant-eaters, equipped with a grasping beak and closely packed teeth that cut through tough leaves like scissors. As with all dinosaurs, the worn-out teeth were continuously replaced by new ones, so their shearing jaws never became blunt. Ceratopsians lived in herds as a possible defense strategy against predators. Fossil evidence suggests they were common in western North America about 74–66 million years ago. *Triceratops* itself was one of the last giant dinosaurs to roam the Earth.

HEAD-TO-HEAD Armed with its enormous nose horn and magnificent spiky frill, Styracosaurus would have been an impressive sight. The size and weight of a rhinoceros, it roamed the forests of North America about 75–74 million years ago, feeding on low-growing plants. Its large frill covered the back of its neck, while six long spikes flared out from the frill.

Styracosaurus lived in the same region and time as the tyrannosaurs *Gorgosaurus* and *Daspletosaurus*—both formidable predators that would have seen it as potential prey. If attacked, *Styracosaurus* may have defended itself with its stout, sharp nose horn. But the dramatic crown around its frill would have had little defensive value, and it probably evolved to impress other dinosaurs of its own species. Males may have competed for territory and mates just like modern bison and deer, and the male with the most imposing array of horns would have had few challengers. But if two rivals were closely matched, they may have fought in head-to-head combat until one backed off in defeat.

Herds and packs

***Corythosaurus* alarm call**

Corythosaurus *may have used air passages* *in its crest to make booming calls.*

***Attacked from behind**, the horned* Centrosaurus *didn't stand a chance of escaping.*

***Lythronax* pack hunting**

A bone bed of **thousands** of *Centrosaurus* fossils show they may have lived in a herd.

Dinosaurs did not live alone. We know from their fossilized footprints that many traveled in big groups, especially giant sauropods and other plant-eaters. Living in a herd had many advantages for herbivores like ***Corythosaurus***; some animals could concentrate on eating while others kept watch and sounded the alarm if danger threatened. Vulnerable animals could also be protected by several adults, and a dinosaur in a herd was less likely to be targeted than an animal on its own. Some meat-eaters may also have

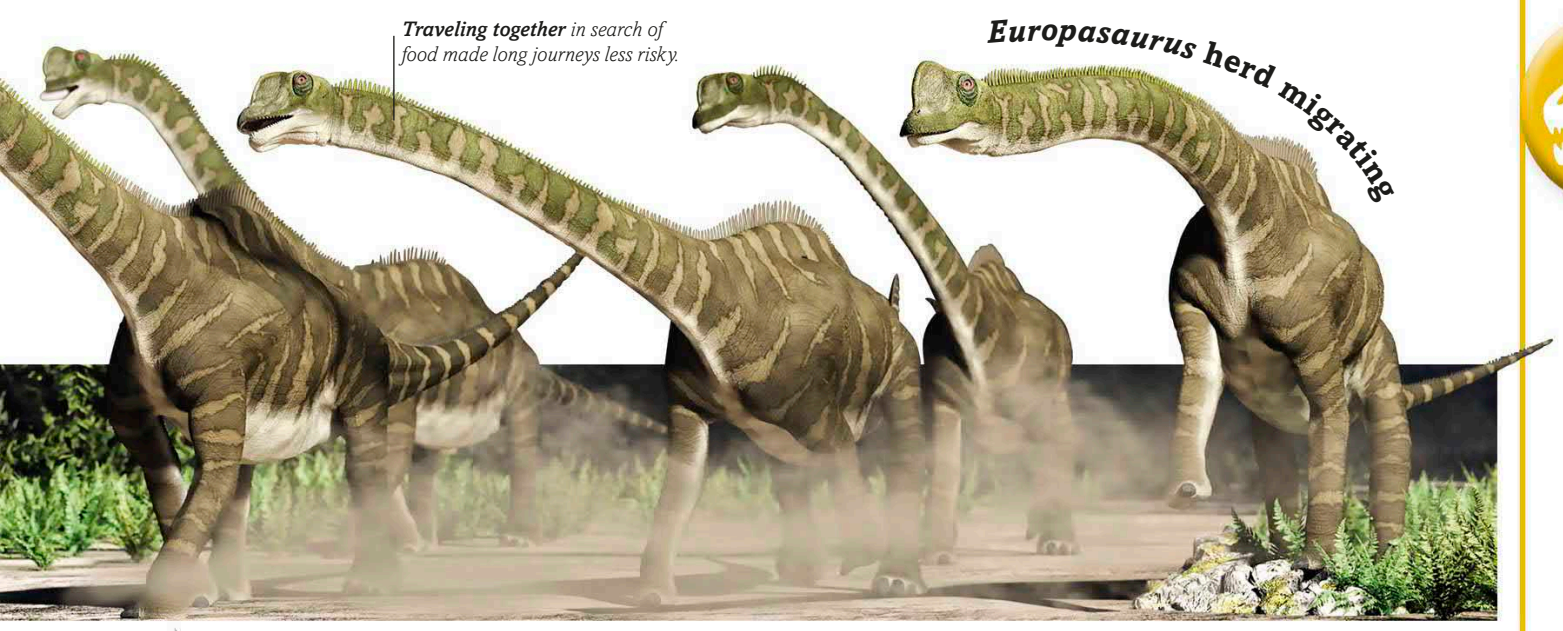

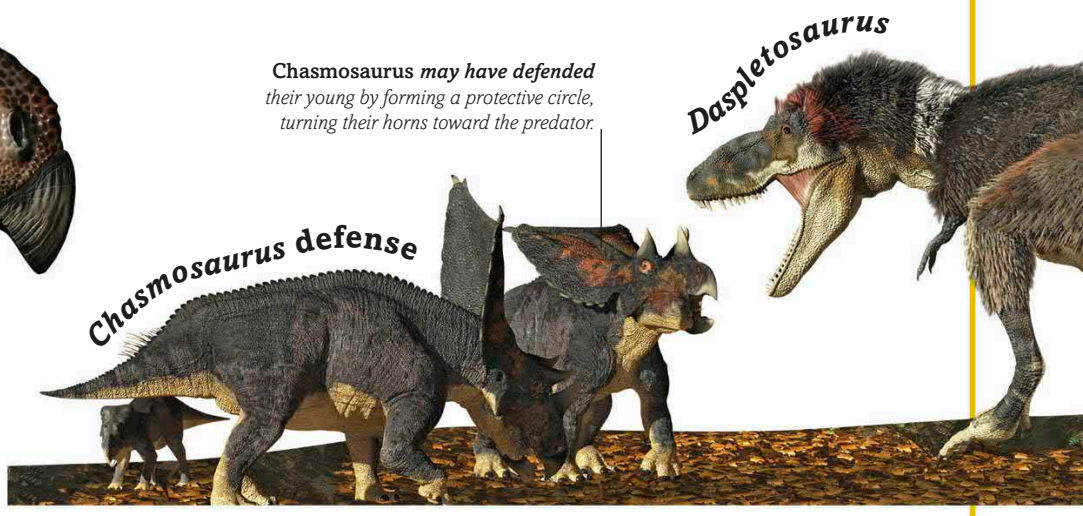

lived in groups. While big tyrannosaurs such as ***Daspletosaurus*** probably hunted alone, smaller ones like ***Lythronax*** may have joined forces to bring down larger prey. Several skeletons of the wolf-sized ***Deinonychus*** have been found near the remains of the big, plant-eating *Tenontosaurus*, suggesting that they attacked it in a pack. They were almost certainly not smart enough to devise joint tactics. But they may have learned from experience that they were more likely to get a meal if they all targeted the same victim.

Early theropods

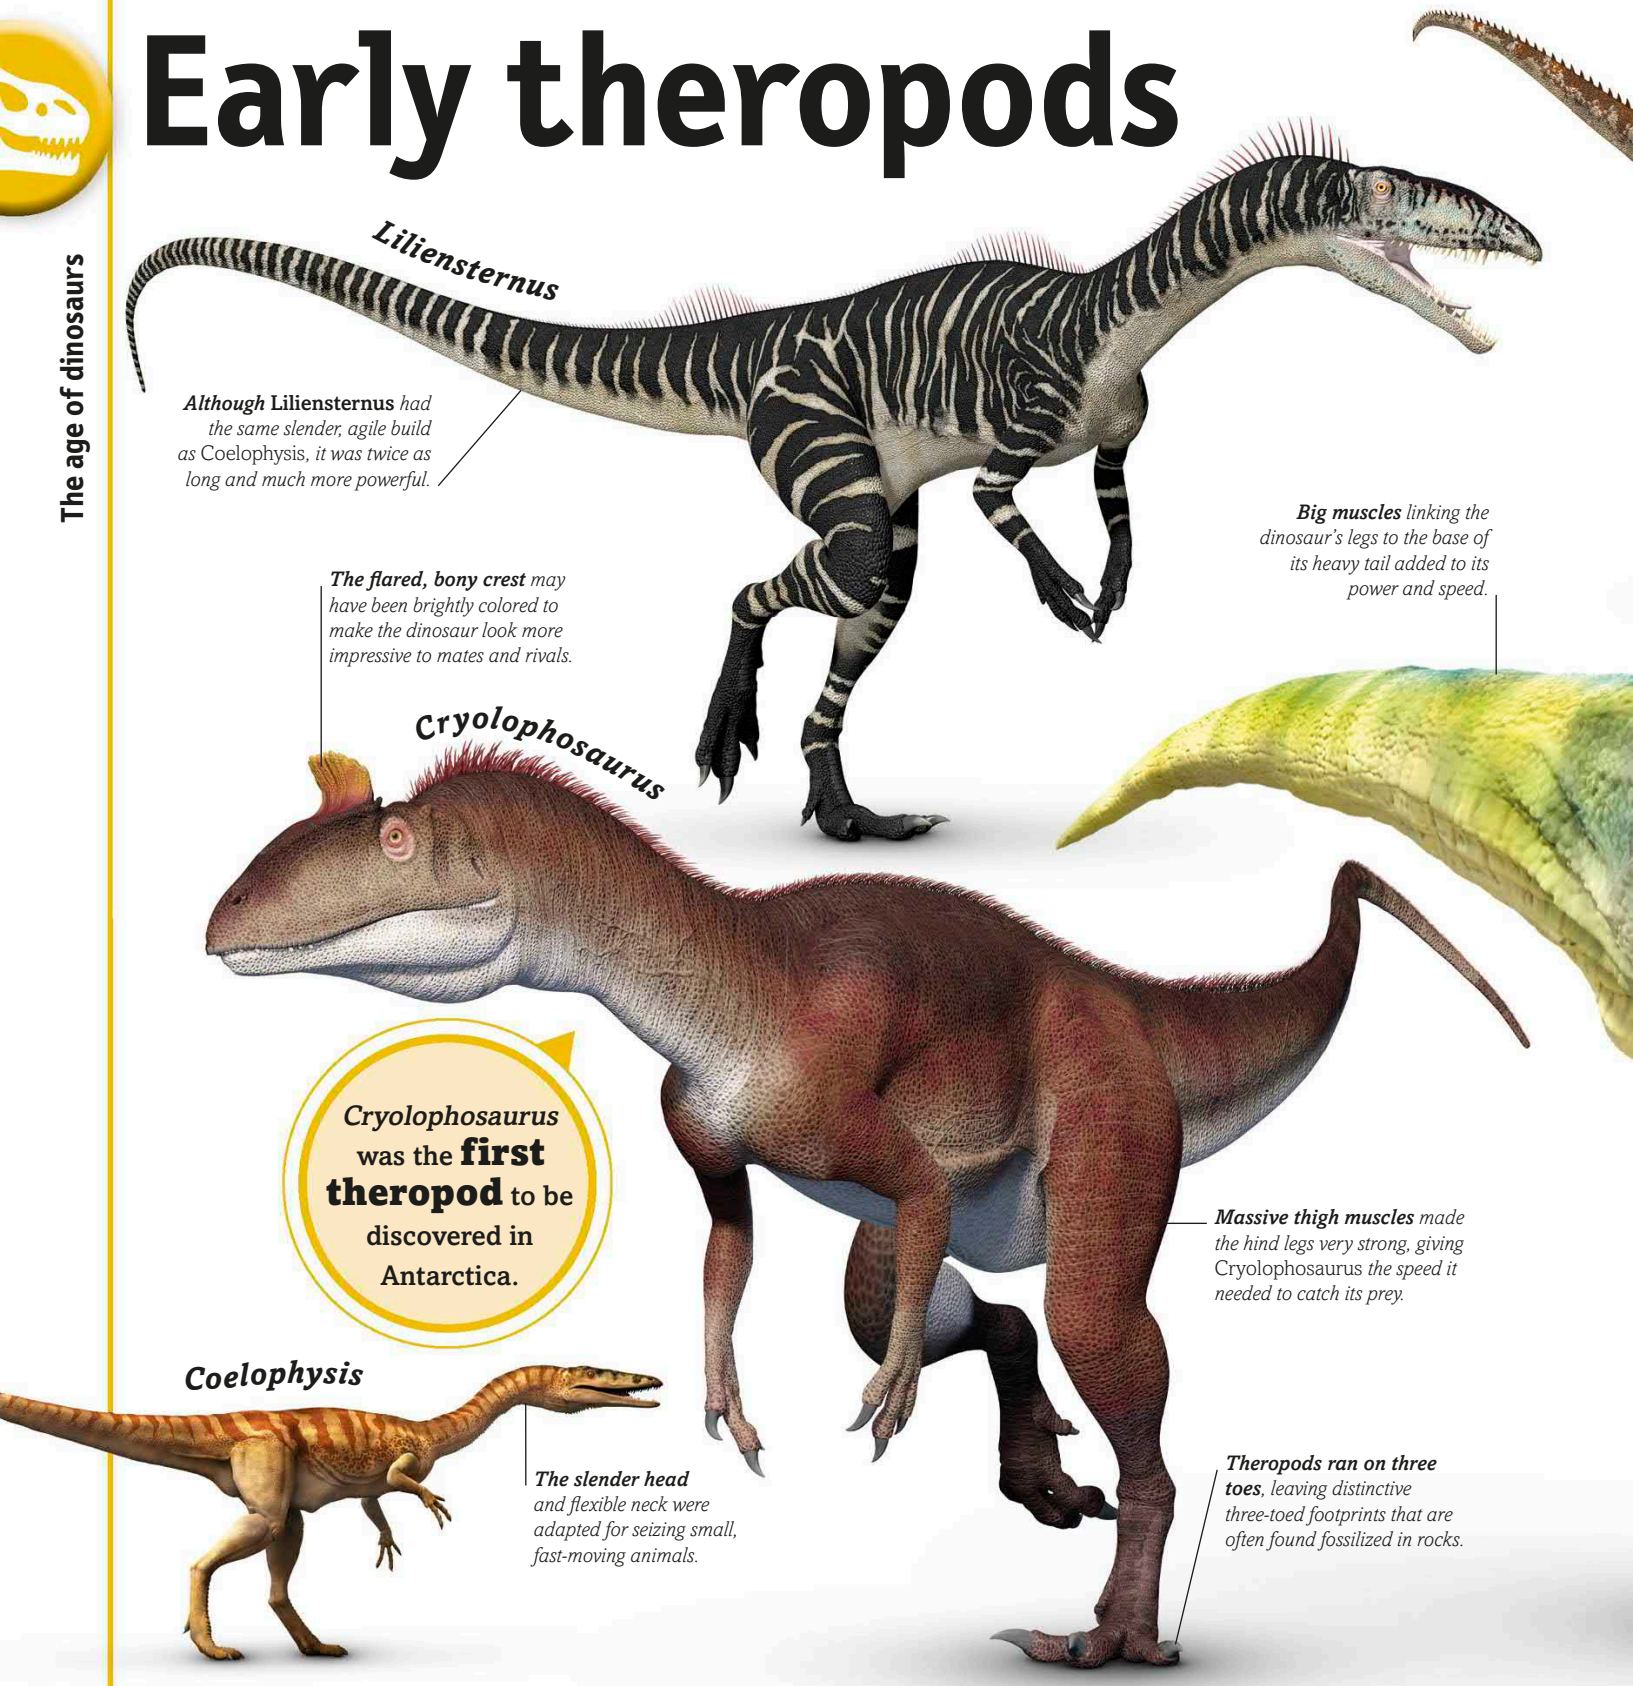

The most powerful, terrifying dinosaurs were those that hunted other dinosaurs. These predators were theropods—animals that ran on two legs, balancing their bodies and typically heavy, strong-jawed skulls with the help of their long tails. They were very successful, evolving into many different types throughout the Mesozoic Era (also known as the age of dinosaurs), and are still thriving today in the form of birds. The first theropods evolved in the late Triassic Period, about 230 million years ago, and were small, lightly built animals. They soon

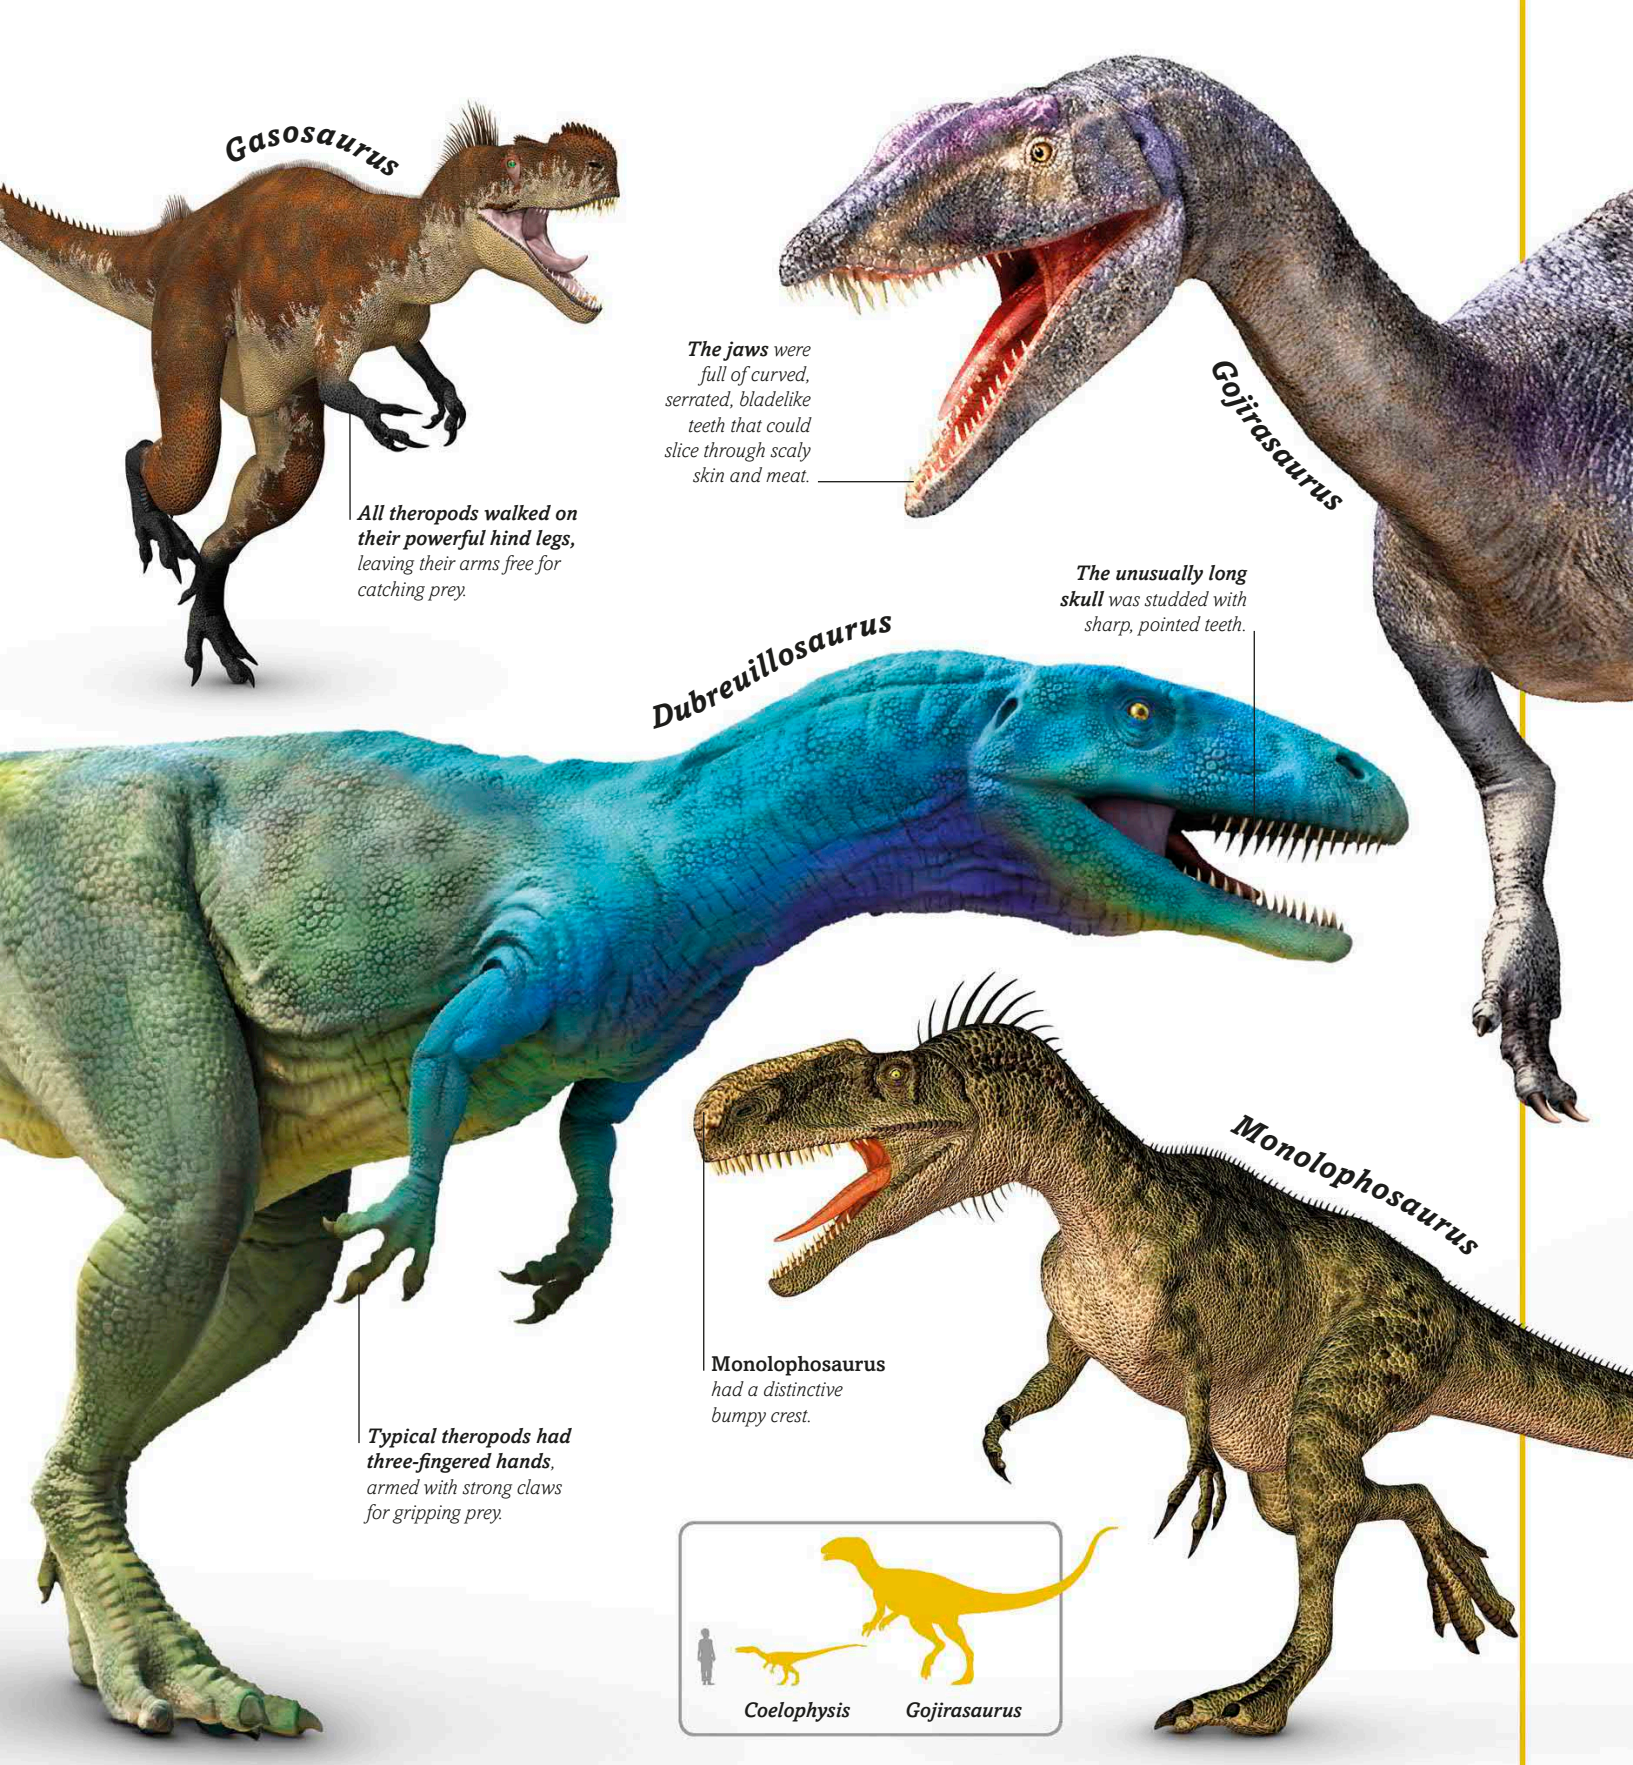

evolved into slender, agile hunters like ***Coelophysis***, one of the most successful early theropods, and its close relative, the bigger ***Liliensternus***. Meanwhile, much more powerful hunters were evolving, and by the early to middle Jurassic Period, 200–165 million years ago, there were many big, powerful theropods, including ***Cryolophosaurus*** and the horse-sized ***Dubreuillosaurus***. This period also saw the evolution of the first giant hunters, but the famous, far more heavily armed tyrannosaurs did not appear until much later.

Spinosaurids

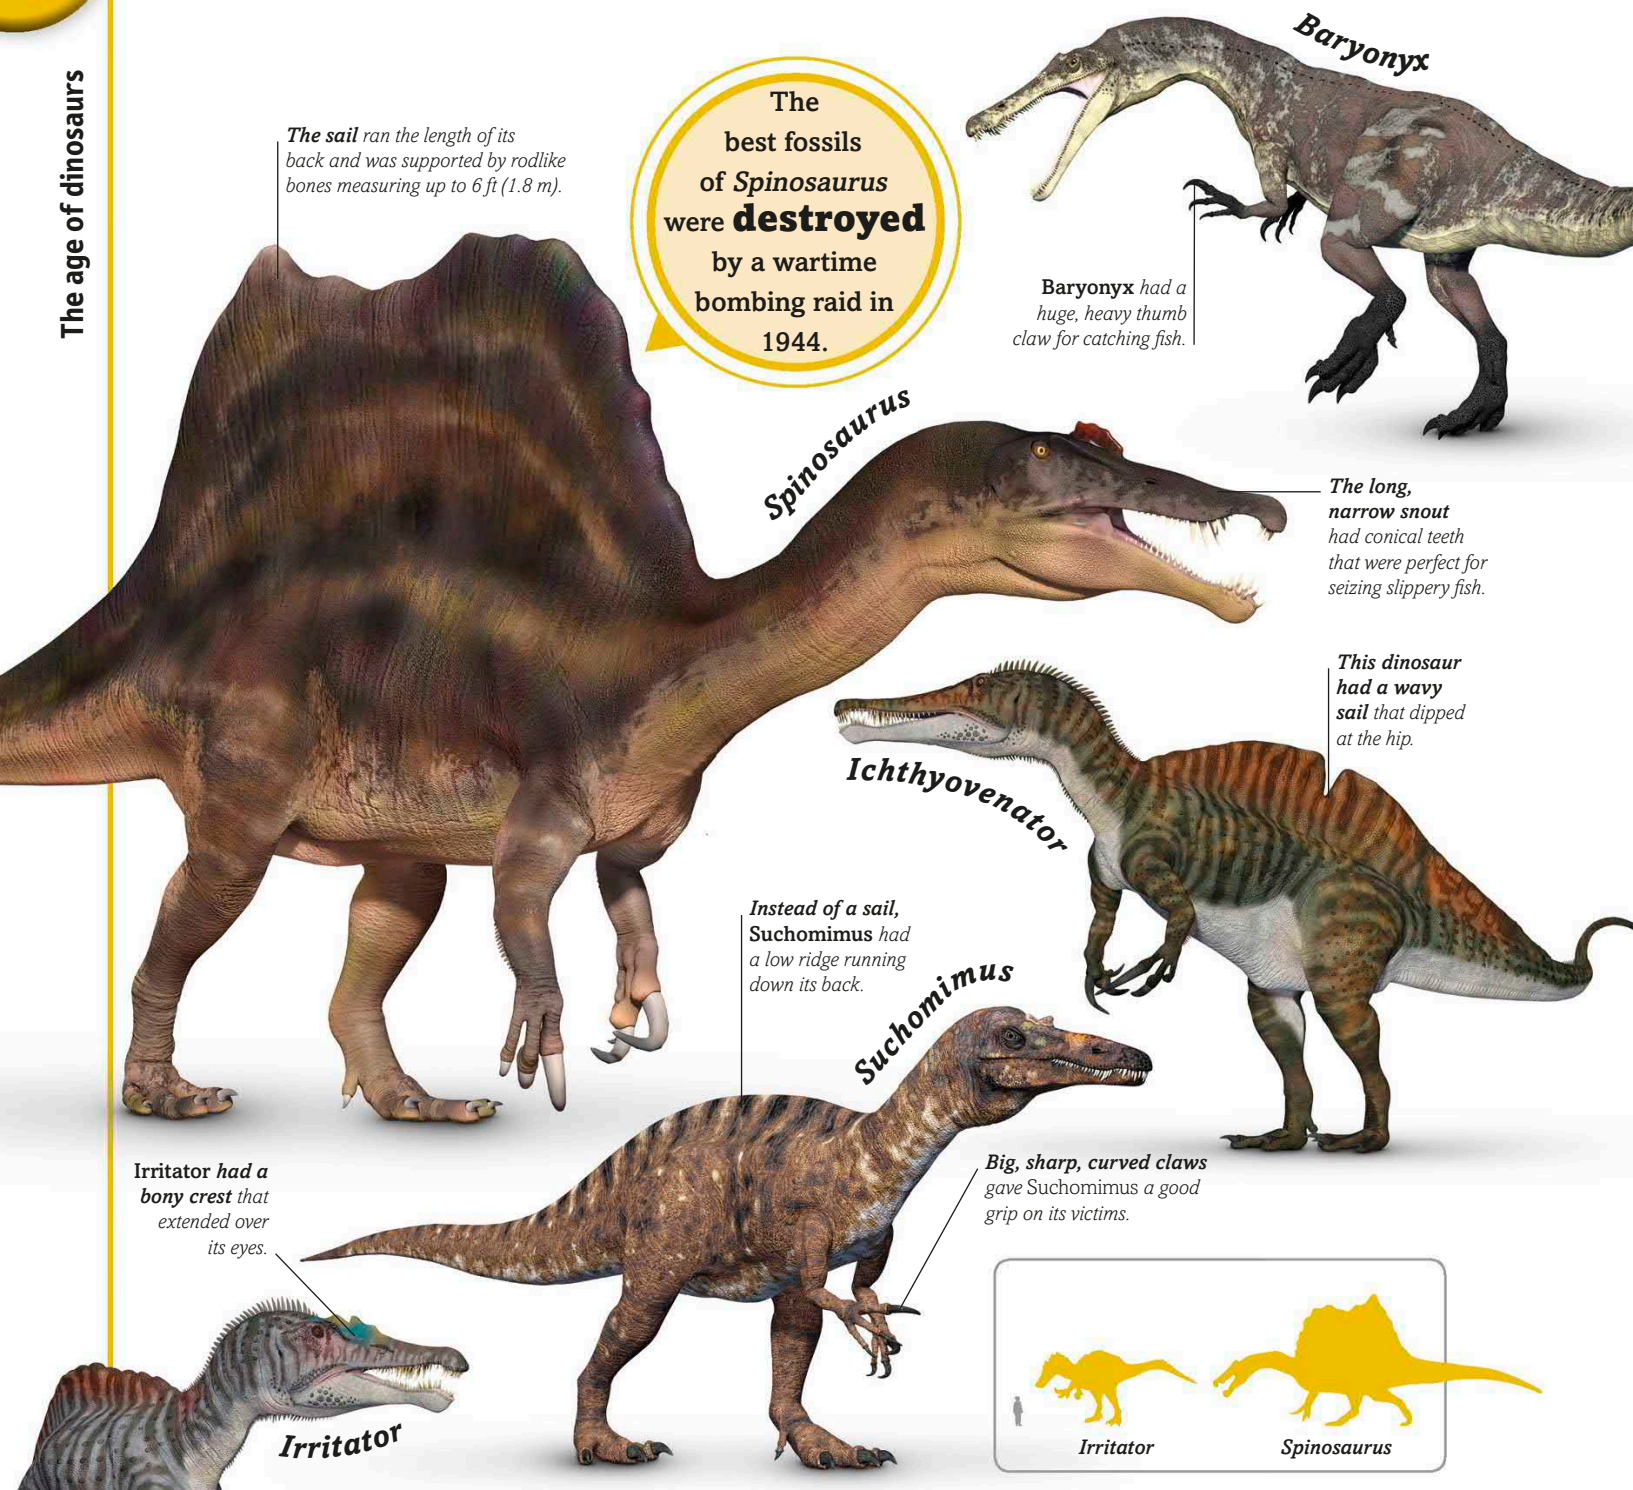

The biggest predatory dinosaur ever found is the spectacular *Spinosaurus*. At up to 46 ft (14 m) long, this large dinosaur was one of a small group of similar hunters with jaws and teeth that were just like those of a modern crocodile. It is likely that they used them in the same way—to catch big fish in shallow water. But we know that they also ate other dinosaurs, because a fossil of ***Baryonyx*** has been found with the remains of a young *Iguanodon* in its stomach.

Allosauroids

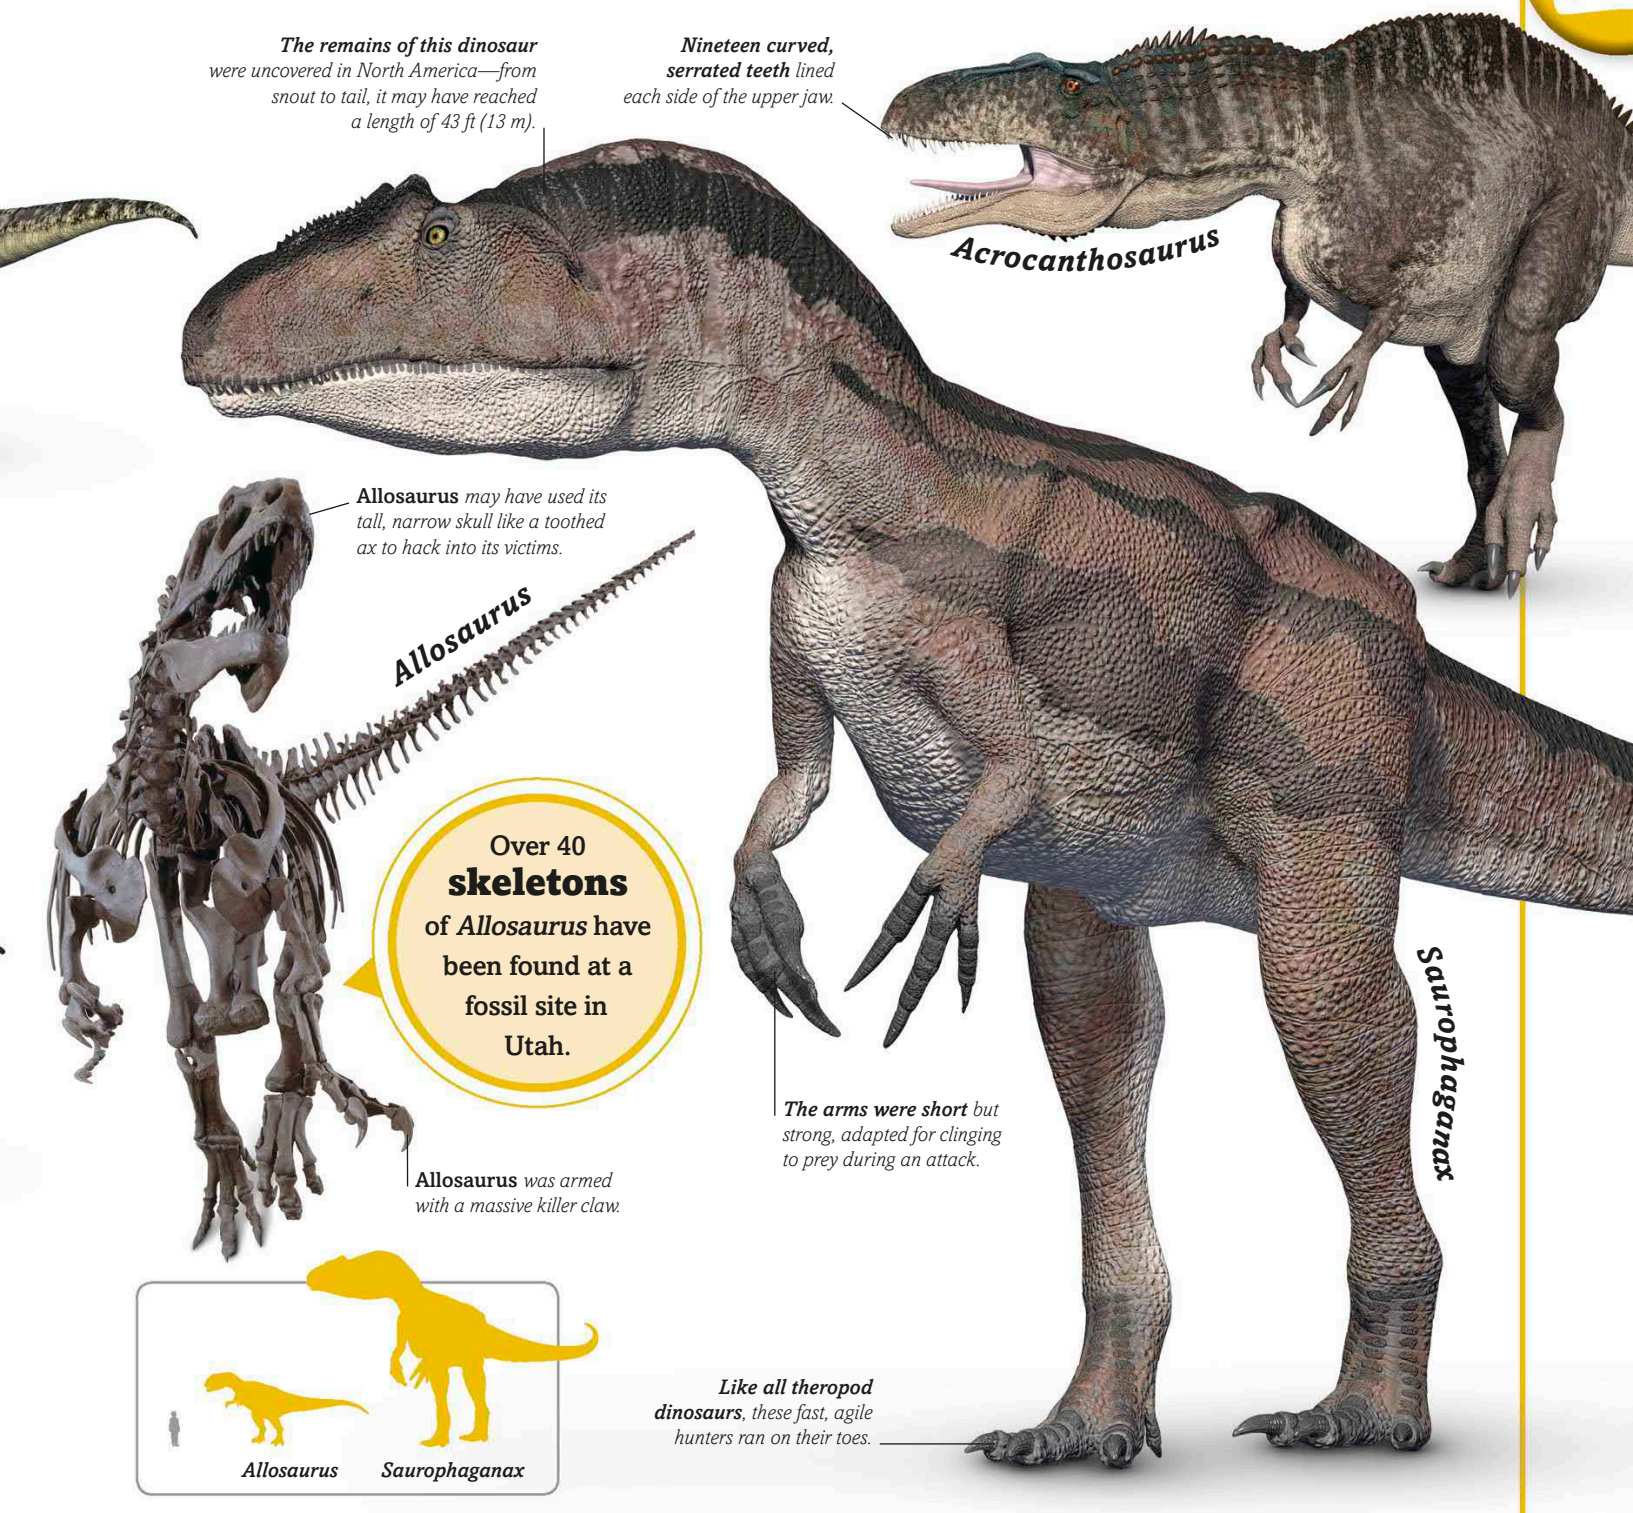

The main enemies of plant-eating dinosaurs during the Jurassic Period were fearsome hunters like *Allosaurus*. This 28 ft (8.5 m) giant had a mouthful of teeth like steak knives, ideal for slicing through flesh. Over time, even bigger predators with the same type of weaponry evolved, including the colossal ***Saurophaganax***. This heavyweight hunter would have been able to overpower gigantic sauropods like the 75-ft- (23-m-) long *Apatosaurus*, whose fossils have been found in the same North American rocks.

Cutting edge

Much of what we know about dinosaurs comes from their teeth. These were constantly replaced, so they never got blunt, and came in all shapes and sizes. The teeth of typical theropods like ***Duriavenator*** clearly belong to a carnivore, or meat-eater, used both as weapons and butchering tools. They were sharp, serrated blades, ideal for inflicting slashing wounds on prey and slicing the meat from their bones. They were useless for chewing, but since meat is easy to digest, mouthfuls could be swallowed without being chewed first.

Struthiomimus

The toothless jaws were probably covered by a sharp beak.

Heterodontosaurus

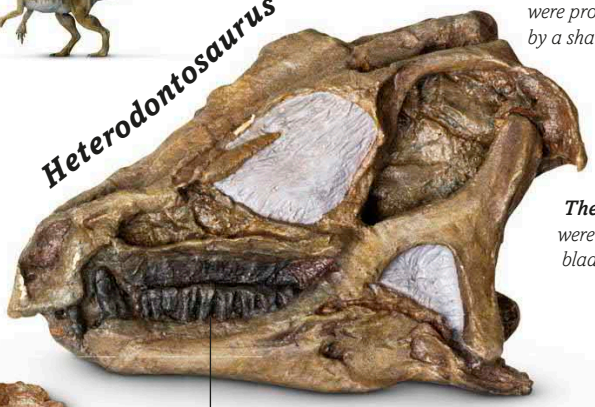

Heterodontosaurus had long canine teeth at the front but flattened chewing teeth at the back.

Tyrannosaurus

The massive, spiked teeth were stronger than the slender blades of typical meat-eaters.

These thick, strong teeth were used for cracking through bone.

The teeth were rooted in big jaw bones, strong enough to cope with struggling prey.



Daspletosaurus

Duriavenator

JAW MOVEMENT

Meat-eating dinosaurs did not have to chew their food, so their jaws did not need to move in complex ways to grind their teeth together. But the jaws did need to be strong—especially those of bone-crunching tyrannosaurs, which were equipped with huge muscles to give them a massively powerful bite.

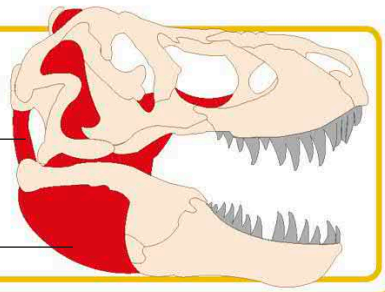

These small muscles opened the jaw.

The jaw was snapped shut by very big muscles.

Different types of teeth suited different types of prey. ***Velociraptor*** had bladelike teeth, ideal for attacking and eating other dinosaurs, but the pointed teeth in the jaws of ***Baryonyx*** were adapted for catching slippery fish. The massive spikes of ***Tyrannosaurus*** were perfect for biting through bone, while the birdlike ***Struthiomimus*** had no teeth at all. It may have eaten plants, small animals, or both. Unusually, ***Heterodontosaurus*** had several different types of teeth, which may have enabled it to eat both animals and plants.

Tyrannosaurs

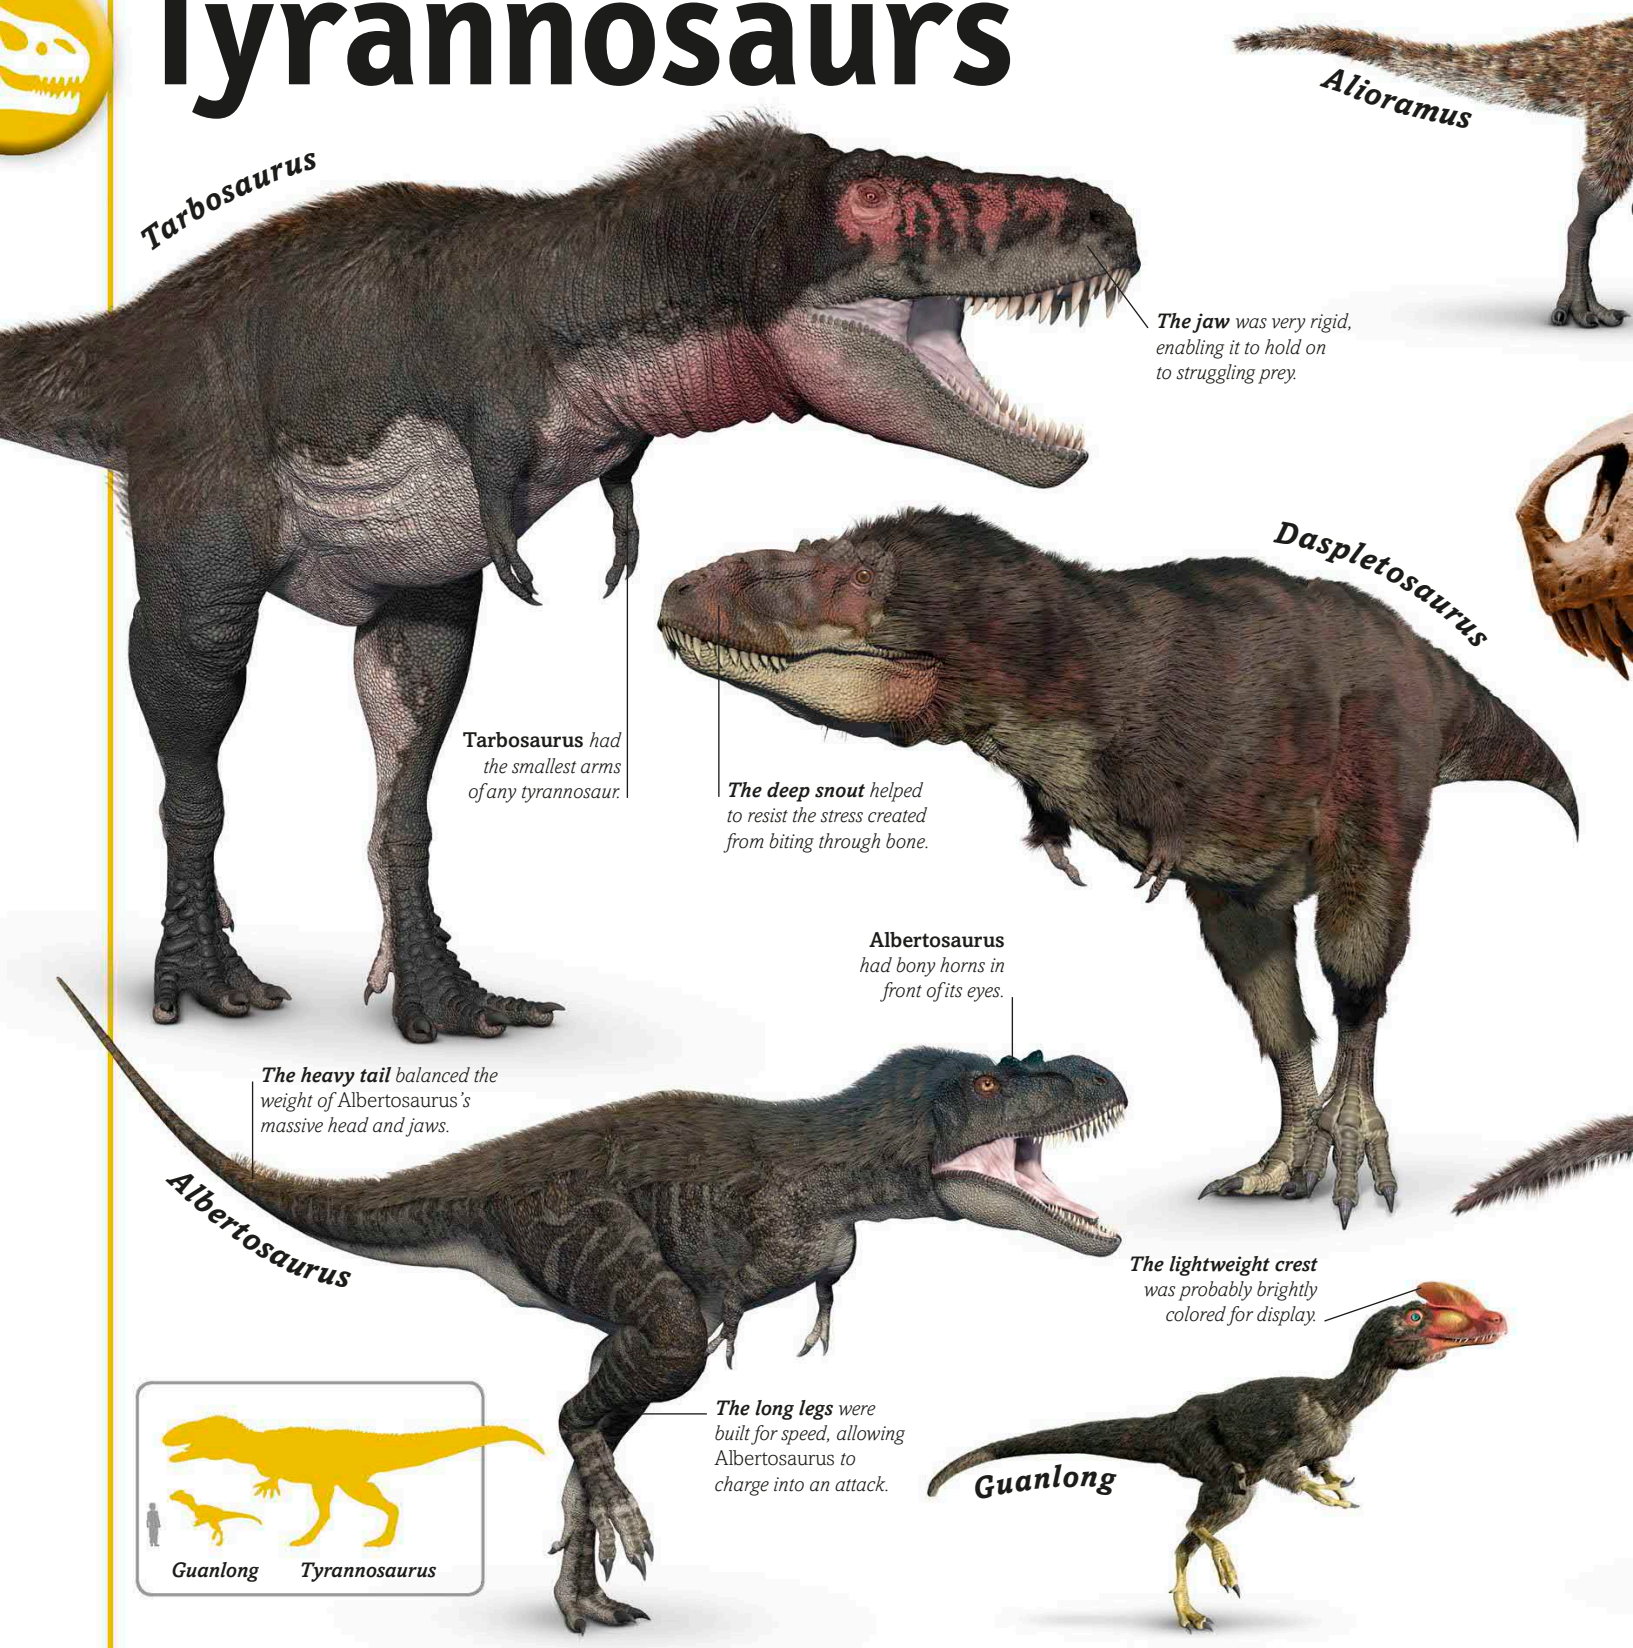

The tyrannosaurs ("tyrant lizards") were the most powerful land predators to walk the Earth. These theropods first appeared about 160 million years ago and thrived until the age of the dinosaurs came to an end 66 million years ago. The biggest of them all was ***Tyrannosaurus***—the ultimate heavyweight killer. Their weapons were their specialized teeth. Unlike other theropods, which had mouths full of sharp but fragile, knifelike teeth, the tyrannosaurs had stout spikes backed by powerful jaw muscles. This gave them the strength to bite straight

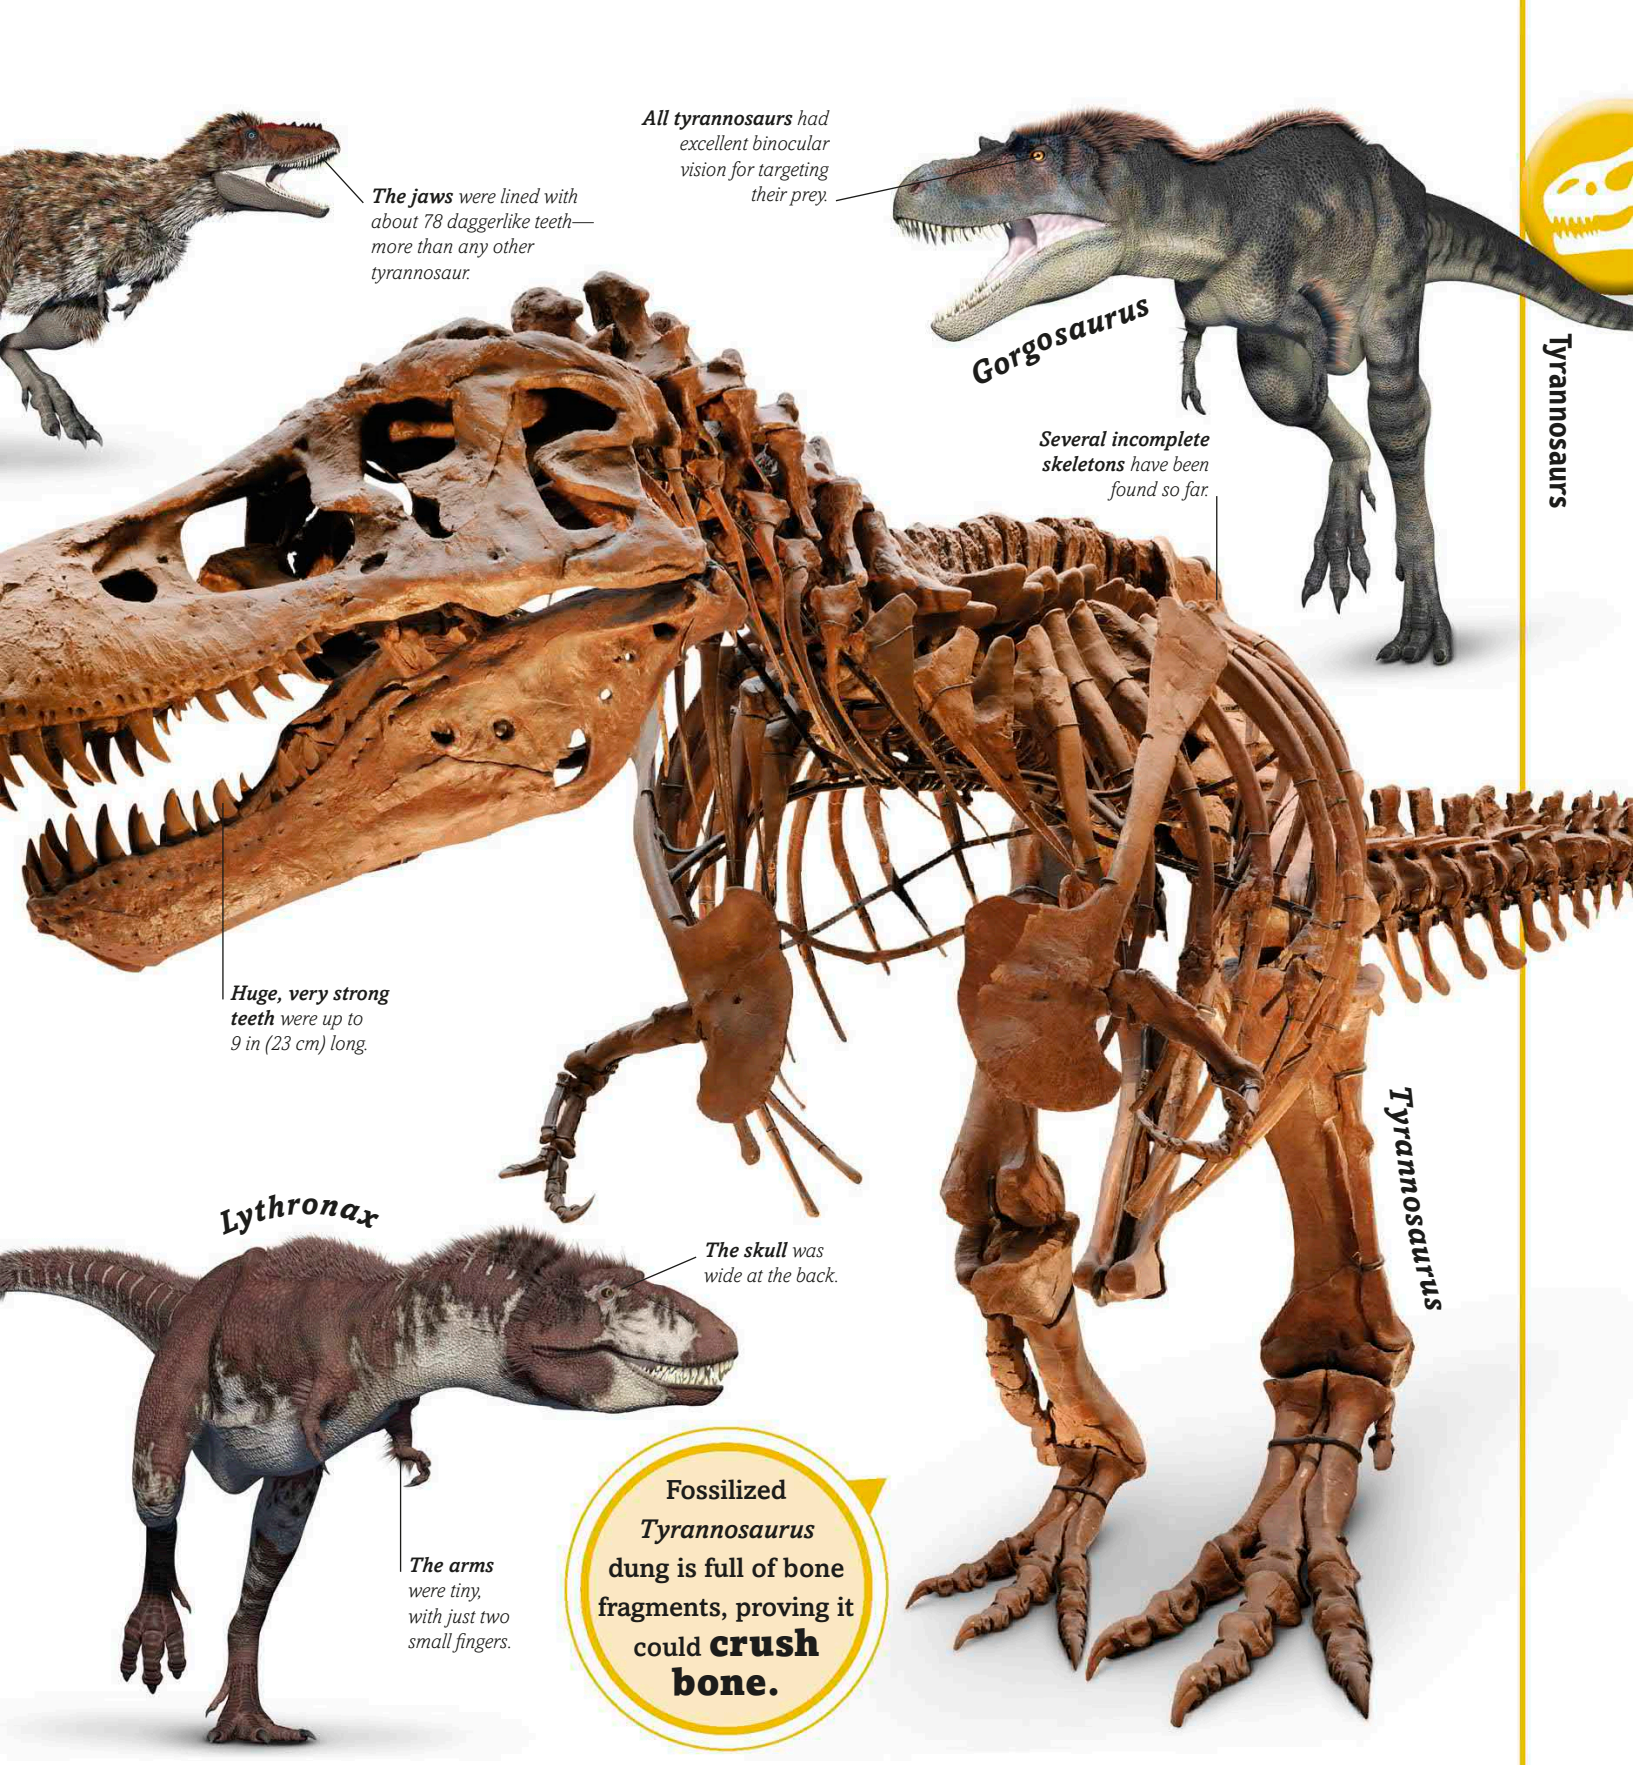

Fossilized *Tyrannosaurus* dung is full of bone fragments, proving it could crush bone.

through bone and enabled them to kill armored prey that other predators dared not attack. Their jaws were so deadly that they did not need strong hands to grip their victims, and their arms were tiny compared to their long, muscular legs. Some of the earlier tyrannosaurs were more lightly built, including ***Alioramus*** and ***Lythronax***, while others like ***Guanlong*** had crests on their heads. But all the ones that came later had a similar body structure—massive heads with a huge set of jaws mounted on a pair of powerful legs.

ULTIMATE HUNTER

Tyrannosaurus was one of the last of the giant dinosaurs, and one of the most lethal. Armed with huge bone-crushing teeth and immense jaws that could inflict crippling bites, it was the top predator of its time. The strength of its bite was greater than that of almost any other predator in history, enabling it to subdue even elephant-sized animals such as this *Triceratops*.

Tyrannosaurus had a simple but effective technique when it came to attacking prey—it would charge straight in, sink its teeth into its target, and use its strong jaw and neck muscles to rip away mouthfuls of flesh and bone. Stunned by blood loss, the victim would not try to struggle free. So, *Tyrannosaurus* did not need to cling on to prevent its escape. Since strong forelimbs were not needed, they were reduced to tiny arms that couldn't even reach its mouth. By contrast, its legs were built like those of a racehorse, with massive thigh muscles and long, slender lower limbs. So, despite its immense weight, *Tyrannosaurus* would have launched its attacks with deadly speed.

Ornithomimosaurs

The powerful, heavy-jawed tyrannosaurs had some close relatives that could hardly look less like them—the ornithomimosaurs. These included animals like ***Struthiomimus***, which means "ostrich mimic," and they certainly resembled ostriches in many ways. Most ornithomimosaurs had small heads with toothless beaks; long necks; winglike arms with fluffy feathers; and long, muscular back legs. They probably even had a similar diet of seeds, fruits, and small animals, although some had broader beaks that they may have used for dabbling in

SPEEDSTERS

Long-legged ornithomimosaurs could run very fast. Recent studies show that their biggest enemies, tyrannosaurs, could run at 19 mph (30 kph), so ornithomimosaurs probably ran faster—maybe as fast as Jamaican athlete Usain Bolt, who reached 27 mph (44 kph) in 2009.

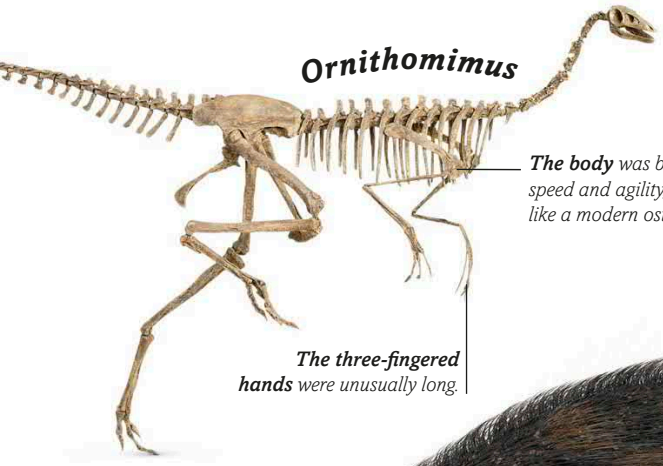

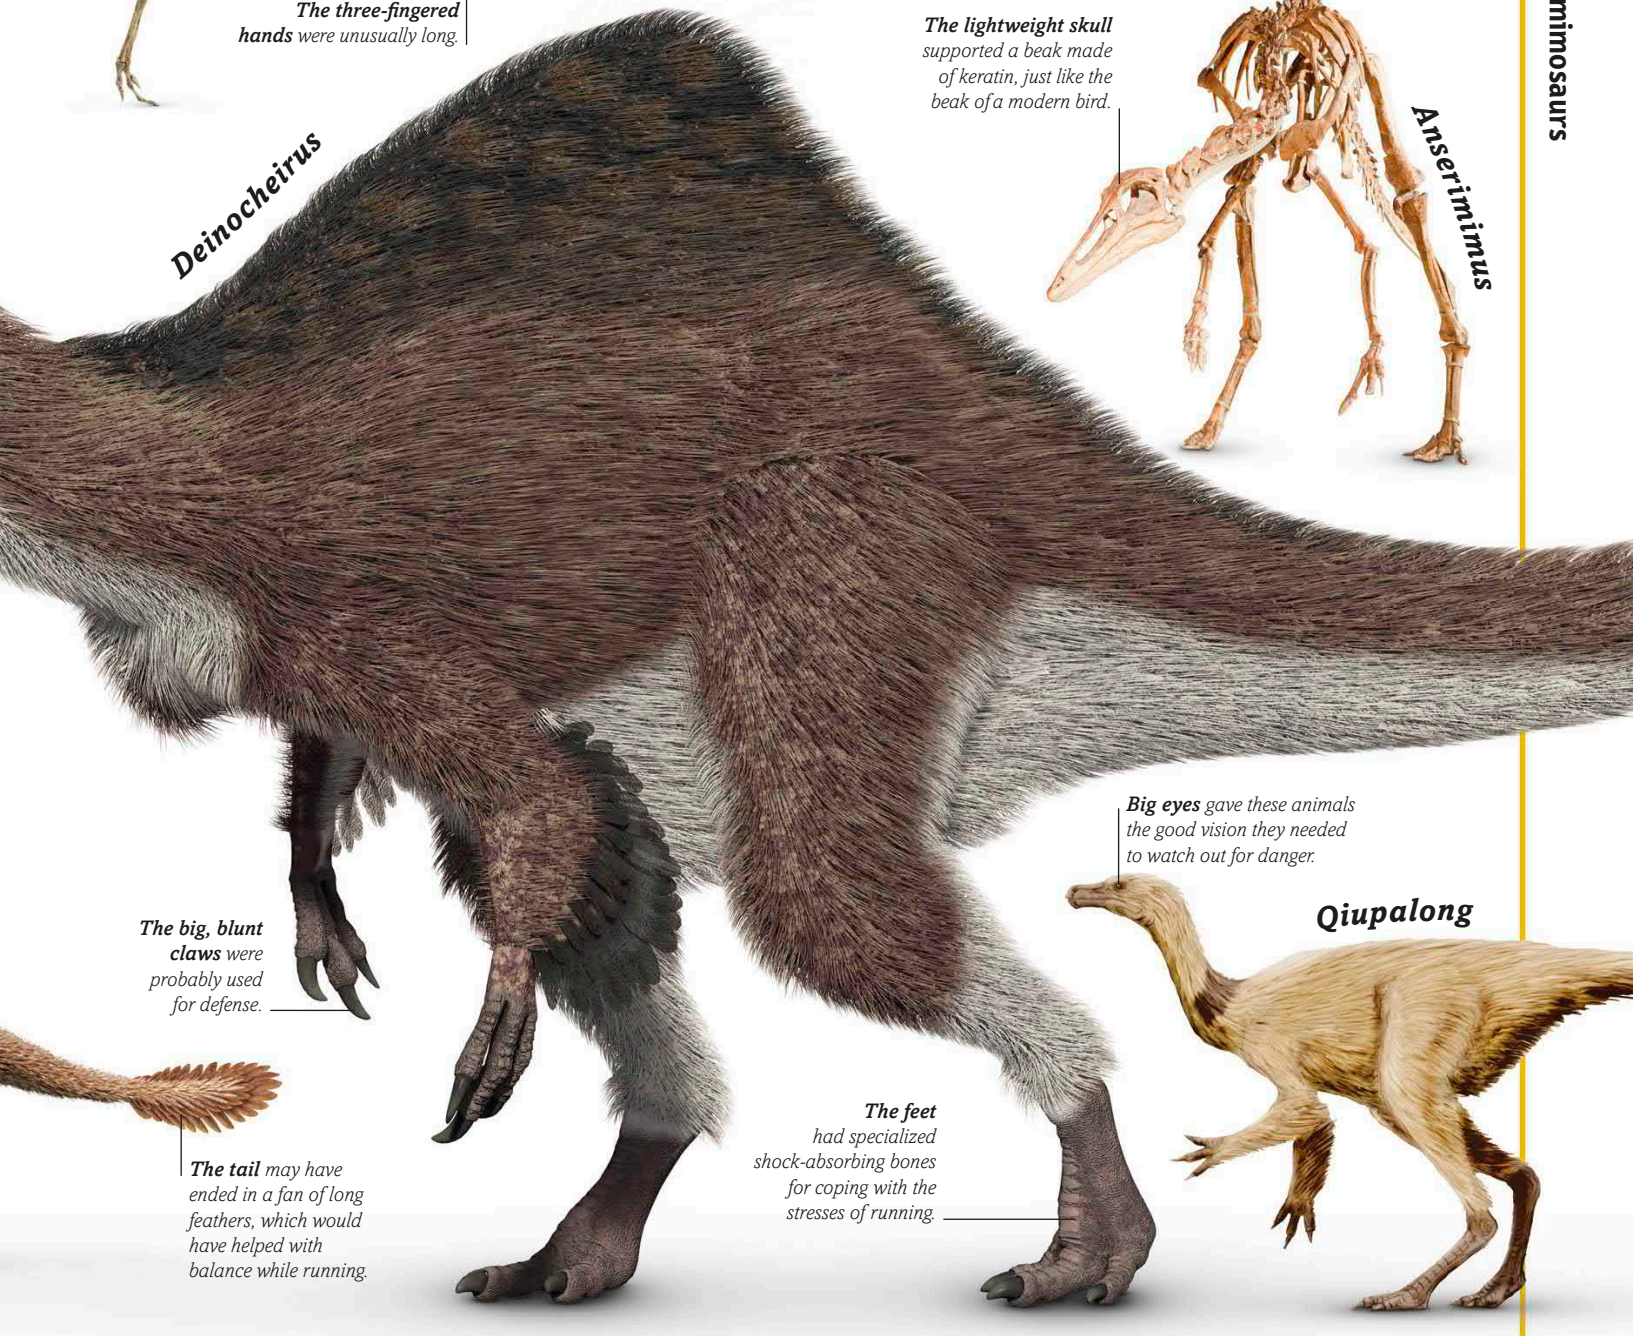

the water like ducks. But not all ornithomimosaurs were toothless or ostrich-sized. Some of the early types had jaws studded with small teeth, and some of the later ones like ***Beishanlong*** were big, powerful animals. The biggest found so far was ***Deinocheirus***, a giant that grew to 36 ft (11 m) long and had very long arms and hands. Relative to its body, it had shorter legs than other ornithomimosaurs, so it probably relied on its size and big defensive claws to discourage the powerful predators of its time and make them look for softer targets.

Oviraptorosaurs

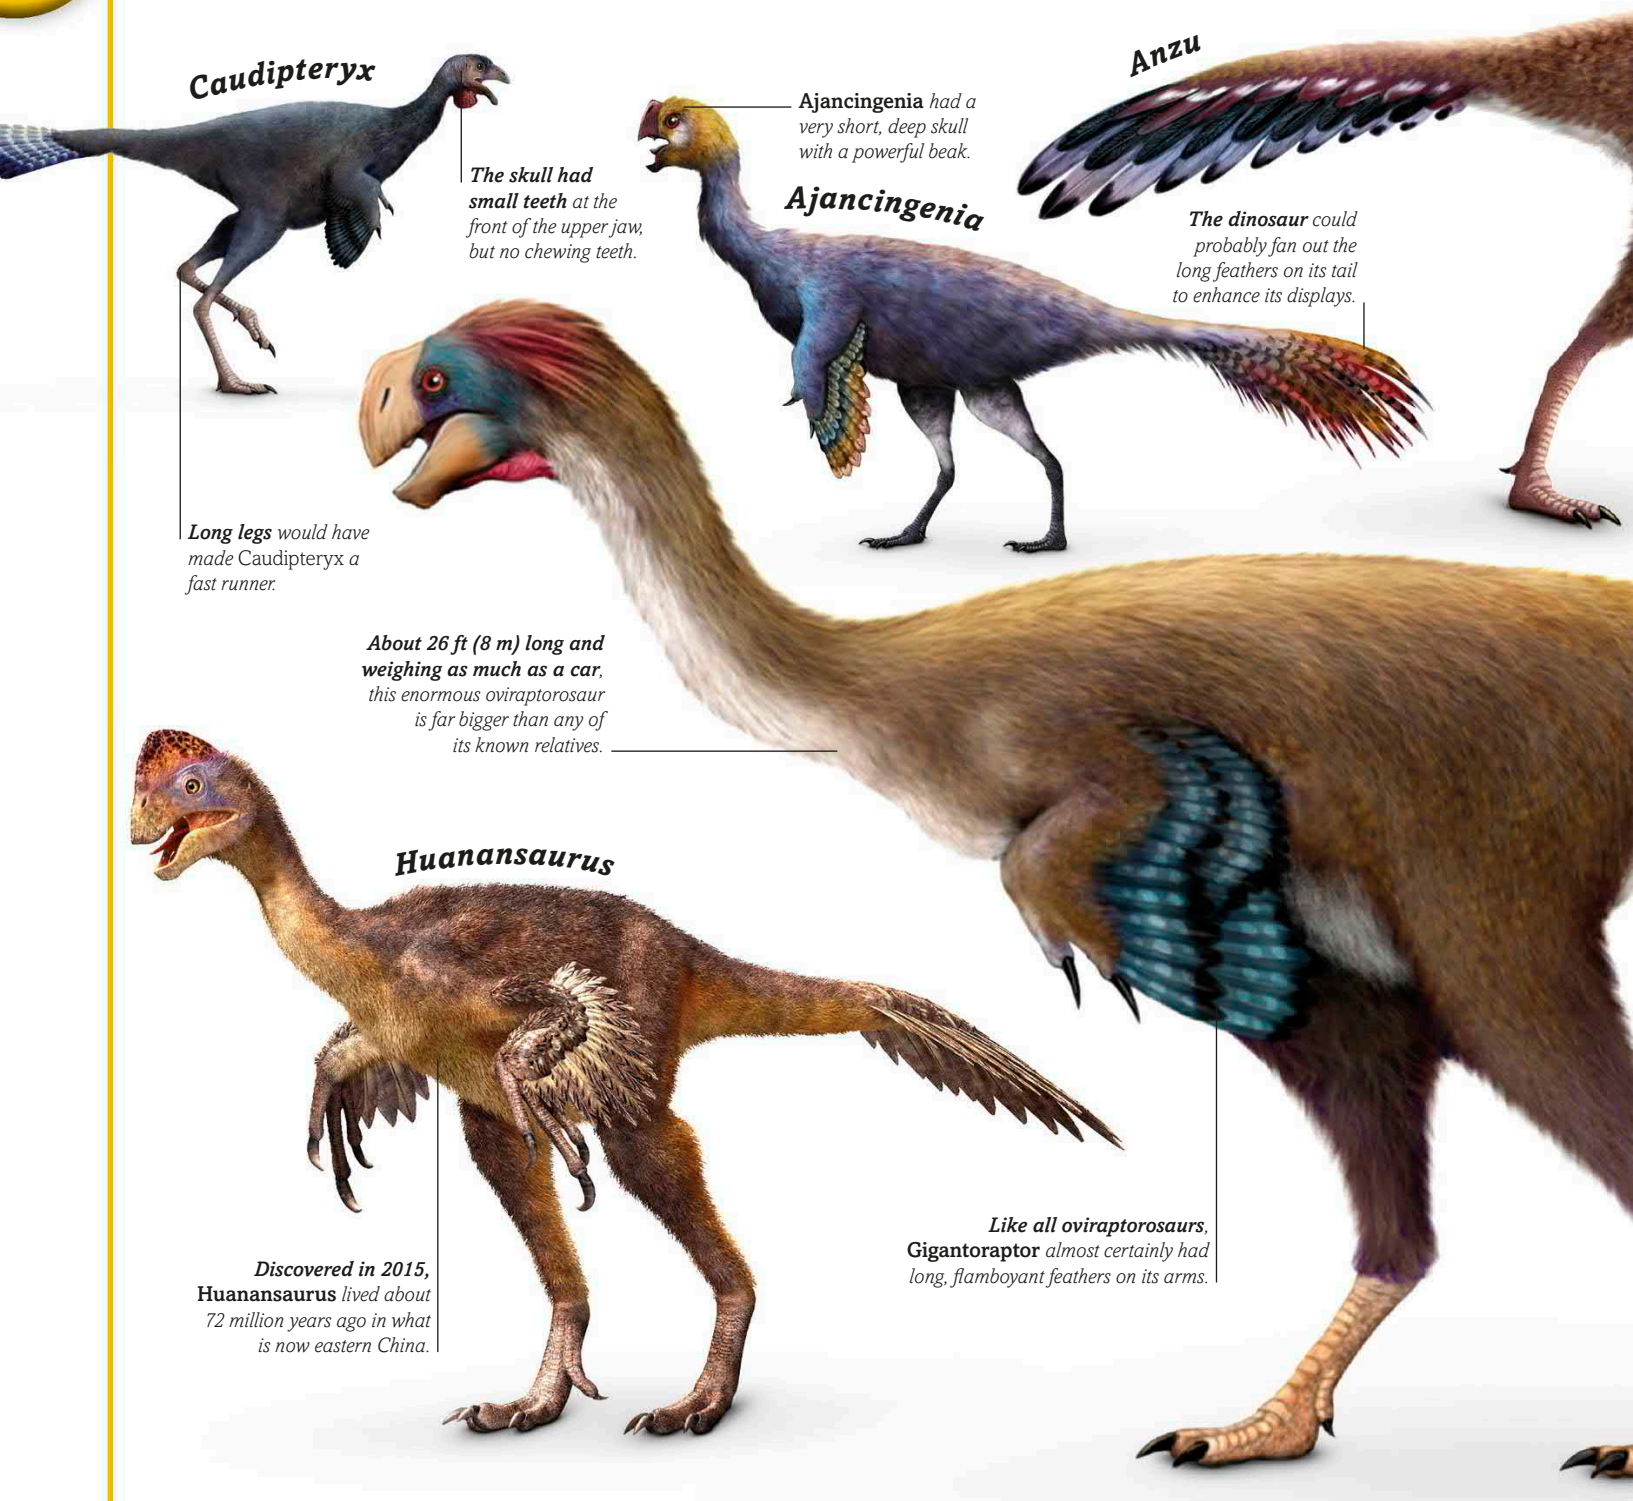

In 1923, a group of American fossil hunters in Mongolia discovered the first complete dinosaur eggs. They also found the skull of an odd-looking dinosaur close by. They assumed it was trying to eat the eggs and called the dinosaur ***Oviraptor***, which means "egg thief." Much later, in the 1990s, it became clear that the eggs were its own and that it was actually looking after them. Despite this, the name stuck and is now used to describe several animals with the same features—the oviraptorosaurs. They belonged to a group

of typically long-armed theropod dinosaurs called the maniraptorans, which also includes the birds. The maniraptorans probably all had feathery bodies and tails and long feathers on their arms. Oviraptorosaurs also had birdlike, often toothless beaks, which they may have used to gather a wide range of food, including seeds, big insects, lizards, small mammals, and possibly even the eggs of other dinosaurs. They had two bony projections on the roof of the mouth that would have been ideal for cracking eggshells, so maybe they were egg thieves after all.

Arms and hands

The arms and hands of dinosaurs evolved in different ways to perform a variety of tasks. Those of small plant-eaters were adapted for gathering food, but many, like ***Iguanodon***, used their hands to support their weight. Bigger plant-eaters had very stout forelimbs that were specialized for walking. The arms of typical meat-eaters like the powerful ***Dubreuillosaurus*** were adapted for gripping struggling prey while the predator got to work with its jaws. They were short but strong, with sharp claws. Over time, some hunters, such as ***Citipati*** and

GIANT ARMS

The enormous hands of this dinosaur earned it the name *Deinocheirus,* which is Greek for "horrible hand." The arms were 8 ft (2.5 m) long and ended in hands that were about 2½ ft (76 cm) long.

The three-fingered hand had huge, blunt claws.

Sinornithosaurus, developed much longer arms and hands. These were often used in the same way, but recent fossil evidence shows that they carried long feathers, almost like wings, and *Citipati* used these to shelter its eggs and young. Relatives of these animals had even longer feathered arms, and they became the first birds. By contrast, some very powerful hunters, including ***Carnotaurus*** and the tyrannosaurs, evolved very short arms and relied on their jaws to subdue prey.

PROTECTIVE WINGS Seventy-five million years ago, the deserts of southern Mongolia were just as dry as they are today, with extensive sand dunes and few rivers. Despite this, they were home to several dinosaurs. They included the ostrichlike *Citipati*—famous among scientists for their amazing fossils, which show that these dinosaurs incubated their eggs like birds.

Like many other theropods, *Citipati* had long arms equipped with feathers similar to the flight feathers of bird wings. But *Citipati* clearly could not fly, because its "wings" were far too short. The feathers must have had another function, and several fossils found in the Gobi Desert show what that might have been. The animals are preserved crouching on top of clutches of eggs, with their arms spread out to the edges of the nest. In this position, their long feathers would have covered the eggs, keeping them warm or shading them from the scorching desert sunshine. But feathers could not protect *Citipati* and its eggs from whatever killed, buried, and preserved them as fossils beneath the desert sand.

Therizinosaurs

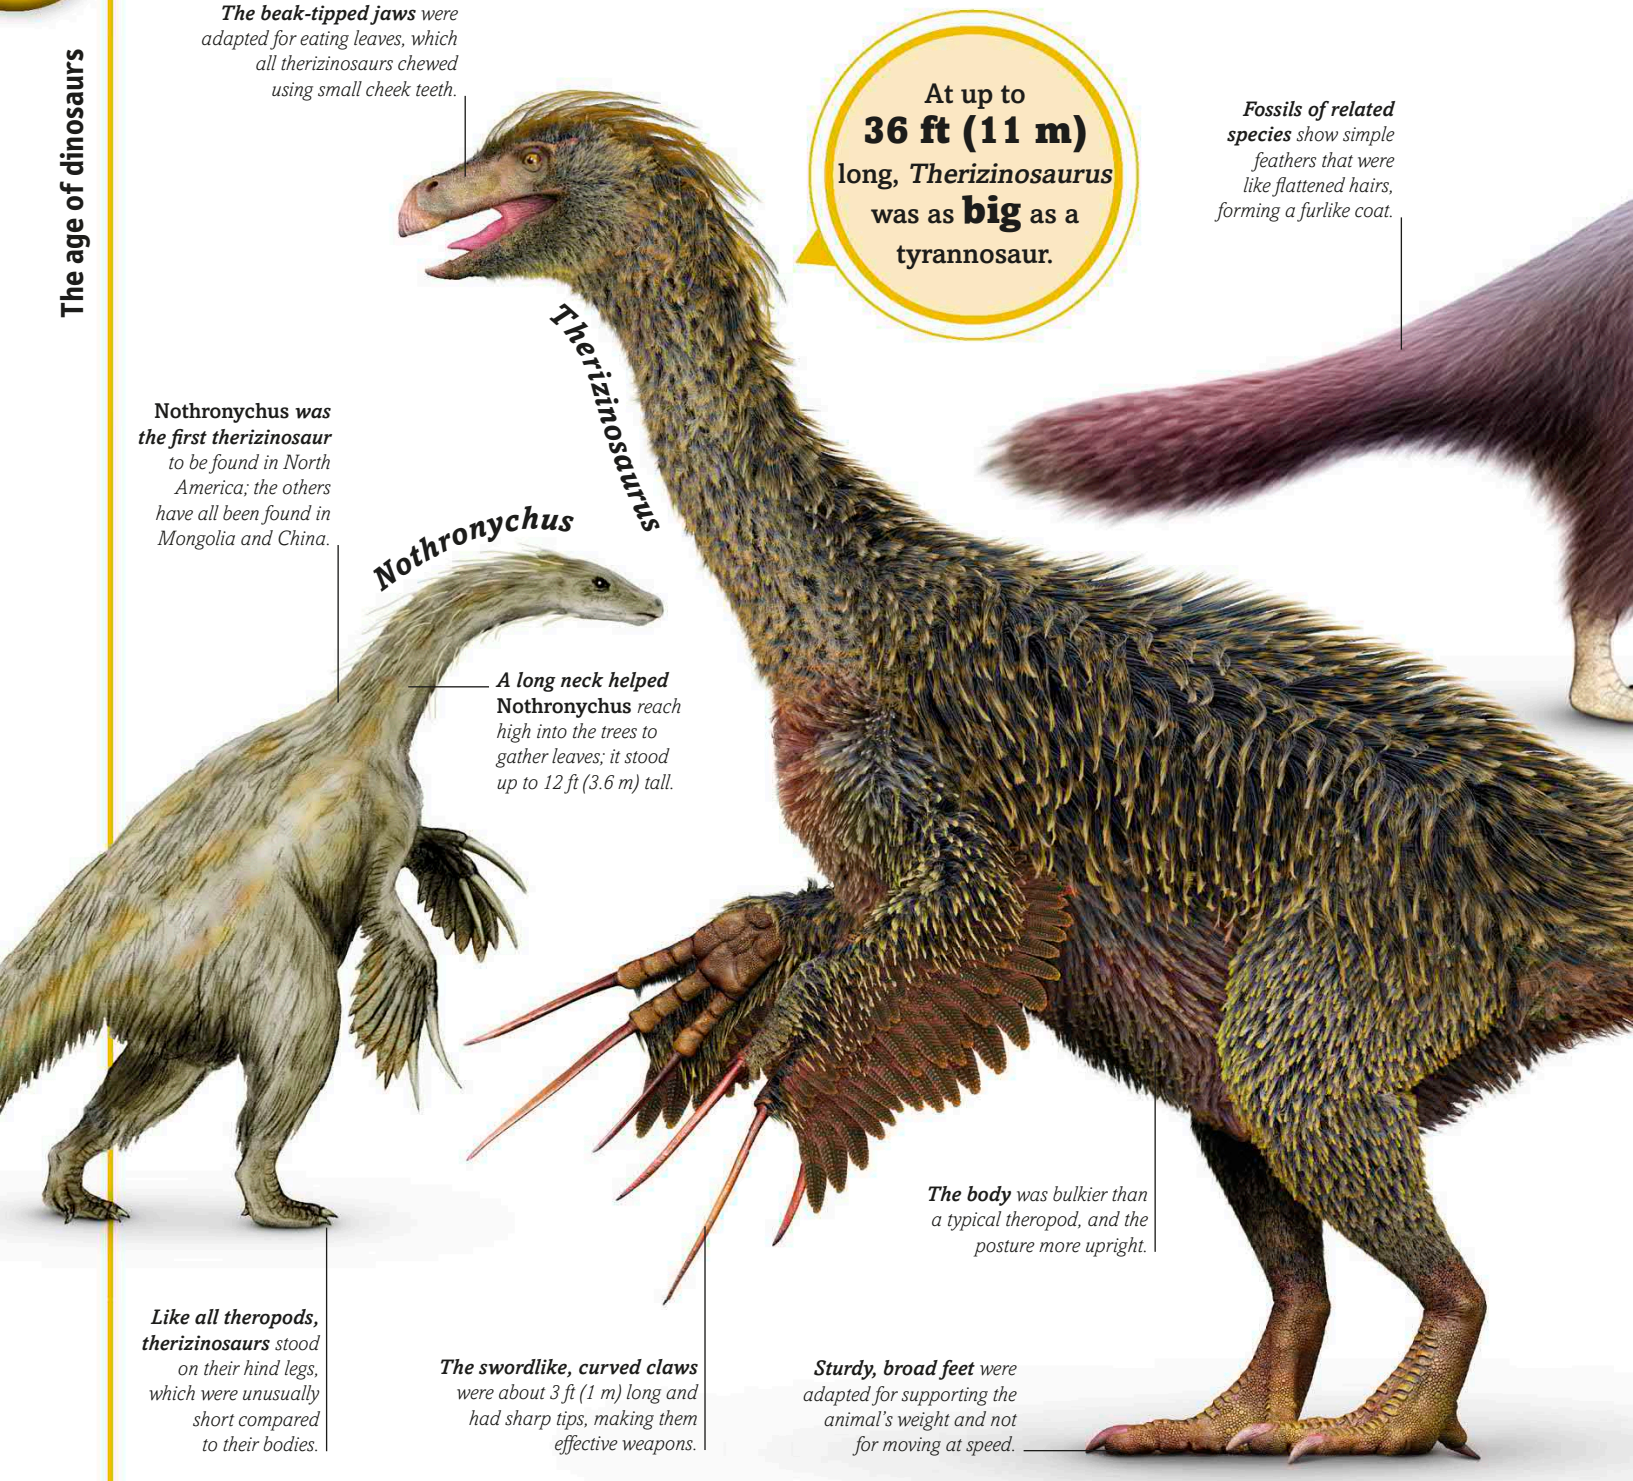

Most theropods were sharp-toothed, agile hunters, but the therizinosaurs were different. Very few complete fossils have been found, but when paleontologists pieced together the evidence, therizinosaurs turned out to be unusual. They had beaked jaws, leaf-shaped cheek teeth, and bulky bodies, suggesting that they probably fed on plants instead of hunting prey. They were long-armed members of the maniraptorans—a group of theropods related to birds—and like them, were feathered. But the feathers seem to have been reduced to slender

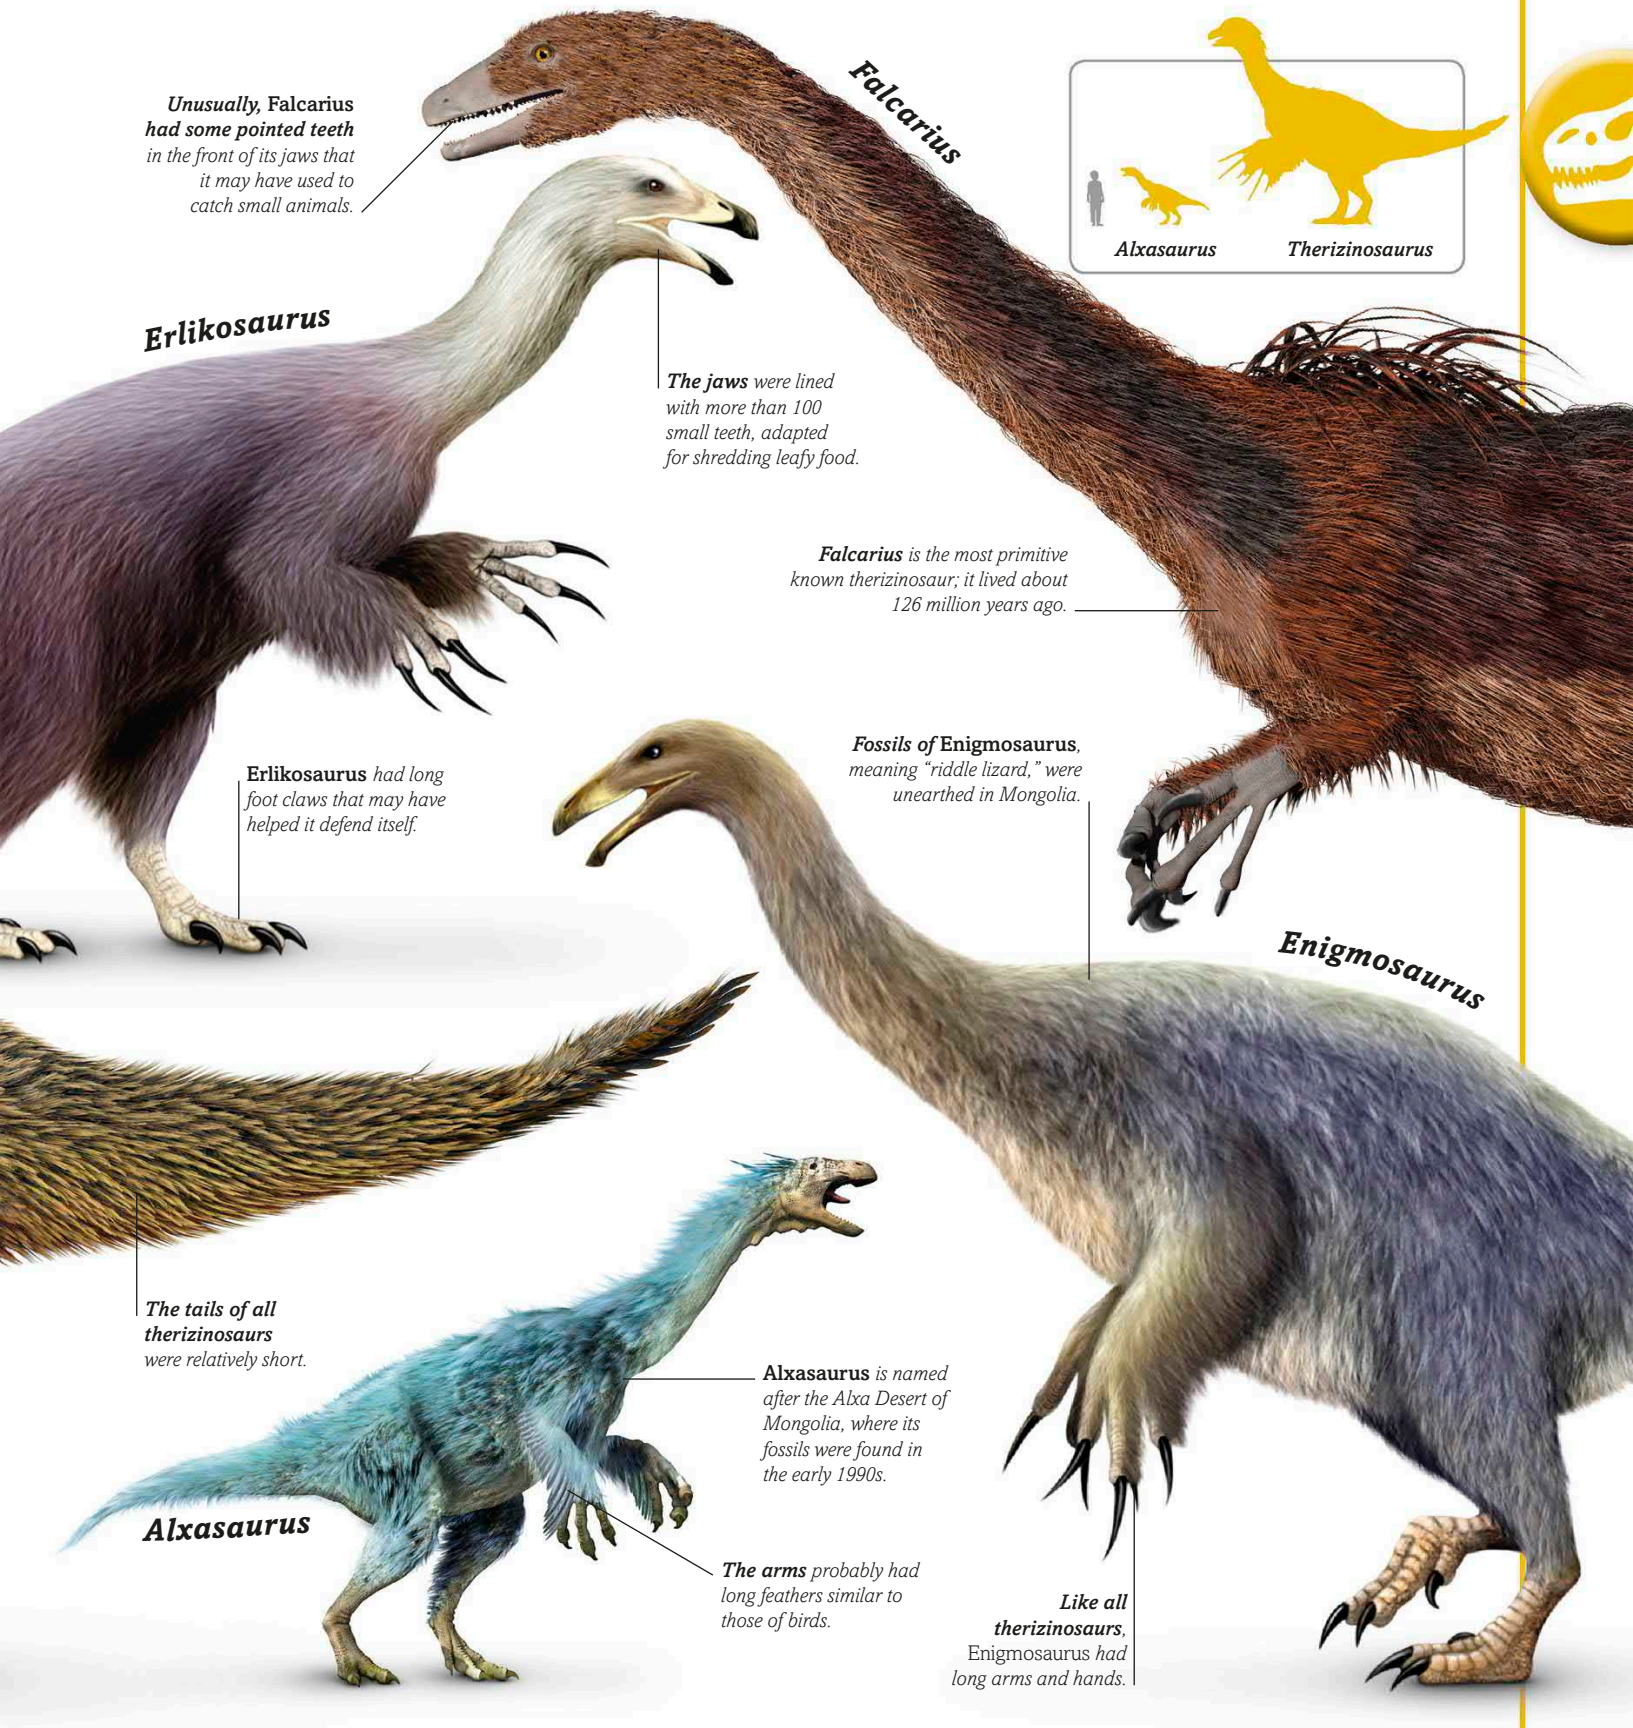

filaments, making therizinosaurs like ***Erlikosaurus*** look as though they had dense fur. Their long arms had big hands equipped with huge claws—those of the giant ***Therizinosaurus*** are the longest claws of any known animal. The therizinosaurs may have used their claws to haul leafy branches within reach of their mouths. But they could also have used their claws as formidable weapons against predators. With their bulky bodies, therizinosaurs could not move quickly, so fighting may have been their best form of self-defense.

Sharp claws

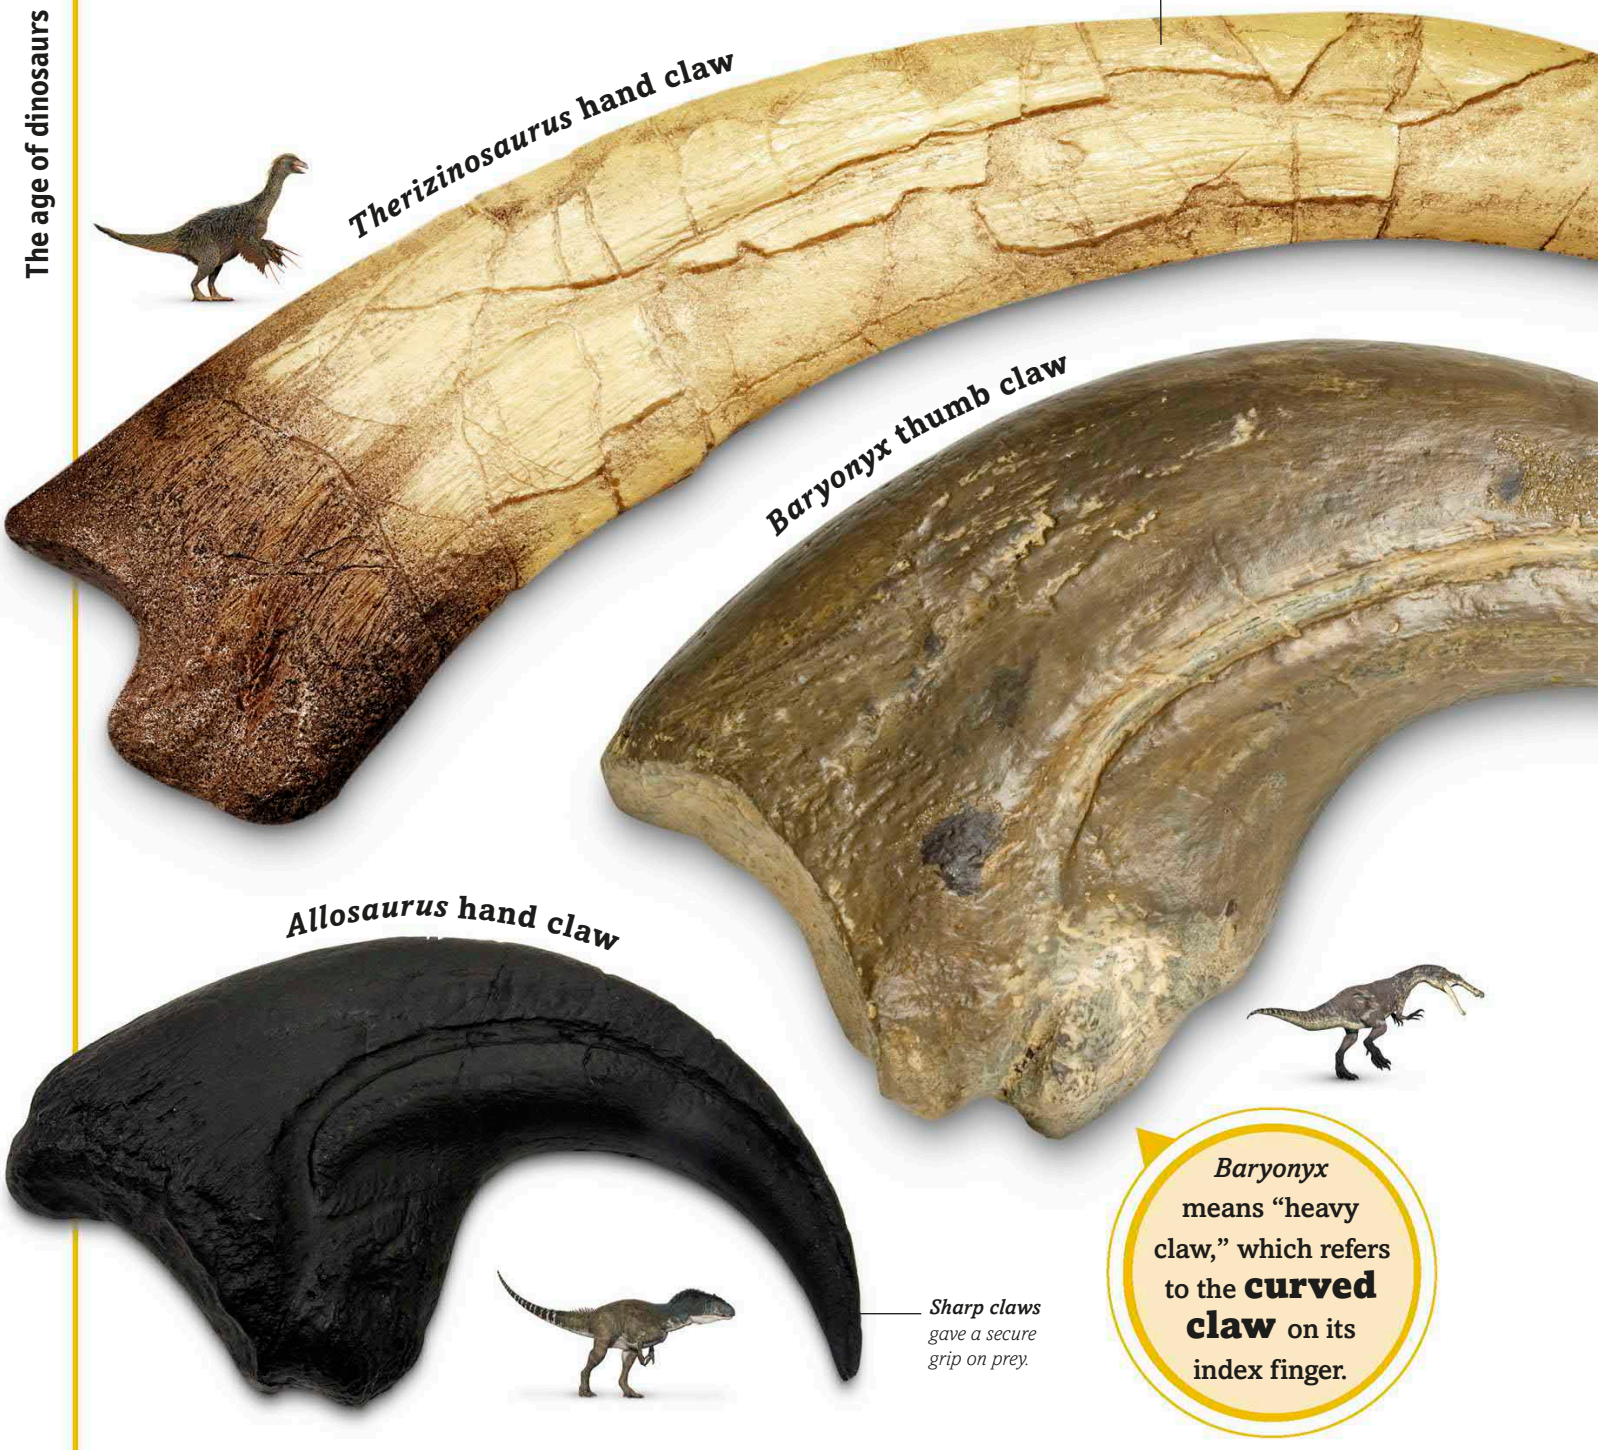

Strong claws were essential tools for most dinosaurs. Like many hunters, ***Allosaurus*** and ***Baryonyx*** used the claws on their forelimbs to seize prey, while ***Deinonychus*** had foot claws that were specialized for pinning prey to the ground. Most predators had strong but sharp foot claws that gave them the grip needed for running, and some of the smaller, birdlike hunters may have used their claws to climb trees. Gigantic four-footed plant-eaters such as ***Apatosaurus*** had stout claws that helped support their colossal weight, but they also may

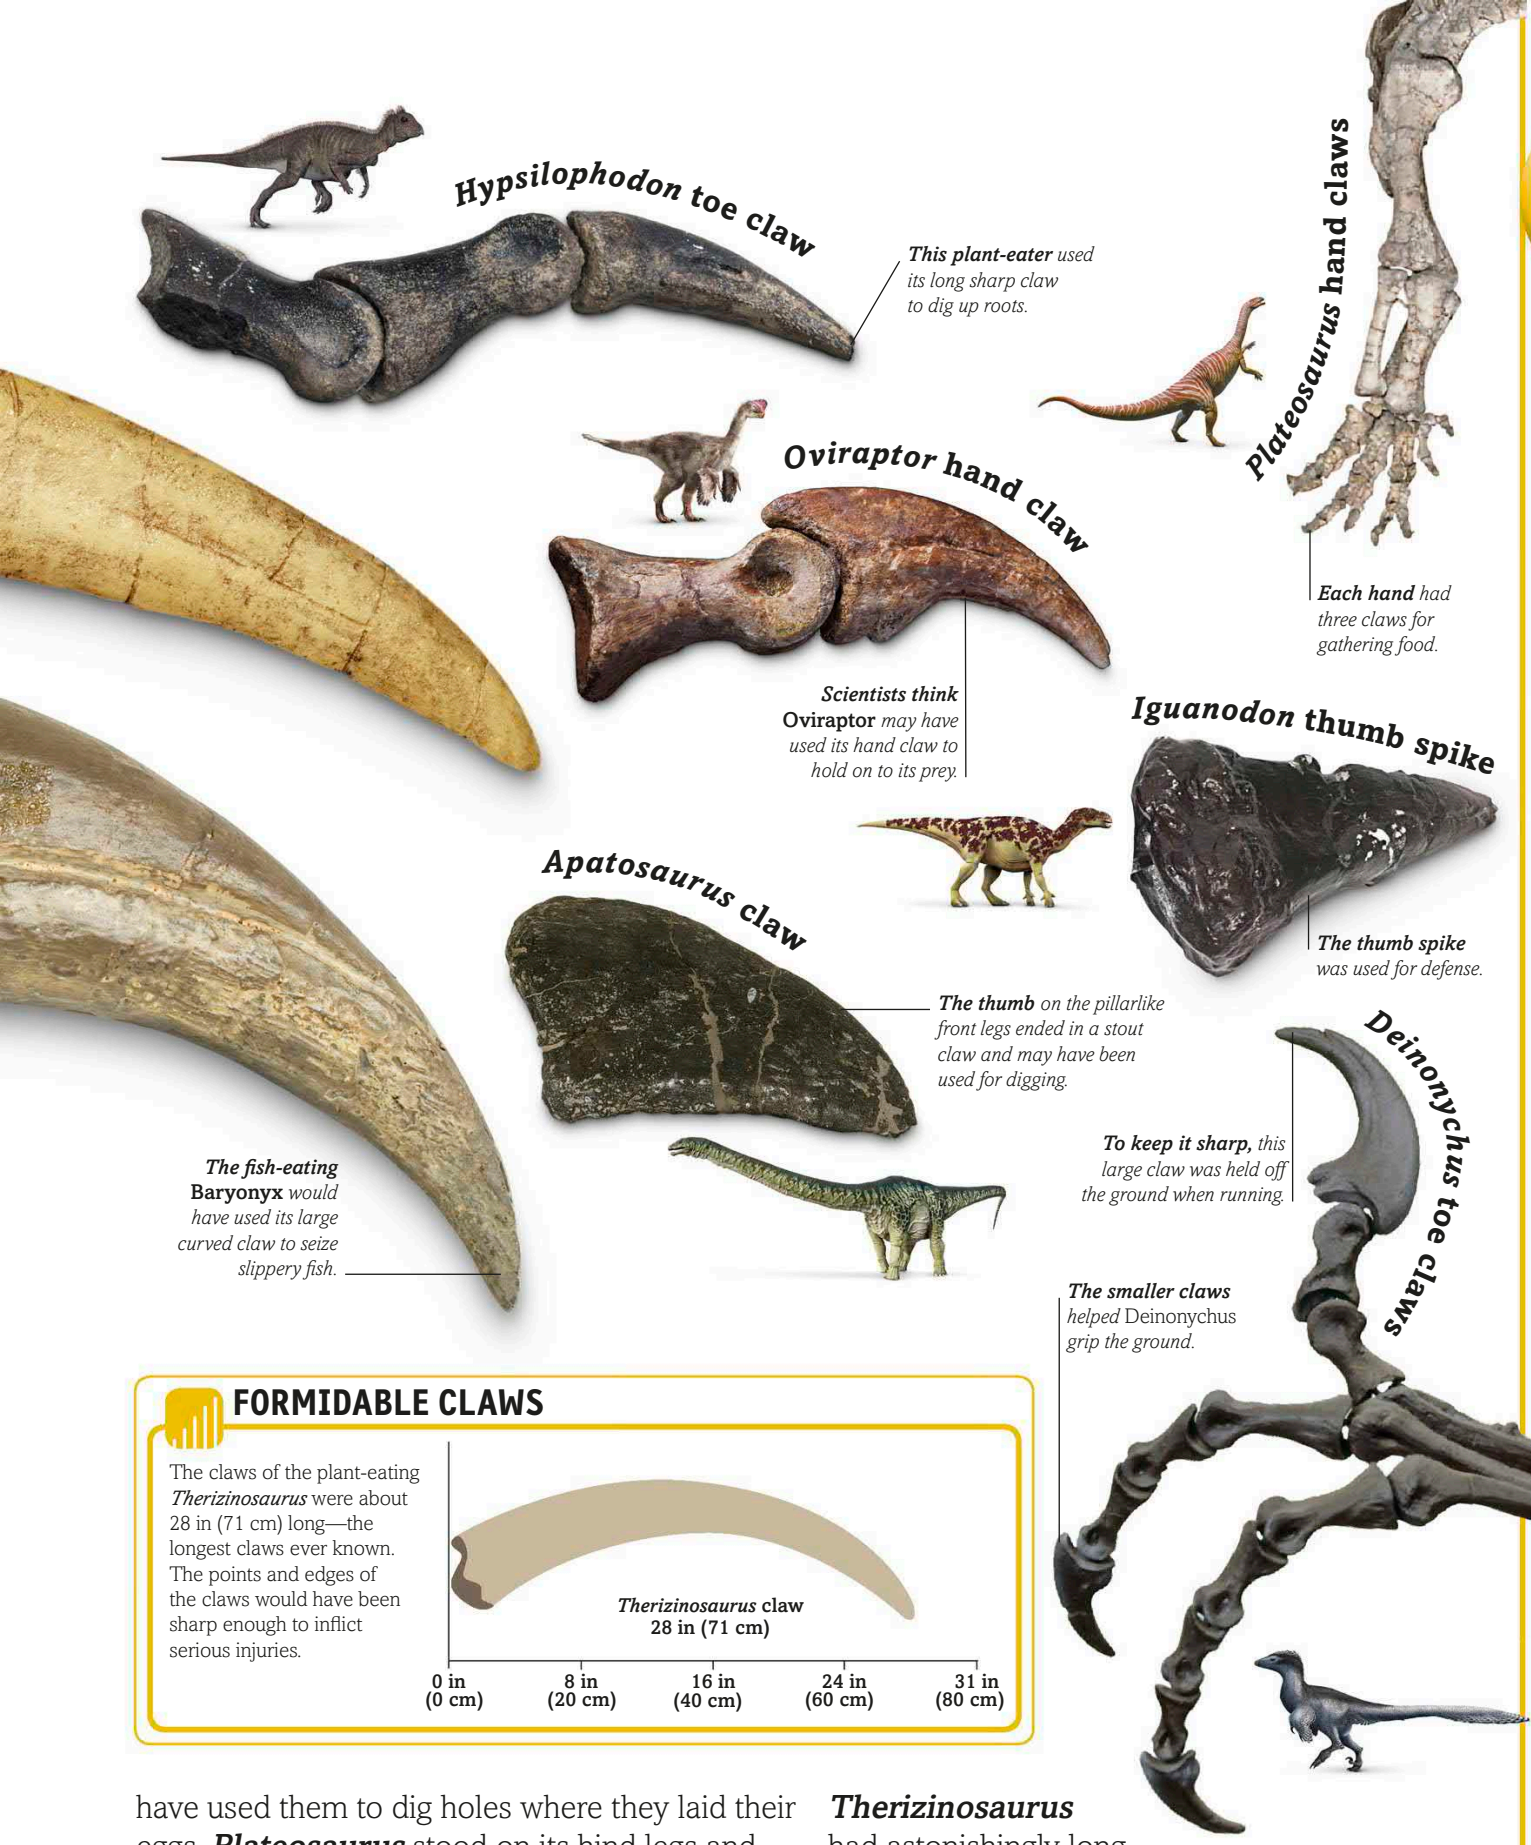

FORMIDABLE CLAWS

The claws of the plant-eating *Therizinosaurus* were about 28 in (71 cm) long—the longest claws ever known. The points and edges of the claws would have been sharp enough to inflict serious injuries.

have used them to dig holes where they laid their eggs. ***Plateosaurus*** stood on its hind legs and used its front claws to gather food from trees or, more vitally, defend itself from predators. ***Iguanodon*** had a stout thumb spike, which it may have used against its enemies, while ***Therizinosaurus*** had astonishingly long claws on its forelimbs that would have been lethal weapons, ideal for defense against some of the most powerful predators that ever existed.

Dromaeosaurs

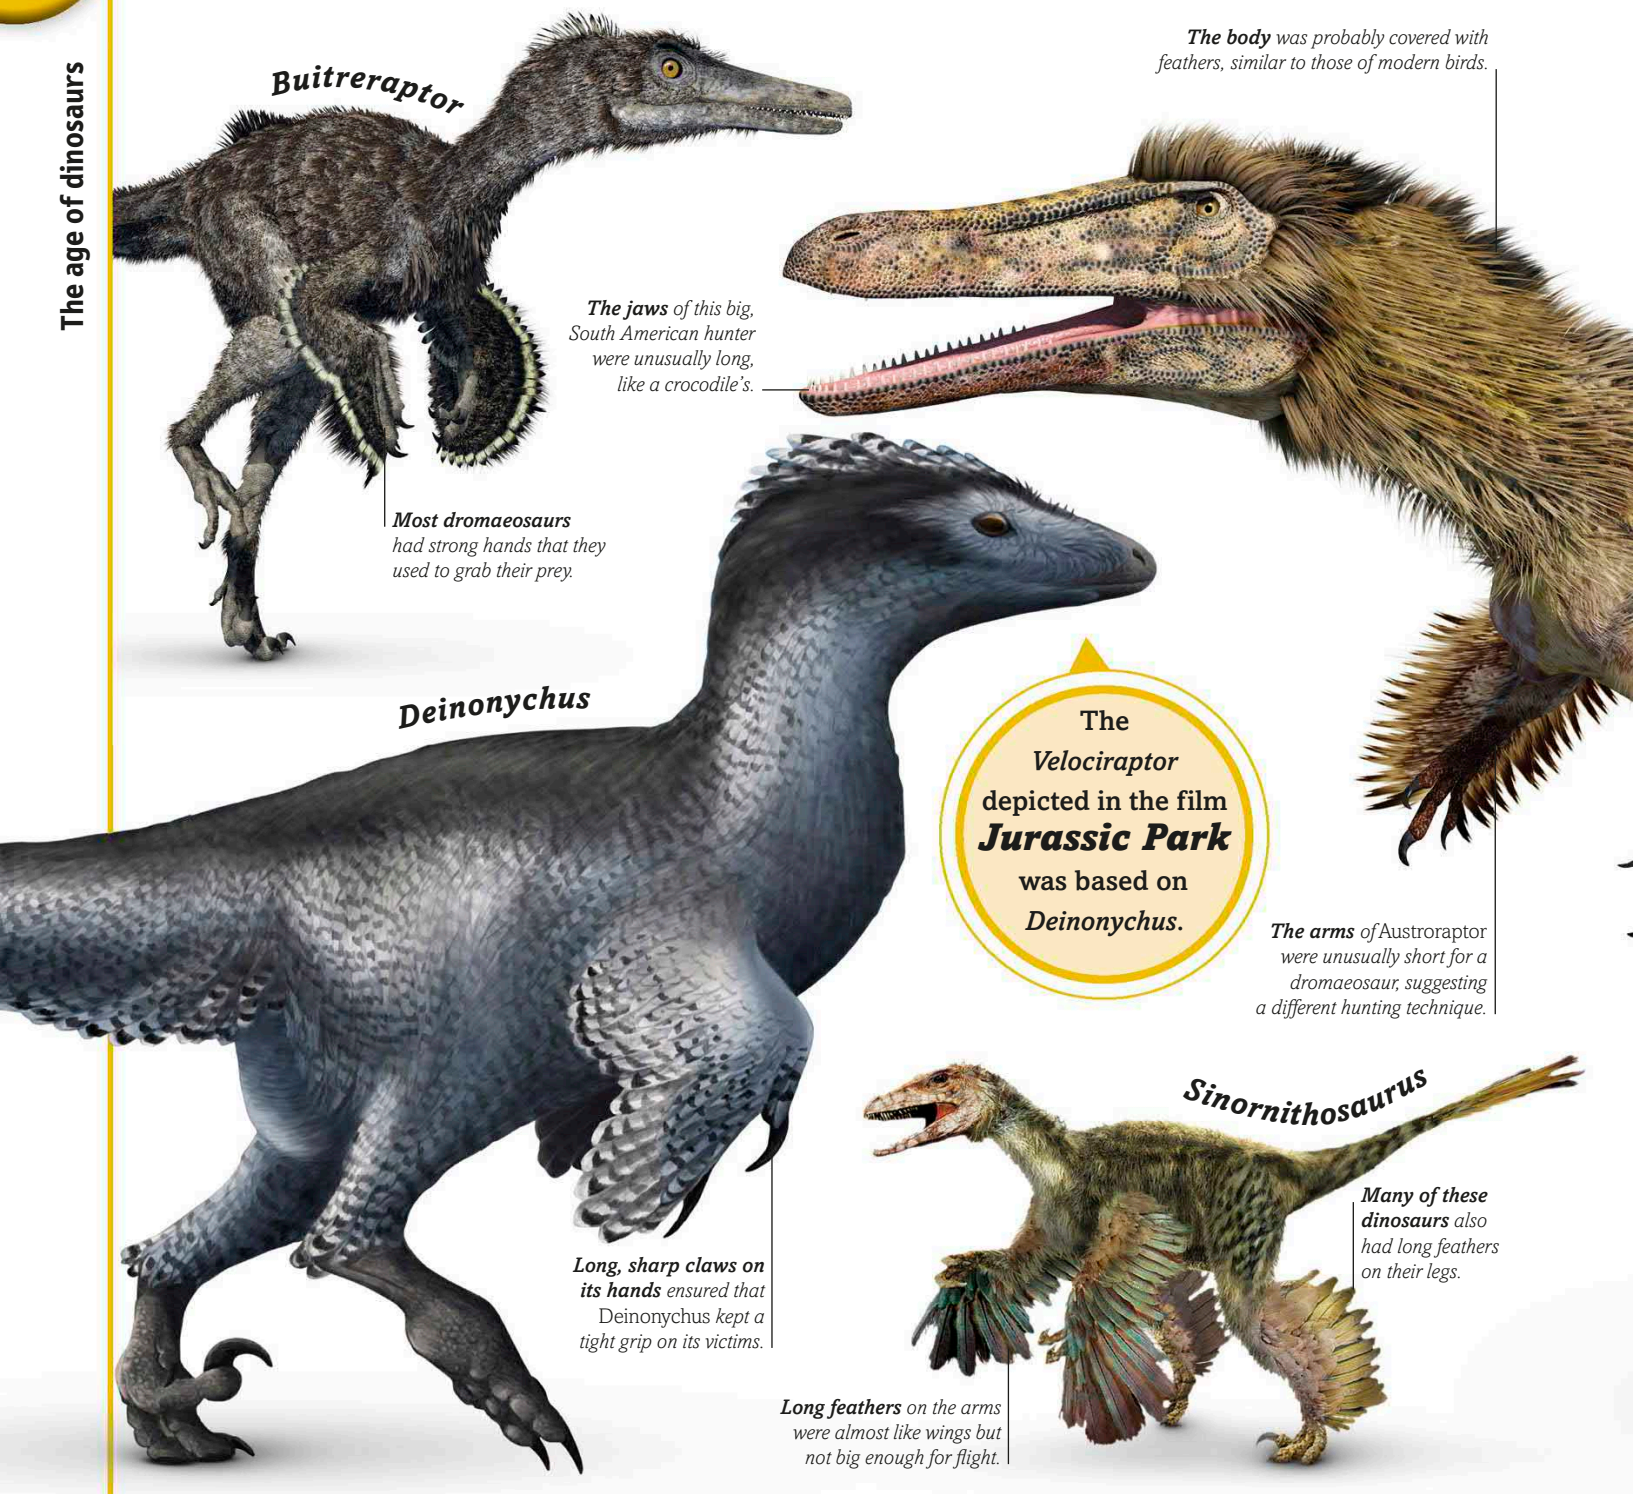

The most well-known lightweight hunters of the dinosaur age are the dromaeosaurs, often called raptor dinosaurs after animals like the small, agile *Velociraptor*. They were typically long-armed hunters with large claws on their hands. The second toe on each foot had an oversized, hooked claw that was held off the ground to keep it sharp. This specialized claw was probably used to pin prey to the ground, or even—in smaller types—to climb trees. Recent fossils found in China show that these dinosaurs were covered in feathers, and many had long,

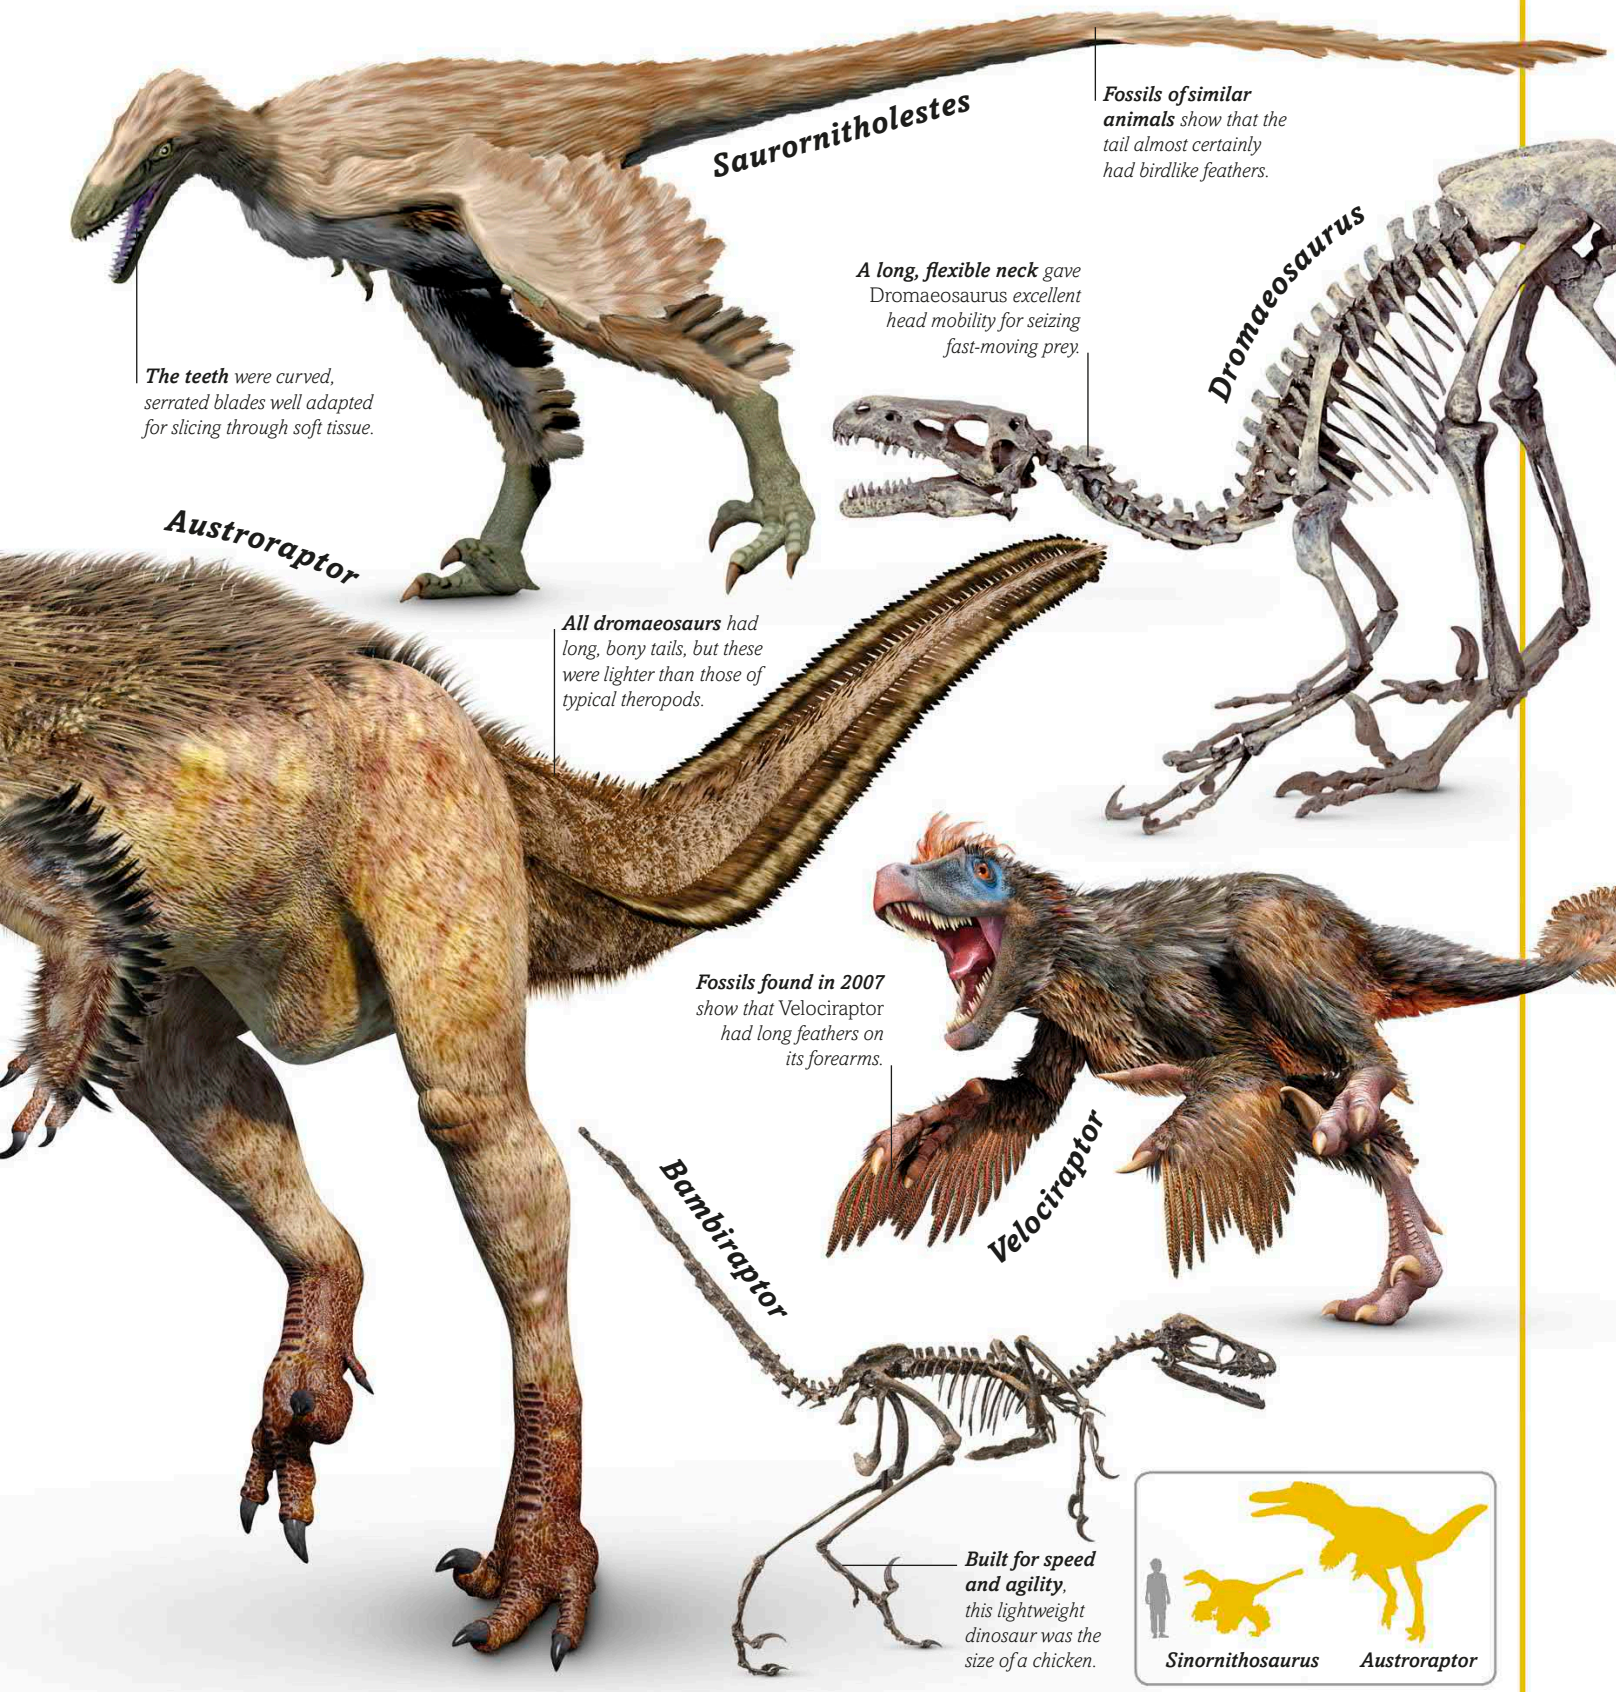

almost winglike feathers on their arms. They were closely related to the first birds, and the smallest ones—animals like ***Sinornithosaurus***—would have looked very birdlike. Small dromaeosaurs would have preyed on big insects and small ratlike mammals, but we know that the bigger ones, including *Velociraptor* and ***Deinonychus***, attacked other dinosaurs. Some, such as ***Buitreraptor*** and the unusually large ***Austroraptor***, had long snouts filled with pointed, conical teeth that were more suited to catching fish.

TOOTHED EAGLE

When the first fossils of *Velociraptor* were found in Mongolia in the 1920s, it was imagined as a scaly, lizardlike animal. But fossils of a closely related dinosaur discovered in nearby China show that *Velociraptor* would have looked more like a bird. A row of bumps on one of its forearm bones also shows that its arms carried long feathers very like those of a bird's wing.

Even the behavior of *Velociraptor* was probably birdlike. Related dinosaurs laid their eggs in nests and sat on the eggs to keep them warm, using their "wings" to shelter them. *Velociraptor* almost certainly nested like this, perhaps in pairs, and while one of the pair brooded the eggs, the other would go hunting. Recent research into how *Velociraptor* hunted suggests that it ran after its prey and pounced on them like a flightless eagle, pinning animals to the ground with the special, enlarged claws on its feet. The hunter would then tear into its unlucky victim with its sharp-edged, serrated teeth, ripping it to pieces. It may even have taken some of the meat back to the nest for its mate.

DINOSAURS TAKE FLIGHT

Skin, scales, and feathers

Archaeopteryx

Long feathers *on its extended arms almost certainly gave this Jurassic dinosaur the ability to fly.*

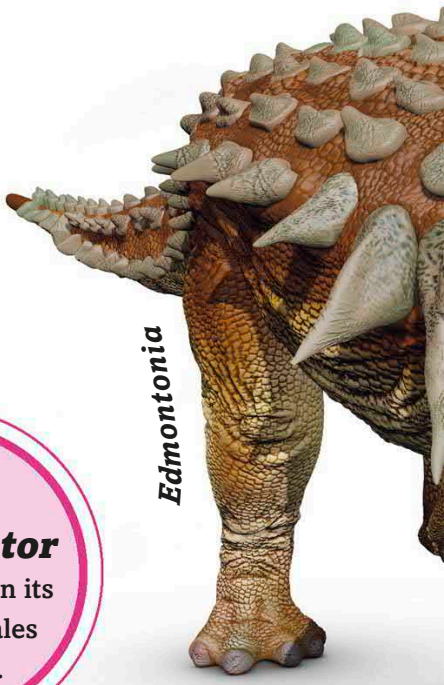

Edmontonia

Like a chicken, ***Juravenator*** had feathers on its body and scales on its legs.

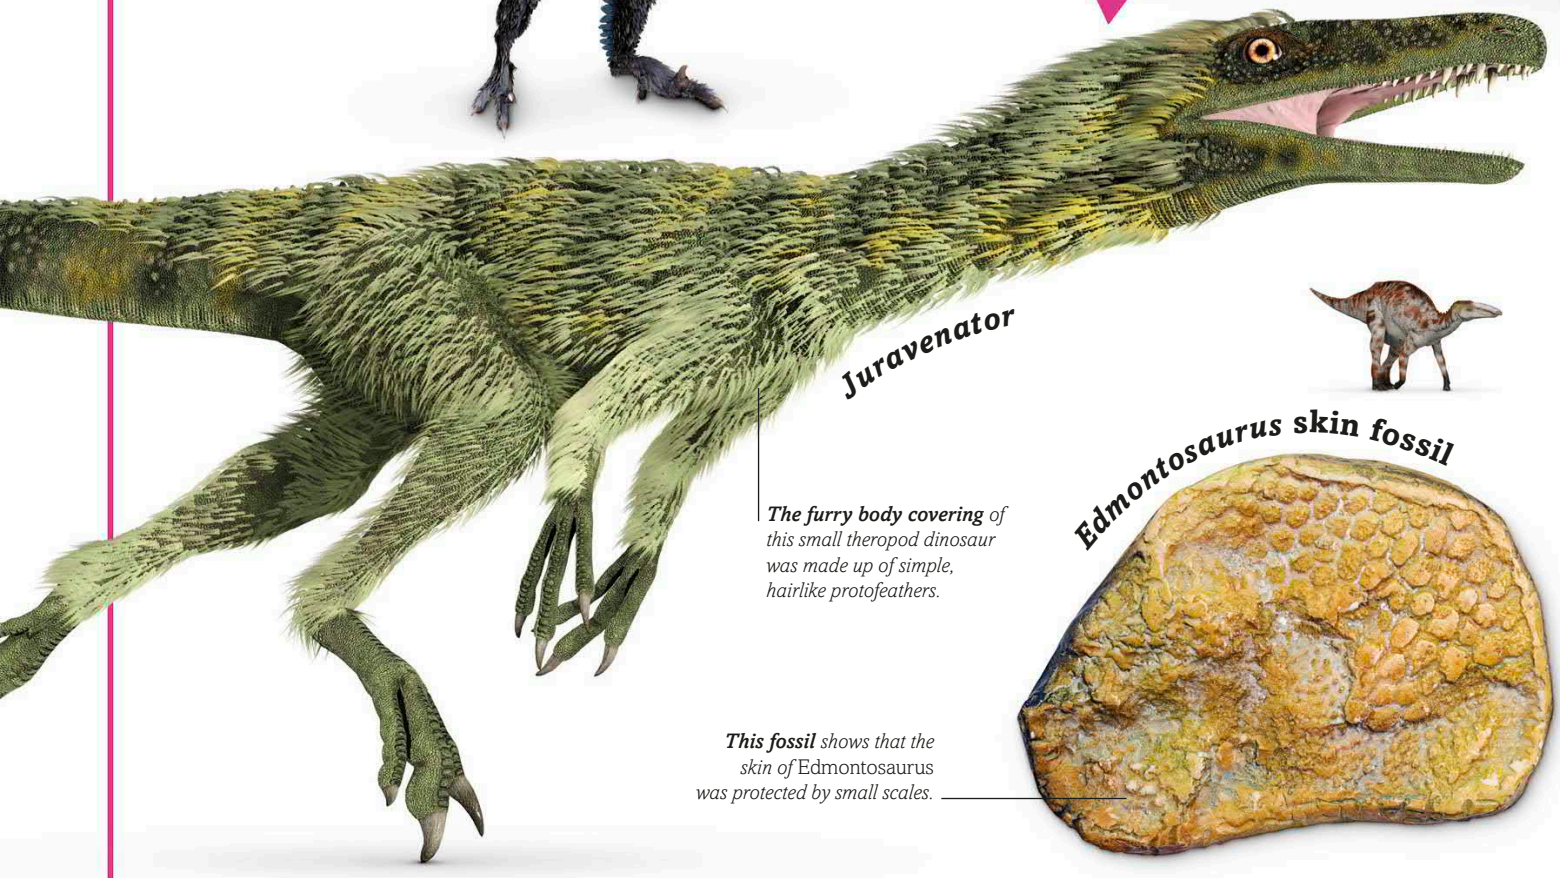

Juravenator

The furry body covering *of this small theropod dinosaur was made up of simple, hairlike protofeathers.*

Edmontosaurus skin fossil

This fossil *shows that the skin of* Edmontosaurus *was protected by small scales.*

Most extinct dinosaurs are known only from fossils of their bones and teeth, but some fossils also preserve details of soft tissues, such as skin. They show that many large dinosaurs like the hadrosaur ***Edmontosaurus*** had scaly skin, and some, such as ***Edmontonia***, had a type of armor formed from plates of bone (scutes) embedded in the skin. Amazing fossils discovered recently in China have revealed that many small theropod dinosaurs had feathers. Some, like ***Sinosauropteryx***, had short, slender filaments,

COLOR CODING

New research has revealed that the fossil feathers of animals like *Caihong* preserve the remains of melanosomes—structures inside cells that contain color pigments. The size, shape, and arrangement of these melanosomes are related to their color. So by analyzing fossil melanosomes, scientists may be able to reconstruct the colors of feathered dinosaurs.

or protofeathers, resembling hair; these probably kept the animal warm, like the fur of a mammal. Others, including ***Caihong***, had fully vaned feathers, like those of modern birds. Some of these feathers were longer, especially on the arms, which would have looked like short wings. Microscopic analysis even indicates that some of the feathers were brightly colored. All this new evidence shows that there is little difference between these extinct theropod dinosaurs and living birds and supports the conclusion that birds are small, flying dinosaurs.

Feathered hunters

***Scipionyx* fossil**

Scipionyx *had sharp teeth, unlike modern-day birds.*

Ornitholestes

The long dinosaur tail *was inherited by the first birds, but gradually reduced over time.*

Buitreraptor

Epidexipteryx *had long plumes extending from its short, bony tail, which was similar to that of a modern bird.*

The unusually long snout *bristled with small teeth adapted for seizing and gripping prey.*

Epidexipteryx

Like many small dinosaurs, ***Ornitholestes*** is known from just a **single** fossil.

For decades it has been clear that the skeletons of small, long-armed theropod dinosaurs like *Buitreraptor* are similar to that of the first known bird, *Archaeopteryx*. More recent fossil evidence also shows that the bodies of many of these lightweight hunters were covered with feathers of some kind. This means that the only difference between these small dinosaurs and the first birds was the length of their arms and the nature of their feathers. At first sight a small, agile hunter with fuzzy feathers such as ***Ornitholestes*** might not seem very like

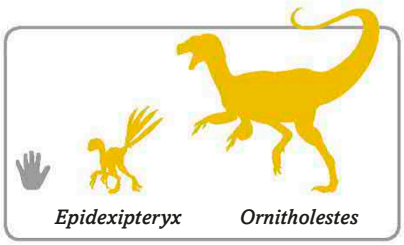

TINY SKULL

The skull of *Mononykus* was only slightly longer than a chicken egg. But its brain was quite large compared to its body size, suggesting that it was relatively intelligent. Its eyes were unusually big, indicating that they probably worked well in dim light, so it may have been most active at night or during the twilight of dawn and dusk.



2 in (5 cm) long

Chicken egg

The large eye socket suggests Mononykus *had very good vision.*

2¼ in (6 cm) long

***Mononykus* skull**

Shuvuuia

Small hunters with feather-fringed tails *may have curled them over their sleeping bodies to keep warm.*

These animals *had relatively large brains and big eyes—both important for their flying descendants.*

Mononykus *was a small dinosaur from the plains of Mongolia.*

Mononykus *had a small skull.*

Mononykus

The long feathers on the arms *were for show, and for protecting eggs and young, but in other animals they became adapted for flight.*

The short arms *had a single large claw that it could have used to dig insects out of dead wood.*

Mei long

A dense covering of body feathers *kept this animal warm.*

Mei long ***had ornamental feathers*** *on its legs as well as its arms.*

a bird, but extend its arms and add some longer feathers, and it might look ready for take-off. The fossils of similar animals, like *Velociraptor*, show that they had long, birdlike feathers sprouting from their arms, and many also had feathery fans on their tails. A fossil of ***Epidexipteryx*** clearly shows four very long, ornamental tail feathers. This type of feathering made small hunters such as ***Mei long*** look like short-winged pheasants or chickens, and if they were alive today we would instantly recognize them as flightless birds.

First up

***Unlike later birds**, these animals had long, bony tails. They were fringed with feathers and often had fans of longer feathers at the tip.*

***The unusual-looking* Yi qi** *was closely related to other birdlike dinosaurs but had wings of stretched skin like a bat.*

***These early birds** had strong claws at the bend of the wing, which they may have used for climbing or gripping prey.*

***Sharp teeth** would have been used for seizing flying insects.*

***The wings** had the same feather arrangement as those of modern birds, but were not so well adapted for flight.*

***Microscopic analysis of the crest feathers** indicates that they may have been rusty-red with a gray base.*

***Sharp claws** may have helped* Yi qi *grip the bark of trees, making it an effective climber.*

***With the exception of the claws**, the feet of* Anchiornis *were completely covered in small feathers.*

The first birdlike dinosaurs evolved in the Jurassic Period at least 150 million years ago. They had toothed jaws and long, feather-fringed tails, just like many small nonflying hunters that lived at the time. They resemble birds because most of them had long, feathery wings that were clearly adapted for some sort of flight. But we do not know how well they could fly. The wing feathers of animals like ***Archaeopteryx*** and ***Jeholornis*** are similar to those of modern birds, but their shoulder joints did not allow them to raise their wings

very high, and unlike modern birds, they did not have big breastbones to anchor powerful flight muscles. Some like ***Microraptor*** almost certainly could not fly in the true sense. It is possible that they were mainly adapted for gliding from tree to tree, but the feet of *Jeholornis* and many others were far better suited to life on the ground. So we still do not know exactly how these animals took to the air. We just know that they had long, broad wings, which would have been of little use if they could not fly in some way.

TAKING OFF In the late Jurassic Period, 150 million years ago, the age of dinosaurs still had more than 80 million years to run. But already, the first birdlike creatures were experimenting with flight. One of the earliest was *Archaeopteryx*, a crow-sized relative of agile hunters like *Velociraptor* that had particularly long arms with birdlike feathers. It was not exactly a bird, but it was close.

All the specimens of *Archaeopteryx* found so far lived in a region of Europe that was reduced to a group of dry islands surrounded by shallow seas. The islands seem to have had few trees, and *Archaeopteryx* probably ate small ground-living animals like lizards and insects. But its long, feathery wings must have been useful in some way. They may have helped it accelerate in pursuit of prey over the ground. It is also possible that, like modern chickens, it used them to fly up into tall shrubs to roost at night, out of reach of prowling hunters. It may have evolved in a region with taller trees and used its wings to glide between them. We do not know—but one day, another fossil may solve the riddle.

Early birds

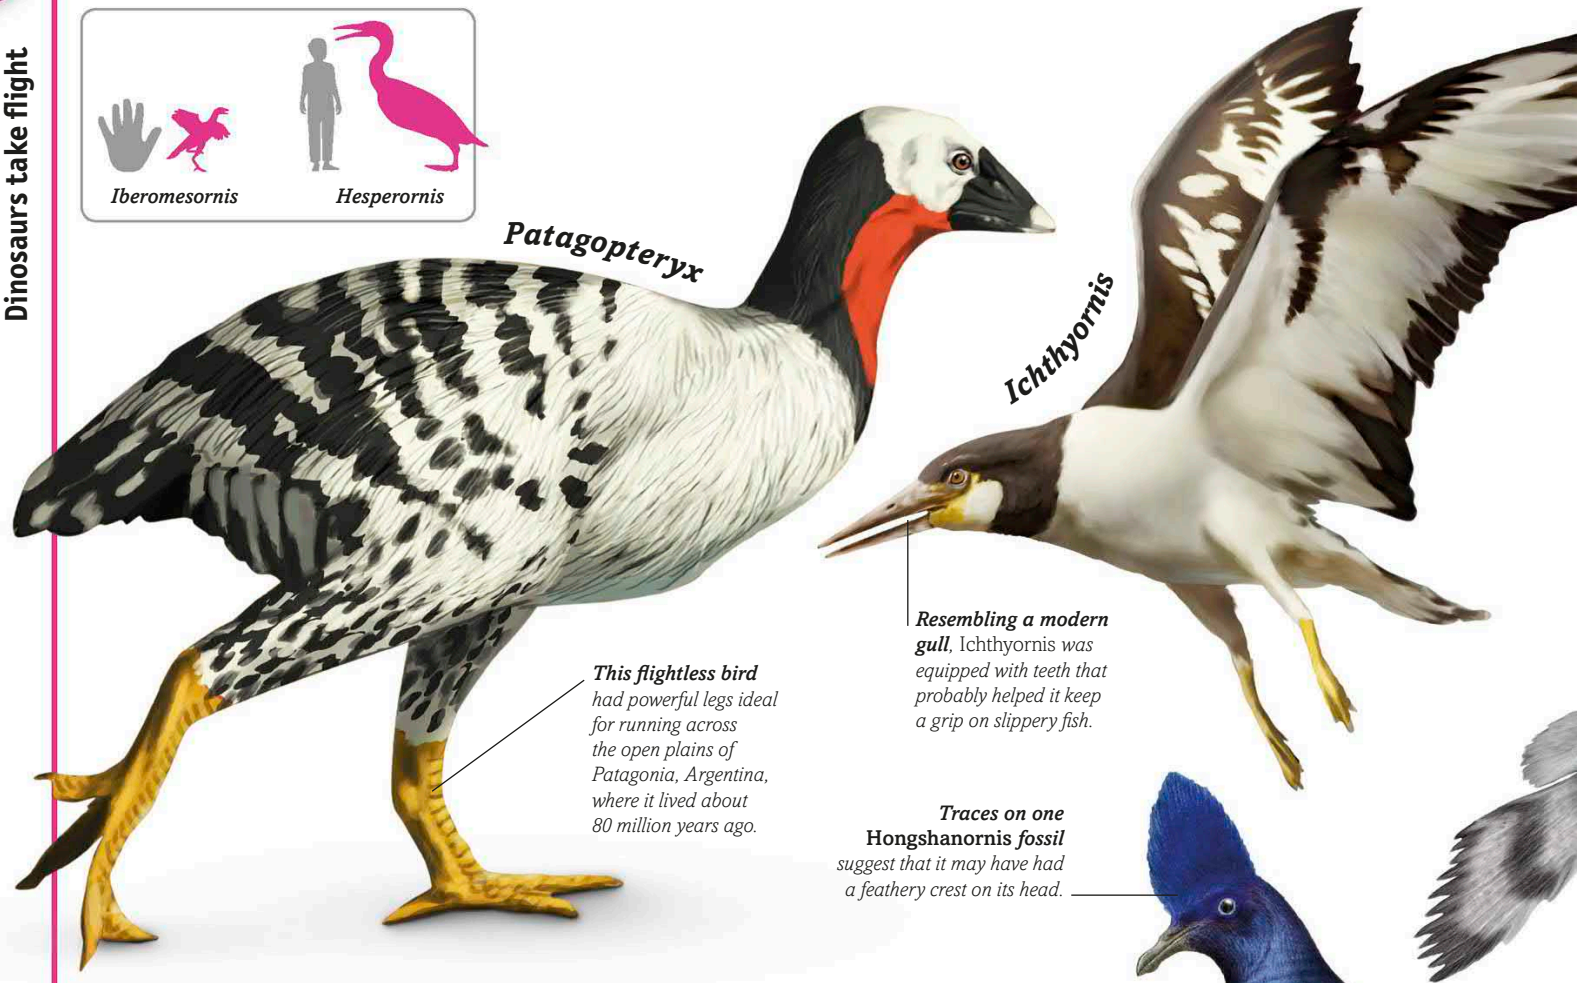

EVOLUTION OF FEATHERS

Between the early Jurassic and the Cretaceous, feathers evolved from hollow filaments to the form seen in modern birds. Over time, they developed a main shaft, or rachis, with increasingly complex branches called barbs that zipped together to form vanes. Early vaned feathers had a central rachis, but in later feathers the rachis is off-center. These asymmetrical feathers made more efficient wings and were the key to effective flight.

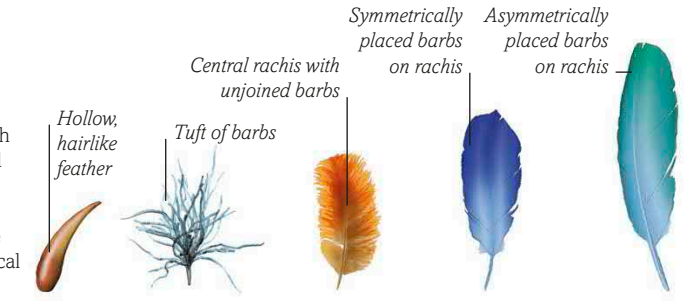

In the Cretaceous Period, about 25 million years after *Archaeopteryx* made its first clumsy flight, the early birdlike dinosaurs started giving way to more modern-looking birds like *Confuciusornis*. This is one of the oldest short-tailed, toothless birds known, although it still had substantial wing claws. Like other birds of the same period, including the sparrow-sized ***Iberomesornis*** and the slightly bigger ***Concornis***, it had a big breastbone for anchoring flight muscles; it must have been able to fly well. In time, birds like ***Hongshanornis***

became more specialized for flight, with stronger skeletons to resist flight stresses. Many still had small teeth, especially fish-eating seabirds like ***Ichthyornis***, which lived about 90 million years ago. But others had abandoned them in favor of beaks, and by the late Cretaceous, about 70 million years ago, many modern-type birds were flying over the heads of the giant dinosaurs. Some birds, including ***Patagopteryx***, had given up flight to live like ostriches, while the flightless ***Hesperornis*** hunted underwater like a giant cormorant.

Giant birds

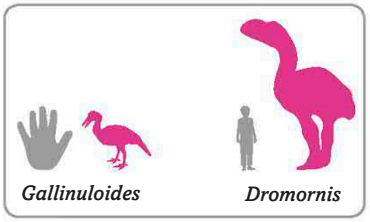

At 10 ft (3 m) tall, *Dromornis* was the **largest bird** that ever existed.

Terror birds *had huge, hooked beaks for killing and tearing the flesh of their victims.*

Dromornis

Phorusrhacos

Phorusrhacos *had a very flexible neck that allowed it to strike quickly at prey.*

The massive legs *of* Dromornis *supported its colossal weight—it weighed 10 times as much as a human.*

Sharp claws *were used to pin struggling prey to the ground as the bird prepared to kill and eat it.*

This fossil *shows that birds very similar to modern chickens were living in North America 48 million years ago.*

Gallinuloides fossil

Birds were the only dinosaurs to survive the mass extinction that wiped out their giant relatives 66 million years ago. They evolved to form many new types that are still with us today, including owls, ducks, and penguins. By about 40 million years ago, most of the familiar bird groups had appeared, but there were also a few very unfamiliar birds, including giant, flightless predators known as "terror birds." They included ***Phorusrhacos*** and ***Titanis***. Both were more than 8 ft (2 m) tall and had hooked beaks and huge claws for

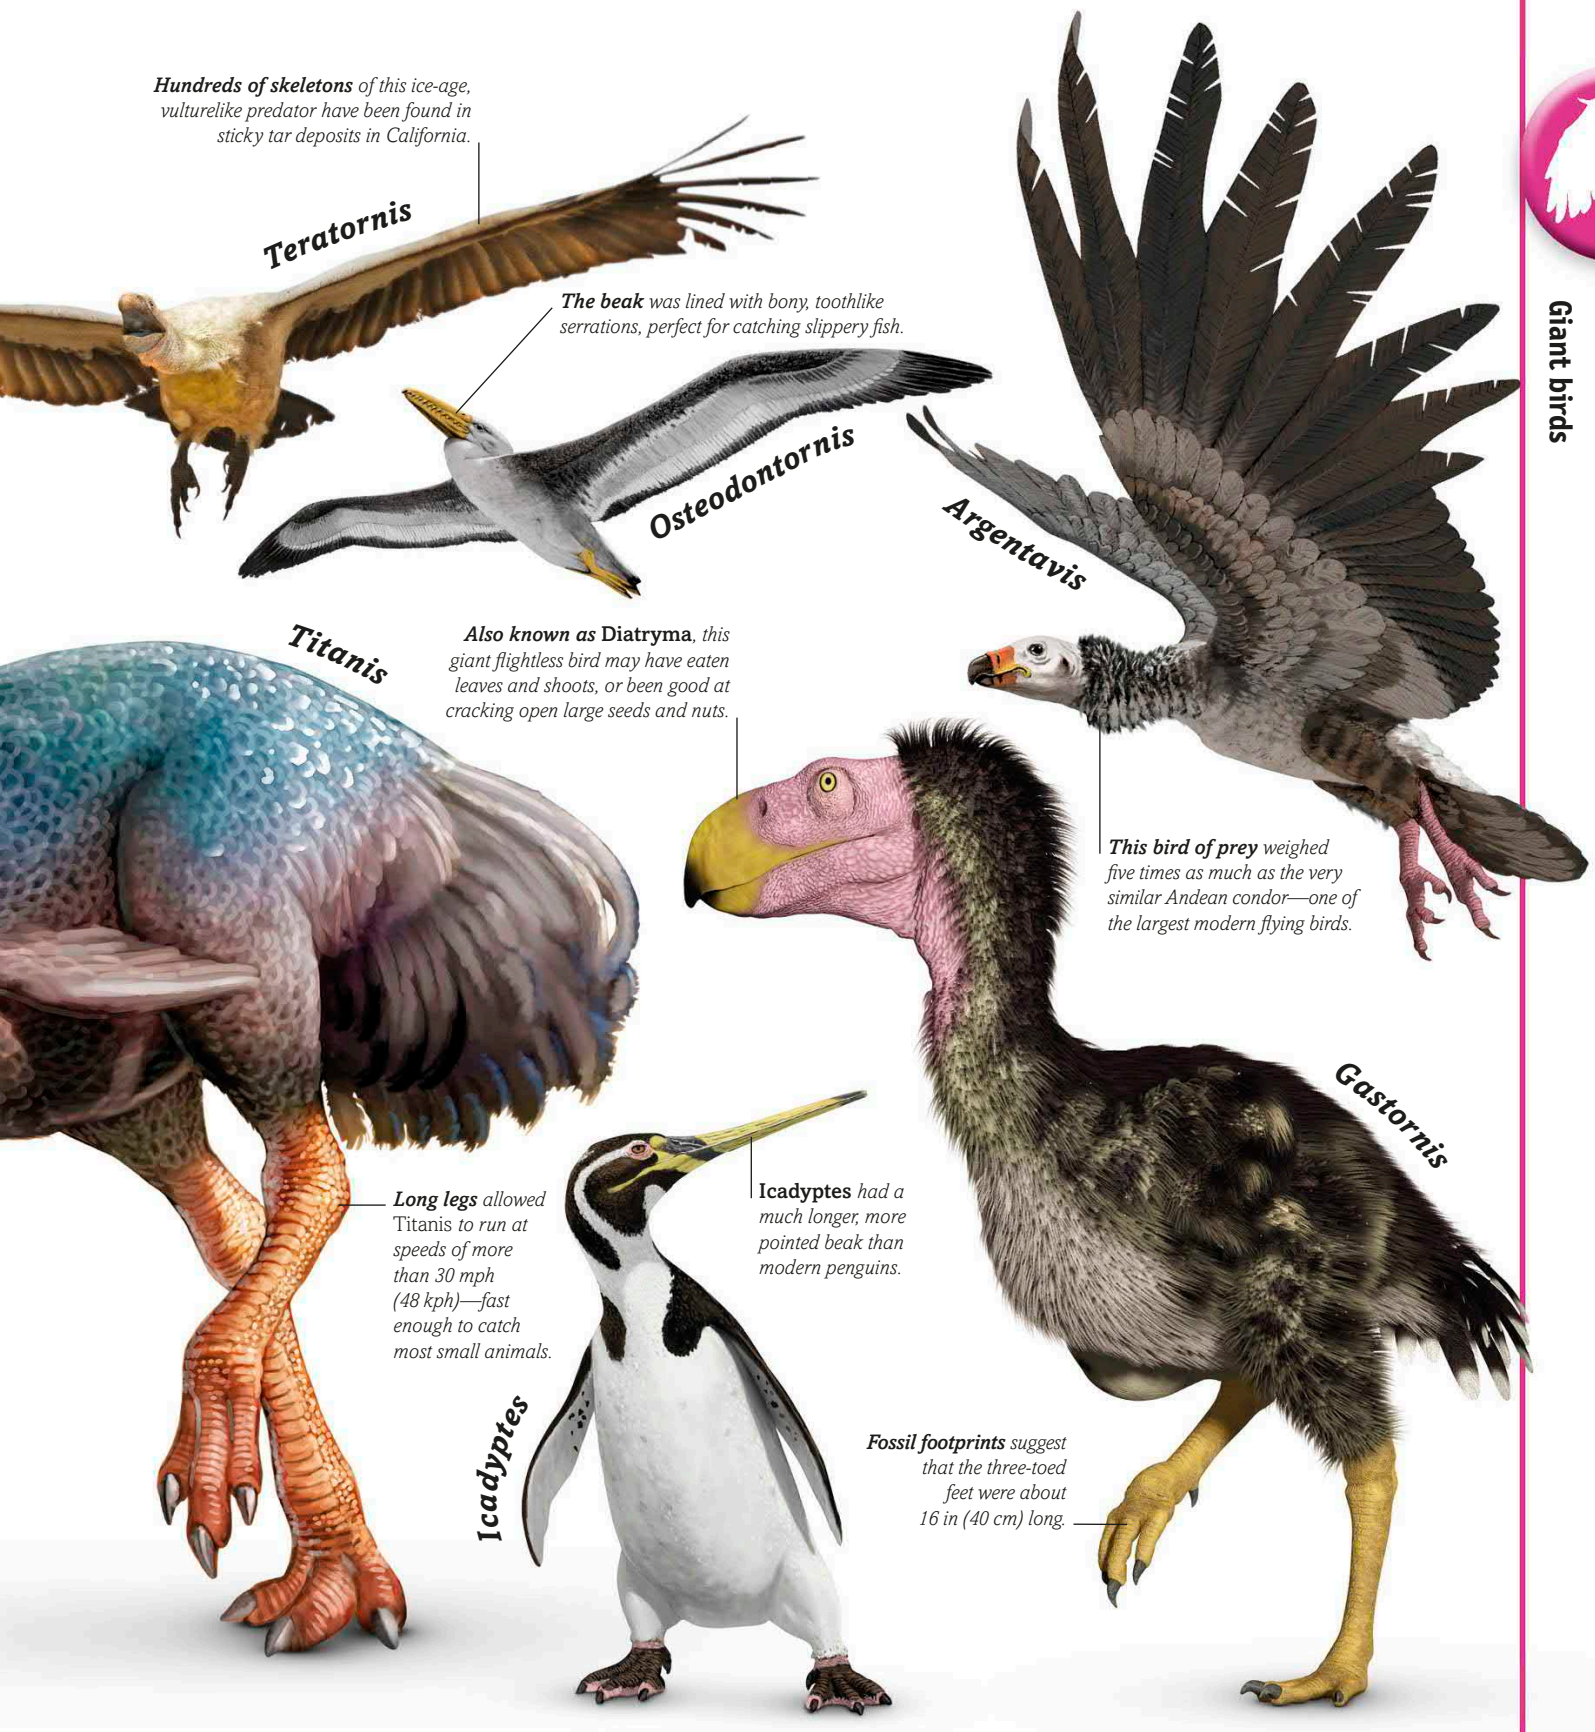

ripping apart prey on the open plains of North and South America. They were among the most powerful predators of their time. Another flightless giant, the Australian ***Dromornis***, probably ate plants, and the same may apply to the much earlier ***Gastornis***. Meanwhile, some airborne birds were also giants. ***Argentavis***, which soared above the plains of Argentina more than 5 million years ago, was a colossal, vulturelike bird of prey with an 26 ft (8 m) wingspan, and probably the largest flying bird that has ever lived.

HIGH-SPEED KILLER

With its long legs and massive hooked beak, *Kelenken* was one of the fastest, most powerful predators of its era. The biggest of the ferocious "terror birds," it hunted in the open plains of Patagonia, South America, about 15 million years ago. Its main prey were probably small mammals, but it may have had the speed and strength to hunt bigger victims.

Discovered in 2006, the virtually intact fossil skull of *Kelenken* was 28 in (71 cm) long, making it the biggest bird skull ever found. Its enormous, immensely strong hooked beak would have been like that of a gigantic eagle, and *Kelenken* probably used it in the same way to rip larger prey to pieces; it would have swallowed small animals whole. About 10 ft (3 m) tall, *Kelenken* had long, muscular legs that ensured it could outrun most of its victims, and it probably caught and even killed them by seizing and gripping them with its claws. It was so powerful that it may have driven other hunters off the open plains and into the forests, where its height would have made it a less effective predator.

PTEROSAURS

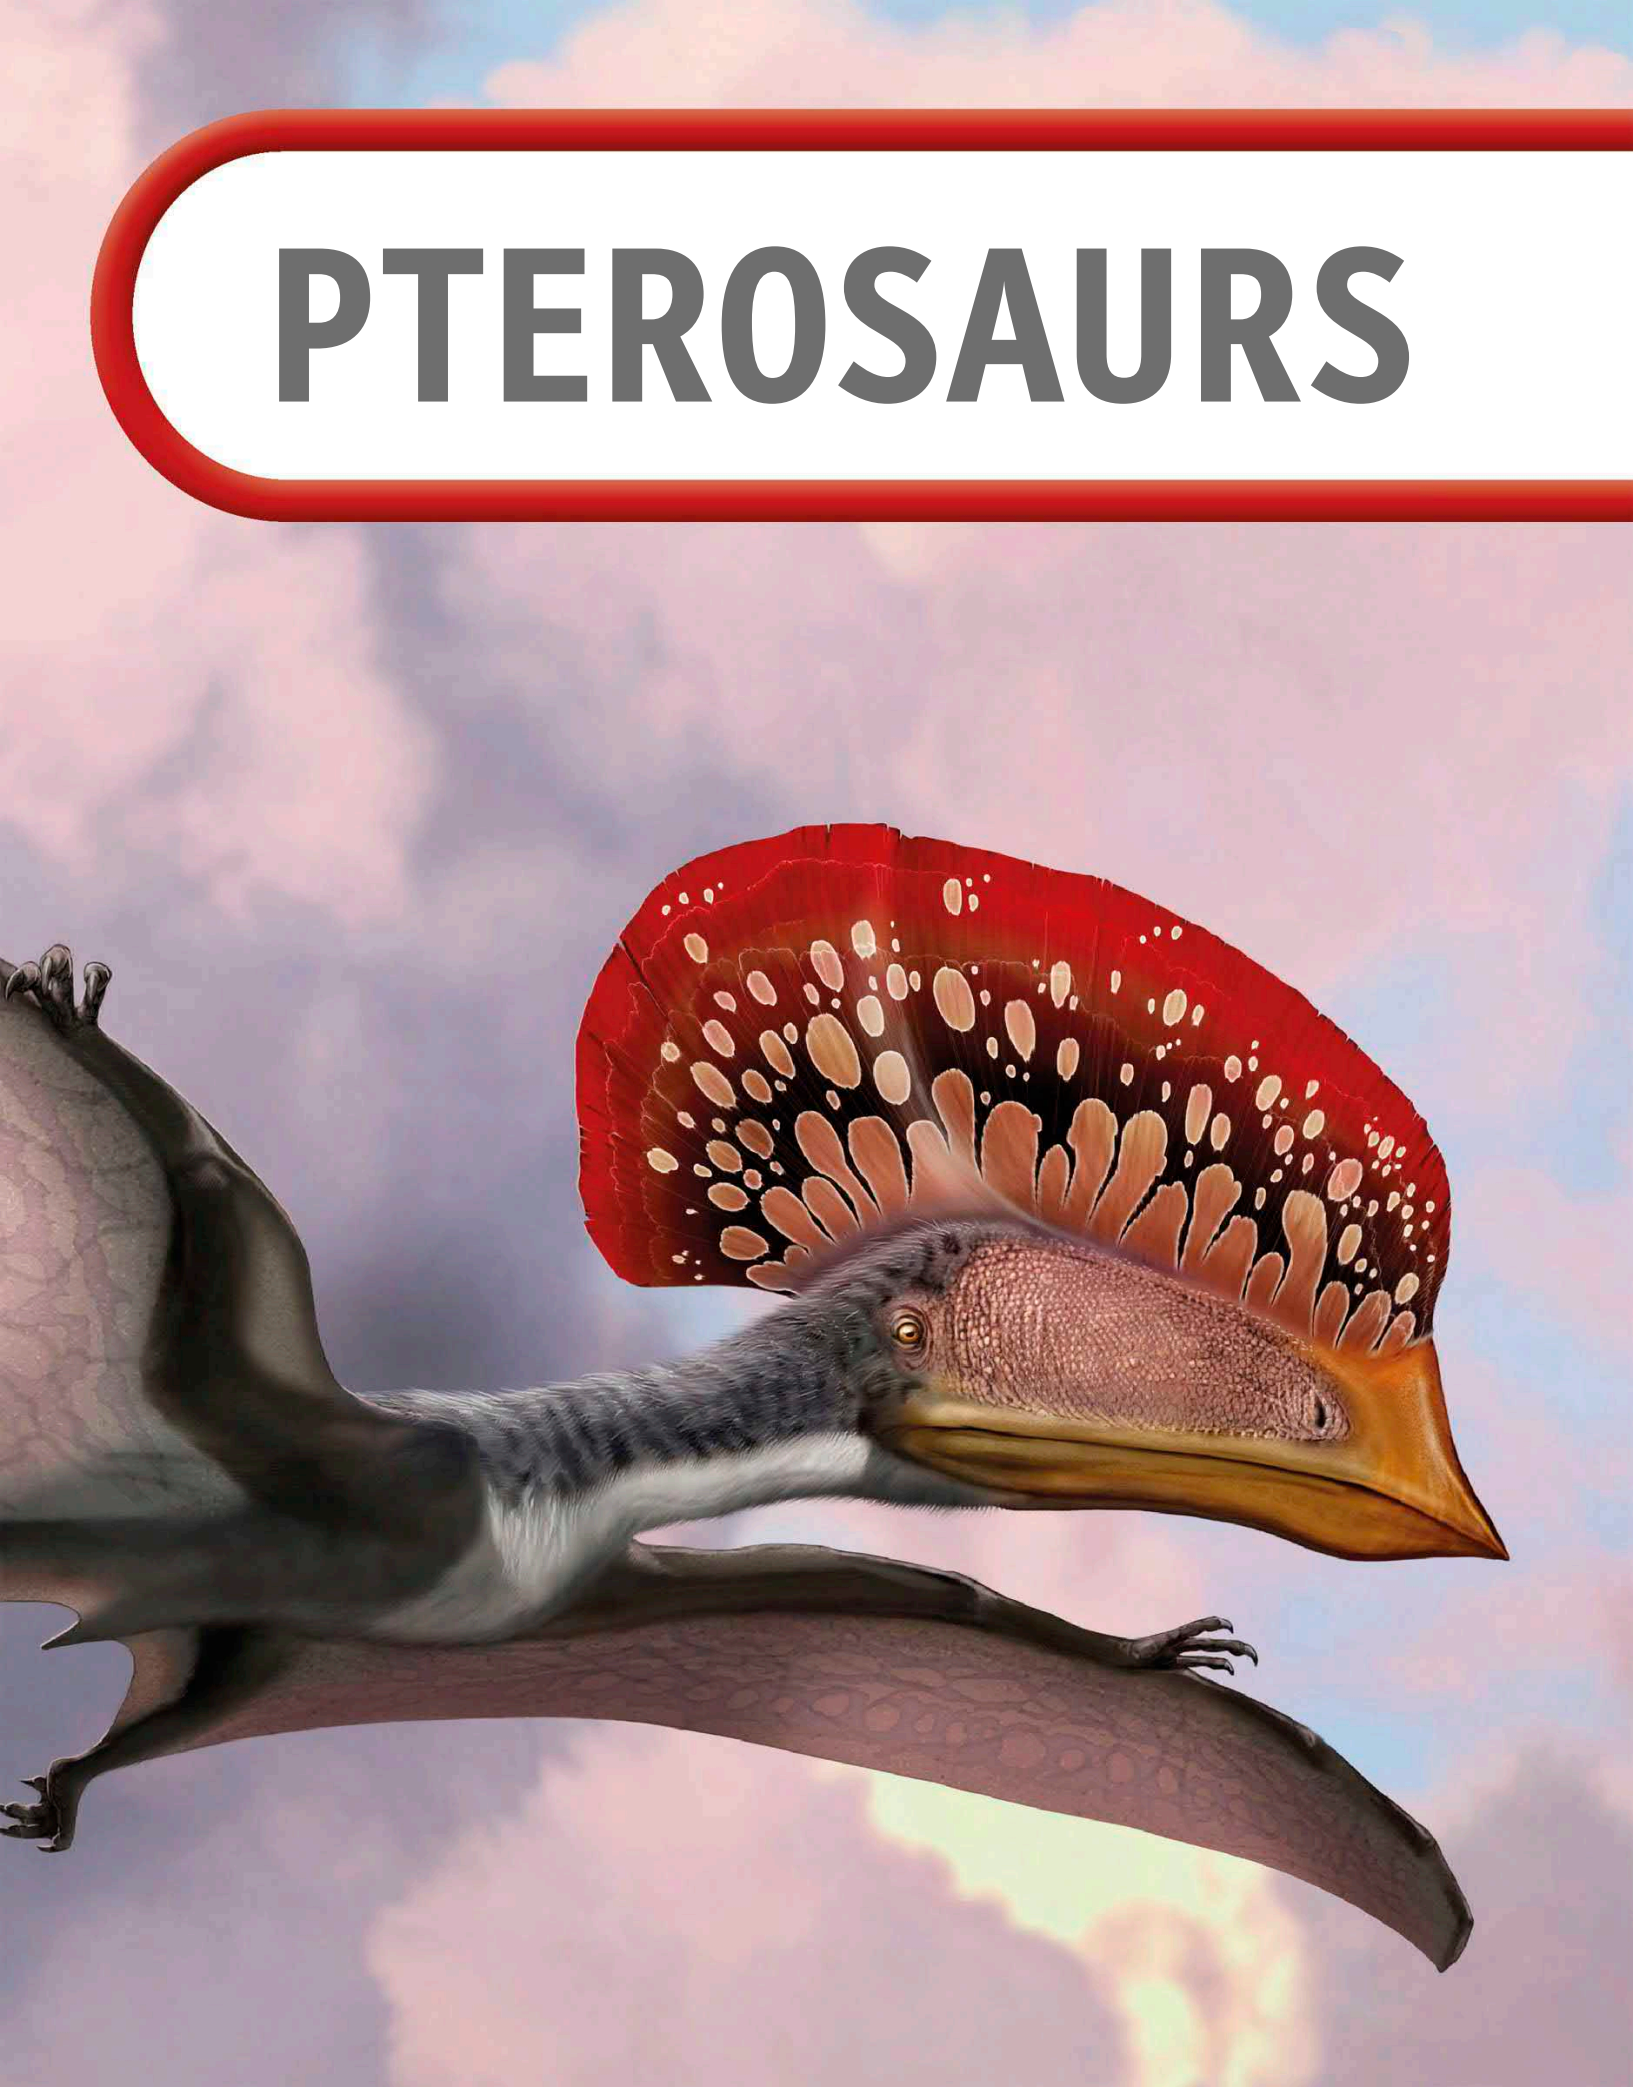

Early pterosaurs

The giant dinosaurs shared their world with close relatives called pterosaurs—flying reptiles that flew on wings of stretched skin. Their wings were similar to those of bats, but supported by the bones of just one hugely elongated finger. They were strengthened with springy fibers and contained sheets of muscle that continually adjusted the wing's shape to make it work as efficiently as possible. Pterosaurs had small, furry, and light bodies; excellent eyesight; and relatively big brains. The earliest ones found so far—

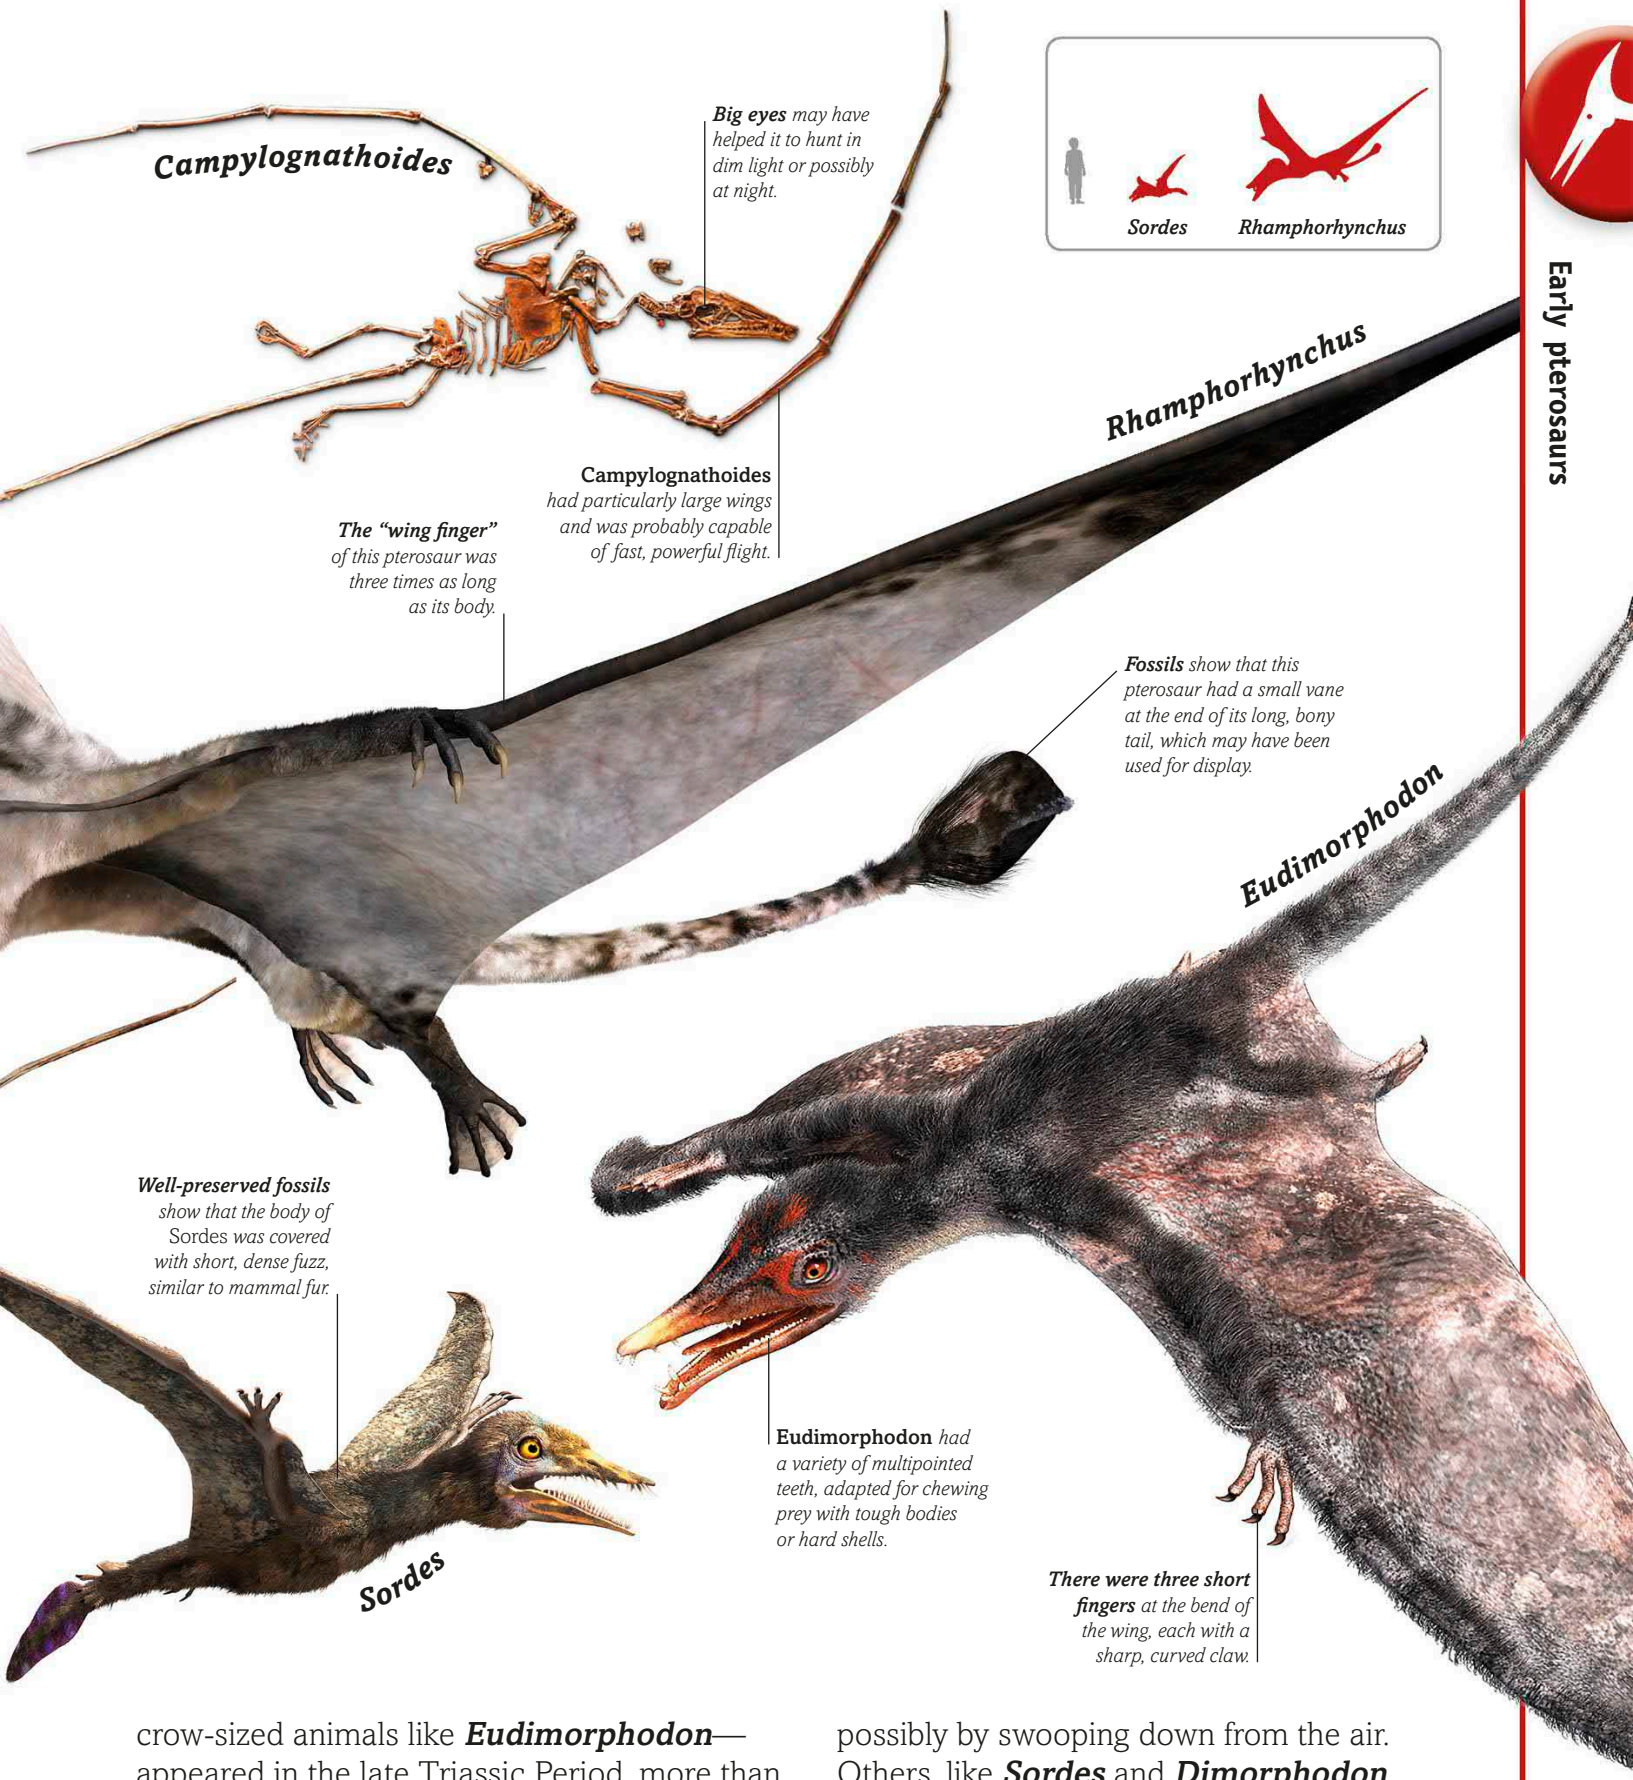

crow-sized animals like ***Eudimorphodon***—appeared in the late Triassic Period, more than 210 million years ago. They had short necks, long, bony tails, and most had jaws armed with a variety of sharp teeth to suit their diet. Some, such as ***Rhamphorhynchus***, caught fish, possibly by swooping down from the air. Others, like ***Sordes*** and ***Dimorphodon***, probably fed mainly on insects and other small animals that they caught on the ground or while climbing trees using their sharp wing claws.

Later pterosaurs

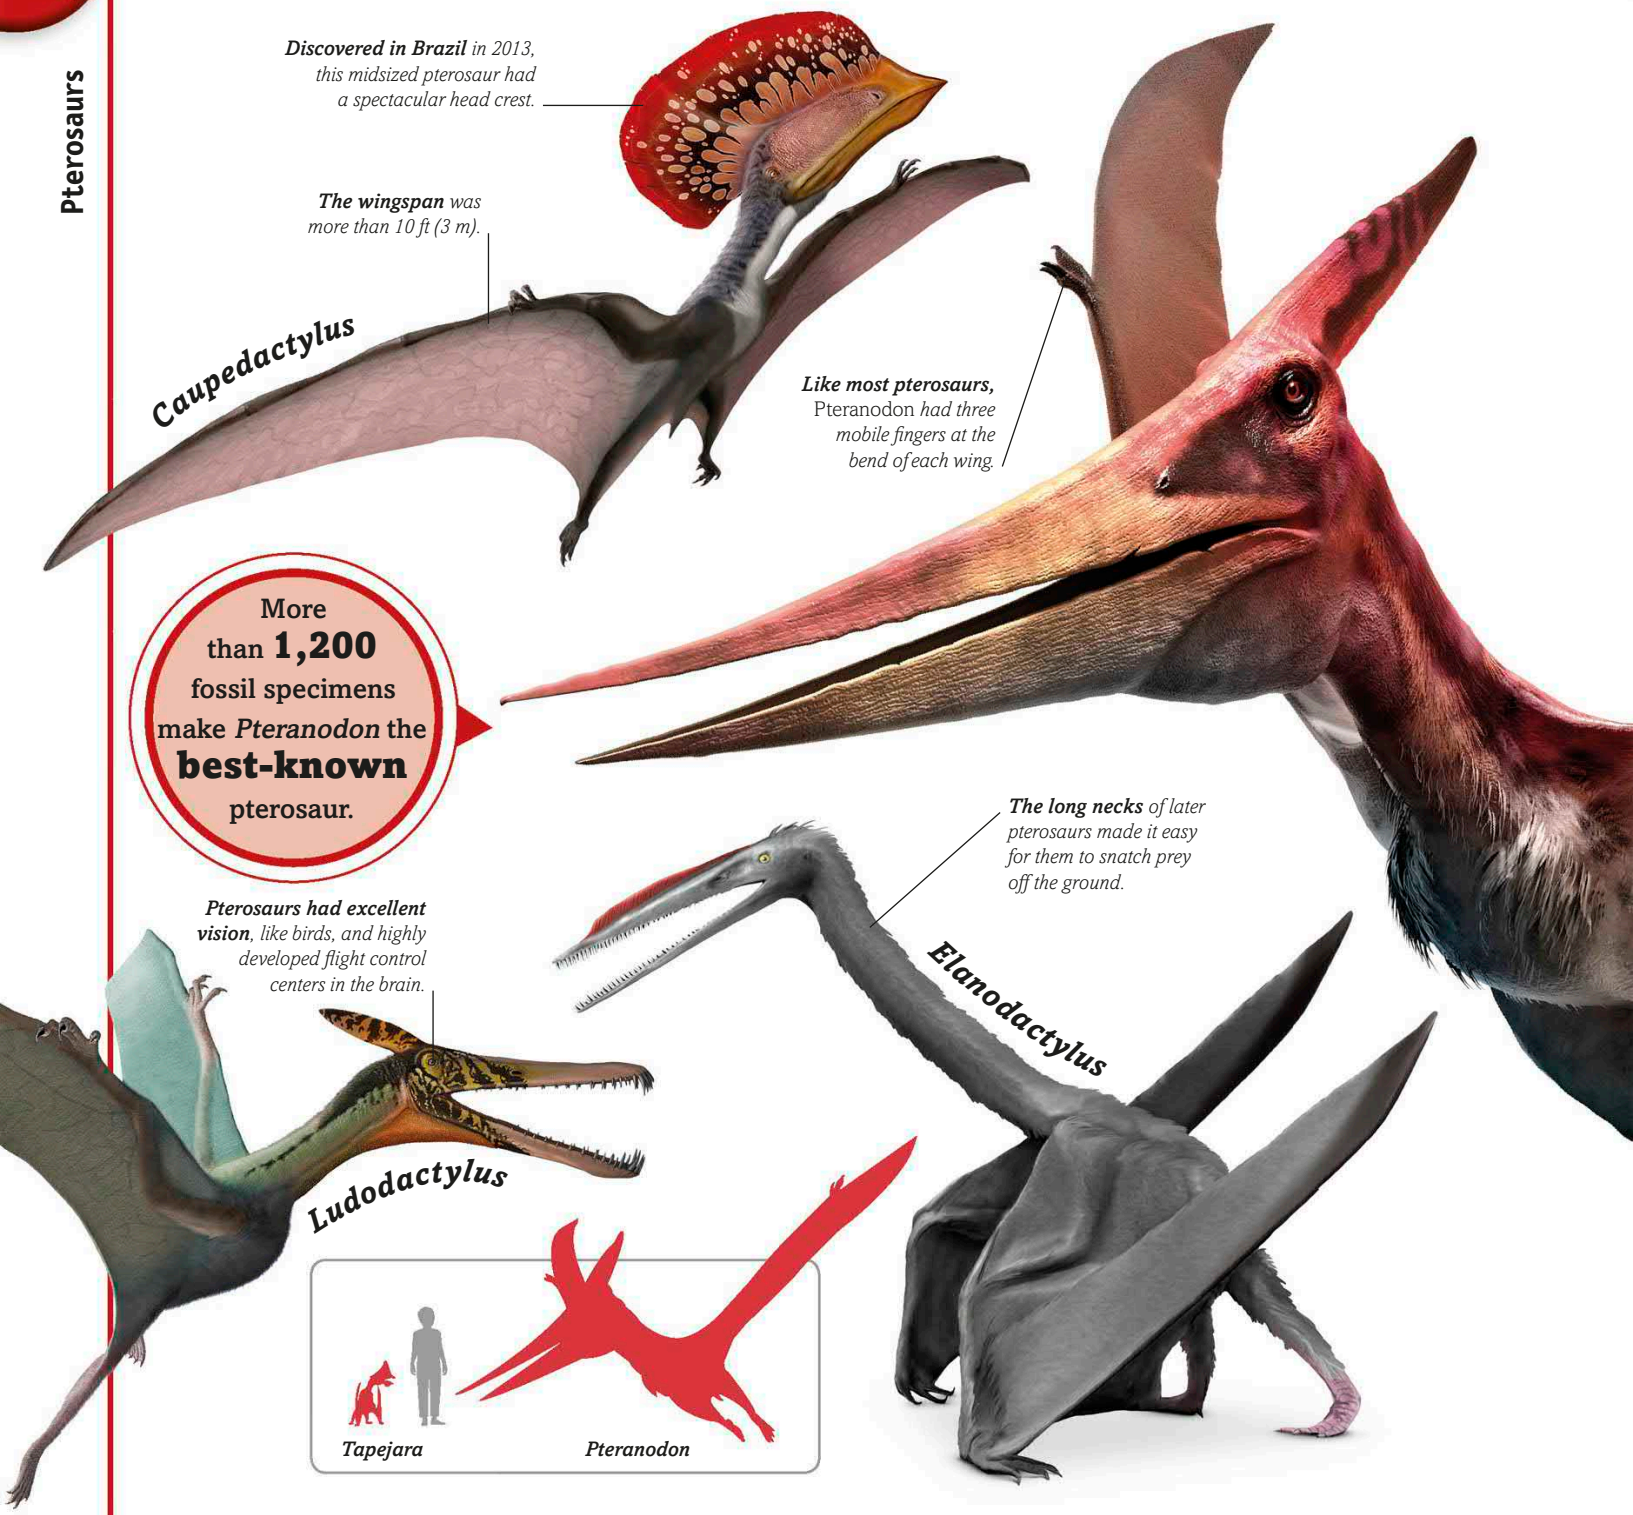

During the Jurassic Period, about 166 million years ago, pterosaurs with a new body plan started appearing. They had longer necks, shorter tails, and were also better adapted to life on the ground—evidence from fossil footprints shows that many of them, including ***Tapejara*** and ***Elanodactylus***, regularly walked on all fours, with their outer wings folded out of the way. Some pterosaurs were probably agile enough to hunt like this. Others, like ***Pteranodon*** and ***Cearadactylus***, seem to have hunted at sea—they were probably

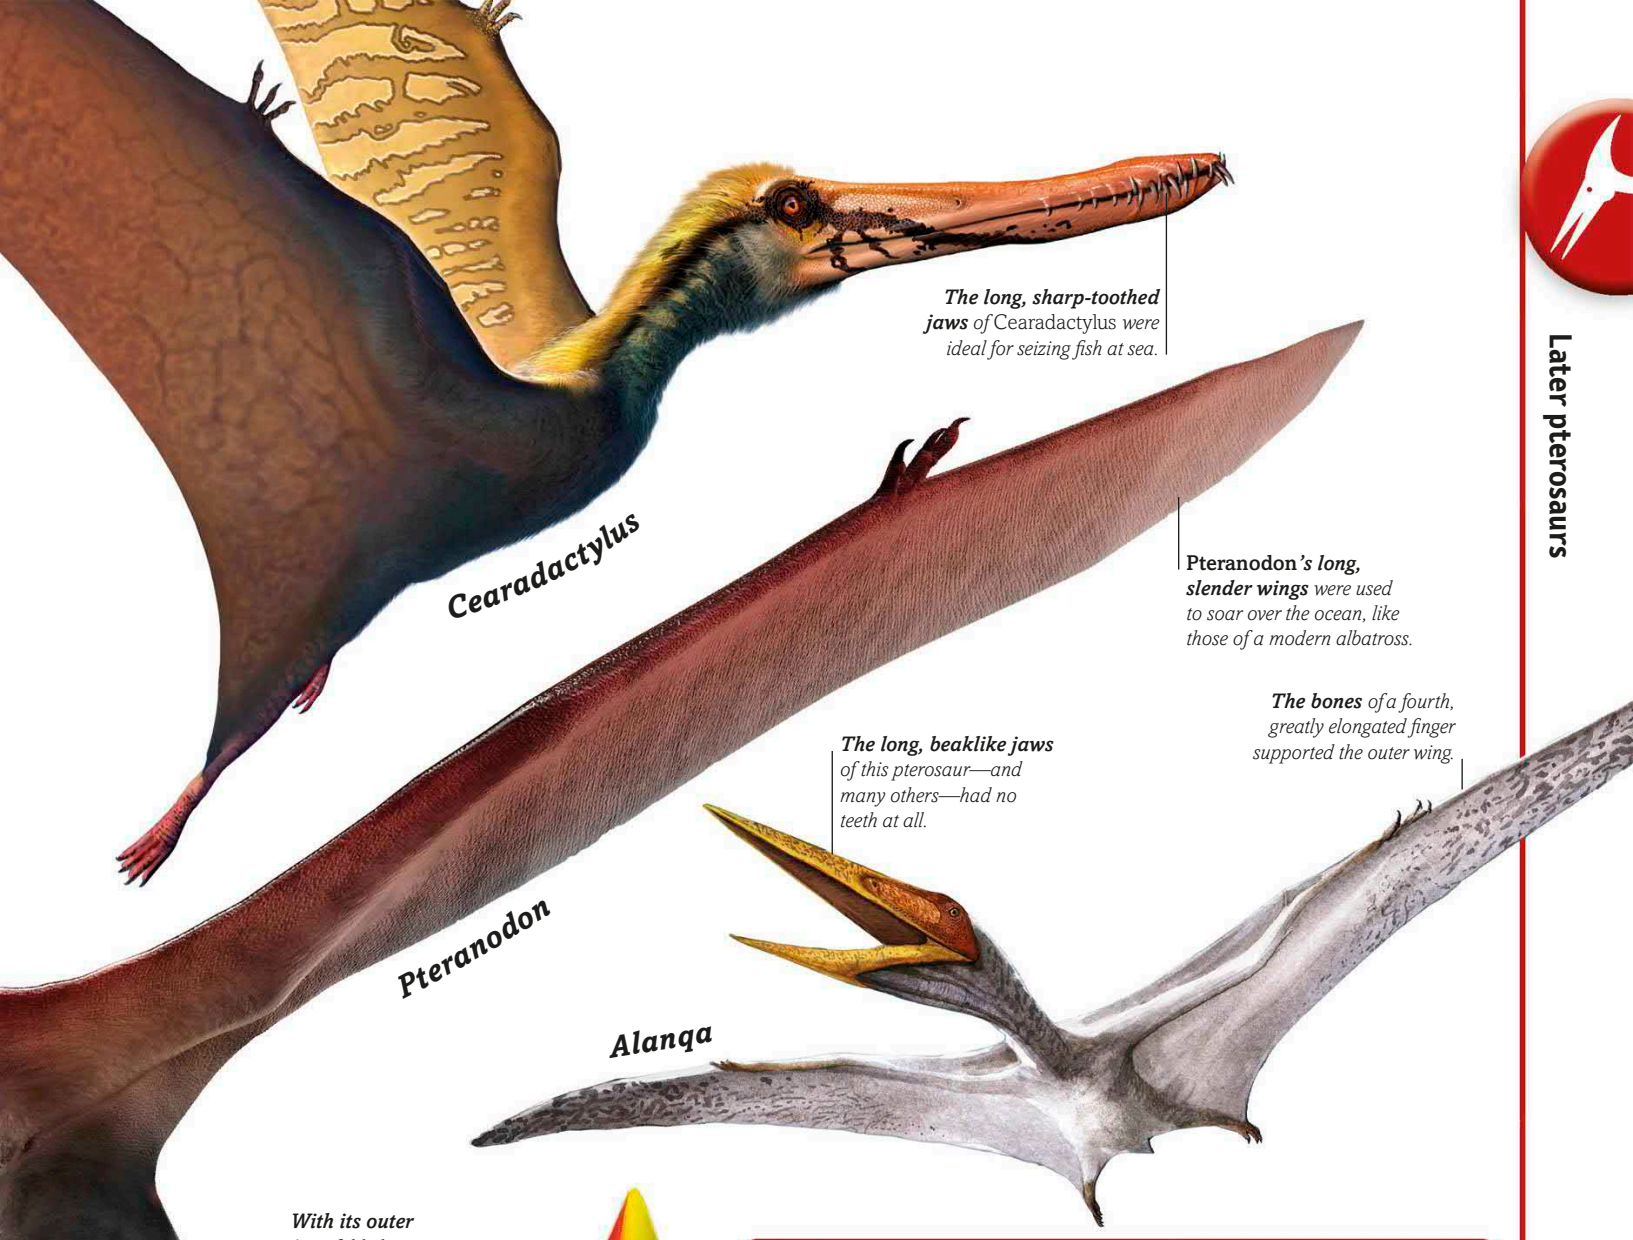

HOW PTEROSAURS EVOLVED

Early pterosaurs were typically crow-sized animals with long, bony tails, short necks, and powerful jaws bristling with pointed teeth. During the Jurassic Period, they gradually gave way to bigger, short-tailed pterosaurs with longer necks and long, often toothless jaws. Many of these later pterosaurs also had spectacular crests on their heads.

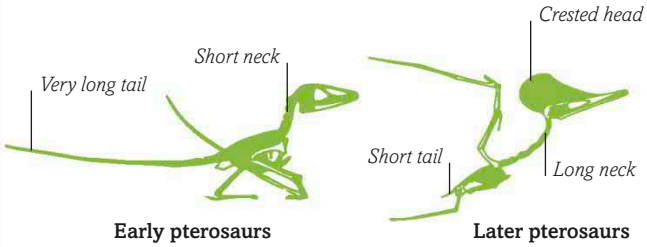

able to swim on the ocean surface like seabirds and dive briefly below to catch fish. Many of these later pterosaurs were giants compared to the earlier ones. *Pteranodon* had a wingspan of more than 23 ft (7 m), and the biggest of all—*Quetzalcoatlus* and *Hatzegopteryx*—were the size of small aircraft, with wingspans of 33 ft (10 m) or more. These were the largest flying animals that ever lived, and all the evidence suggests that they were excellent fliers, able to cover vast distances by soaring on rising air currents like gigantic vultures.

PROWLING PREDATOR

The smaller dinosaurs that lived in North America 70 million years ago often fell prey to tyrannosaurs, but they also faced danger from another direction—the air. High above them, the skies were patrolled by *Quetzalcoatlus*, a gigantic pterosaur that would have soared in circles on rising air currents like a huge bird of prey, watching for a chance to seize a meal.

Quetzalcoatlus was superbly adapted for flight and had excellent eyesight for targeting prey from long range. But it did not have powerful claws for seizing prey from the air. So it probably landed first, folded up its long outer wings, and stalked on all fours through the undergrowth in search of food. As tall as a giraffe, *Quetzalcoatlus* could stand with its head well clear of any bushes or small trees. Its long neck and jaws also gave it a very long reach, so it could ambush animals from cover before they knew they were being watched. Since *Quetzalcoatlus* lacked teeth or a hooked beak, it could not tear prey apart, but it was big enough to swallow dinosaurs like this baby titanosaur whole.

Colorful crests

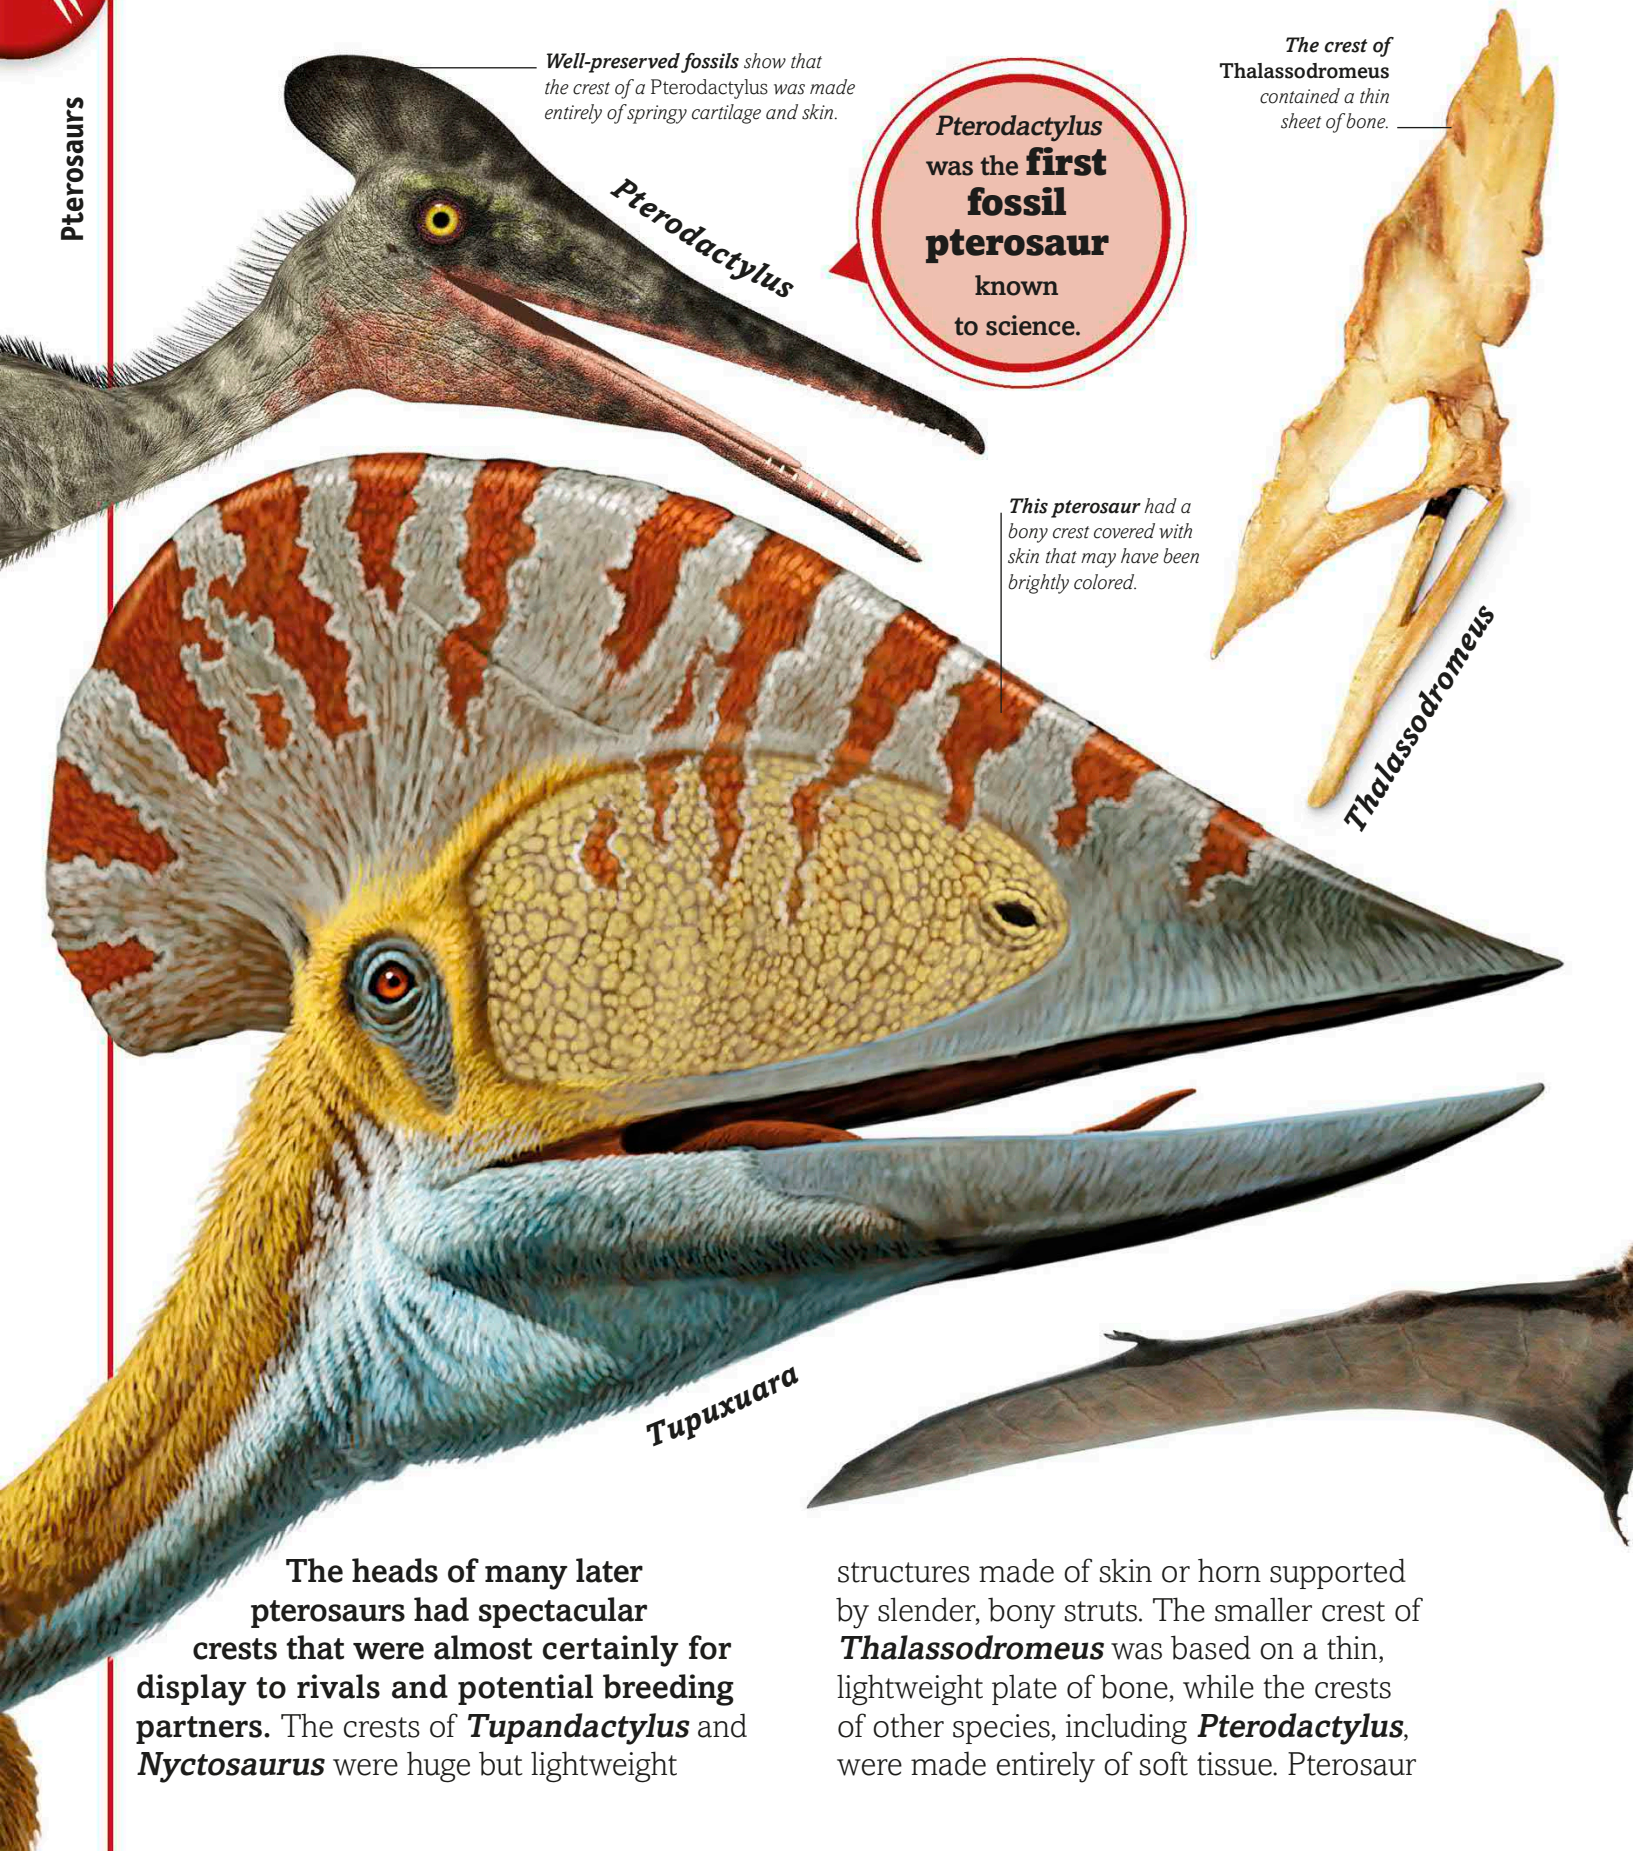

The heads of many later pterosaurs had spectacular crests that were almost certainly for display to rivals and potential breeding partners. The crests of ***Tupandactylus*** and ***Nyctosaurus*** were huge but lightweight structures made of skin or horn supported by slender, bony struts. The smaller crest of ***Thalassodromeus*** was based on a thin, lightweight plate of bone, while the crests of other species, including ***Pterodactylus***, were made entirely of soft tissue. Pterosaur

POMP AND SHOW

Many complete skeletons of *Pteranodon* have been found, and by examining the pelvic bones, scientists can distinguish between males and females. The males have larger crests, which shows they were important in courtship, like the decorative feathers of birds such as peacocks.

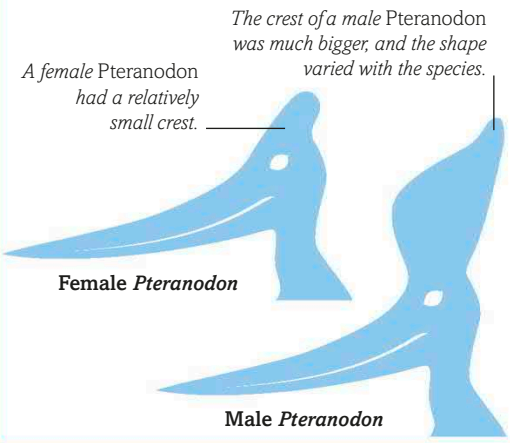

A forked, bony strut *extended high above* Nyctosaurus*'s skull—it was three times as long as the skull itself.*

Nyctosaurus

The enormous crest of **Tupandactylus** *was the largest of any known pterosaur, but it would not have weighed much.*

Tupandactylus

This huge pterosaur *probably had a shallow crest on top of its very long skull.*

The toothless beak *was up to 8 ft (2.5 m) long—a record for a land animal.*

Hatzegopteryx

Tropeognathus

Some pterosaurs *had crests of bone on their jaws.*

crests were probably vividly colored—photographs of one fossil taken using ultraviolet light show distinct traces of color banding. For most pterosaurs, it is not possible to say whether males and females both had crests, but in the case of *Pteranodon*, it is clear that fossil skulls with the biggest crests belonged to males, while those with smaller crests were females. Such gender differences are common in modern birds. Male peacocks, for instance, have longer tails and brighter colors than females.

THE MARINE WORLD

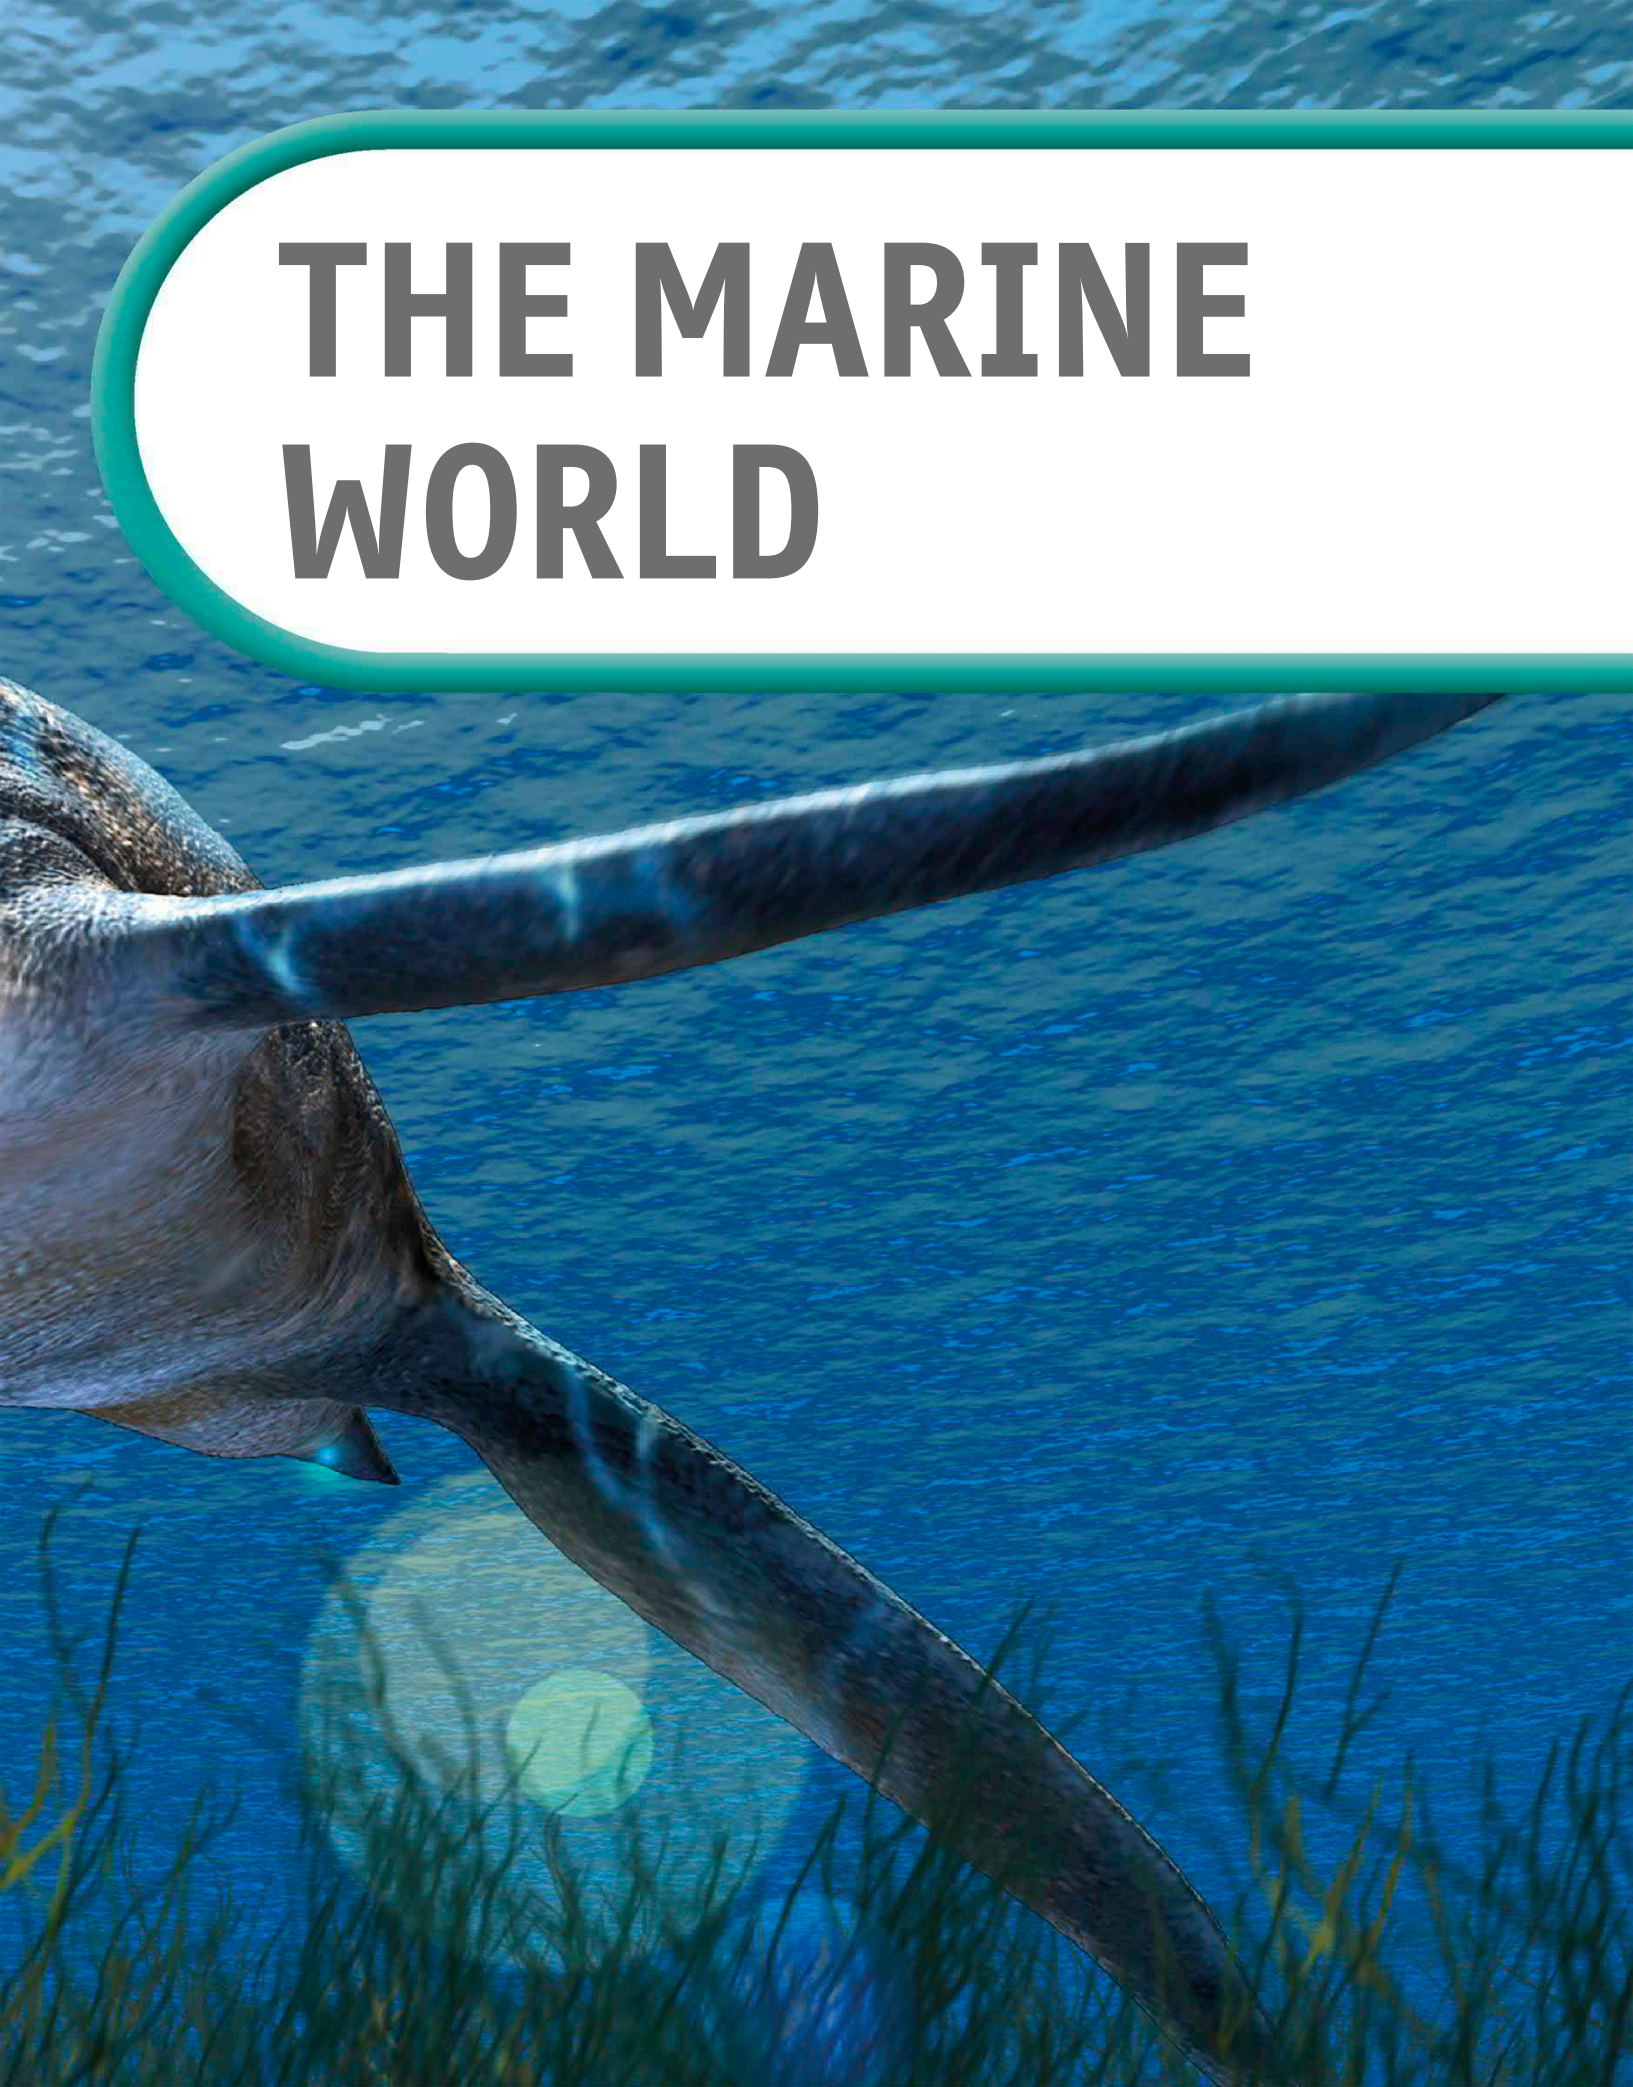

Life in Mesozoic seas

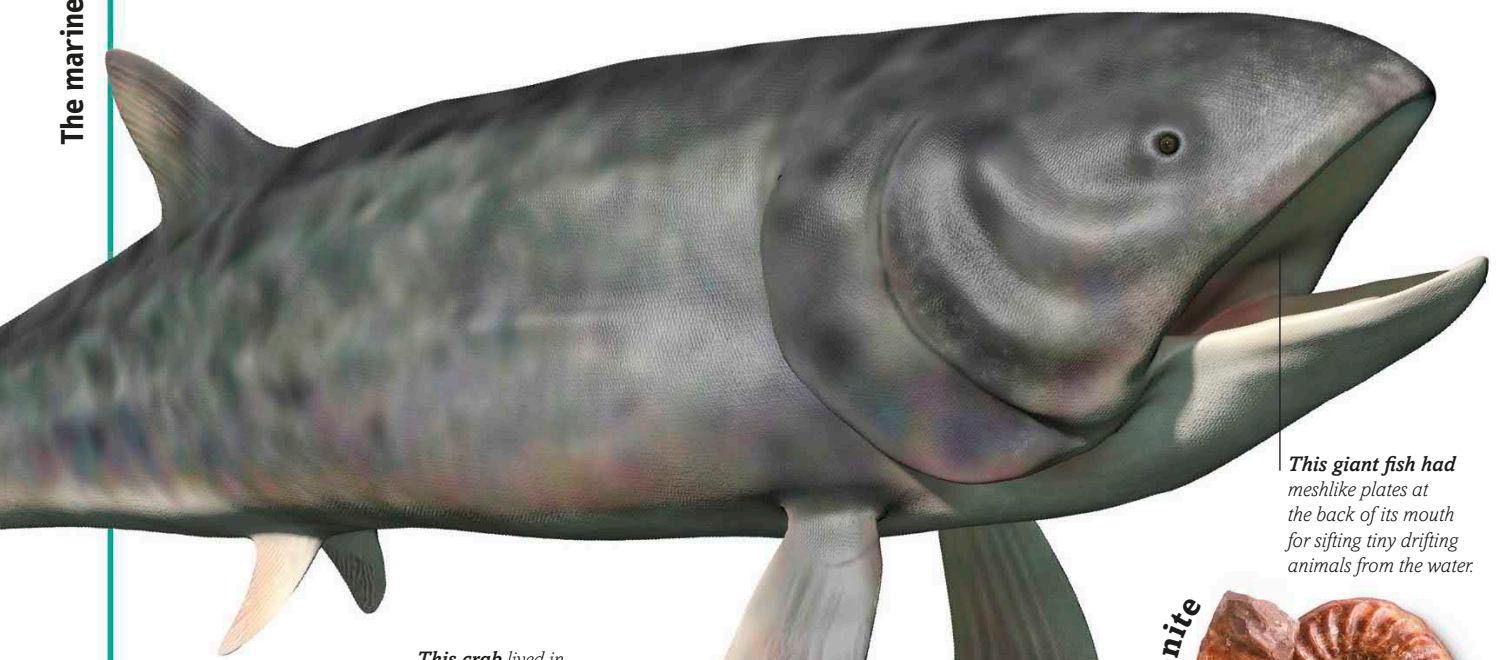

This giant fish had *meshlike plates at the back of its mouth for sifting tiny drifting animals from the water.*

Leedsichthys

Ammonite

The coiled shell *protected the ammonite's soft body.*

The shell *was more than 2 in (5 cm) across.*

This crab *lived in warm, shallow seas about 80 million years ago.*

Crab fossil

Sea snail fossil

This fossil *shows the protective spiral shell made of hard, chalky minerals absorbed from seawater.*

LARGEST FISH

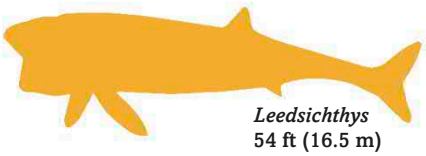

Leedsichthys
54 ft (16.5 m)

Longer than a school bus, and with a weight to match, *Leedsichthys* was one of the largest fish that has ever lived.

Bus 36 ft (11 m)

The Paleozoic Era—the age of ancient life—ended 251 million years ago with a devastating mass extinction of life. This event was so extreme that it destroyed about 96 percent of all marine species. During the centuries that followed—the earliest years of the Mesozoic age of dinosaurs—the oceans would have been almost lifeless. But some animals survived and started to multiply, taking advantage of all the empty space. It took about 5 million years for the real recovery to begin, as the surviving marine animals evolved into

A seabed dweller, *this crinoid used its petal-like arms to filter food from seawater.*

The long stem *at the base of its body was attached to a hard surface.*

Crinoid fossil

The streamlined body *of this squidlike mollusk probably made it a fast swimmer.*

Belemnite

Like a squid*, the belemnite caught prey with two long, suckered tentacles.*

Although very similar to modern horseshoe crabs*, this one lived at the same time as the giant dinosaurs.*

Horseshoe crab fossil

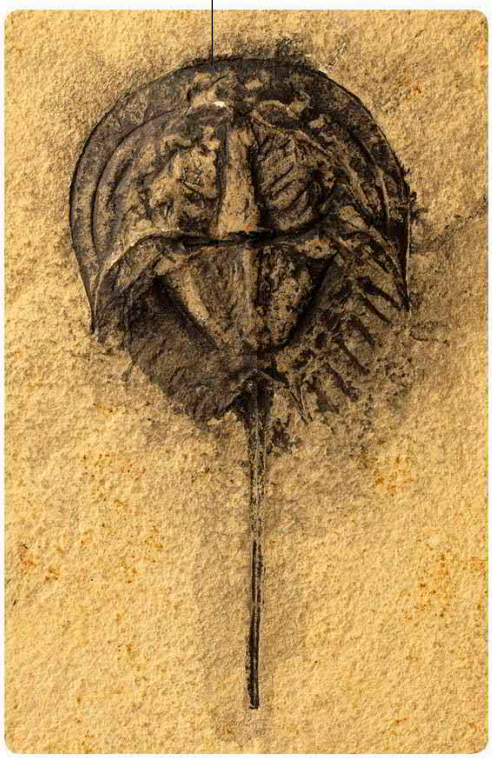

After 150 million years, **shiny scales** are still visible on this amazing fossil.

Fossils *of the 6-ft- (1.8-m-) long* Lepidotes *have been found throughout the world.*

Lepidotes fossil

Brittlestars *are slender, flexible starfish that have been foraging for food on the seabed for 500 million years.*

Brittlestar fossil

The blunt, teardrop-shaped teeth *were used to break open shellfish.*

many new forms. These included **fish**, sharks, and marine reptiles, as well as invertebrates such as shelled mollusks, **crabs**, and **starfish**. Hard-shelled invertebrates in particular were common and have been fossilized in large numbers. They included **ammonites** and **belemnites**, both of which were relatives of squid. They perished in the mass extinction that ended the Mesozoic Era and destroyed the giant dinosaurs. But other types of sea creature survived and still flourish in the world's oceans.

Early marine reptiles

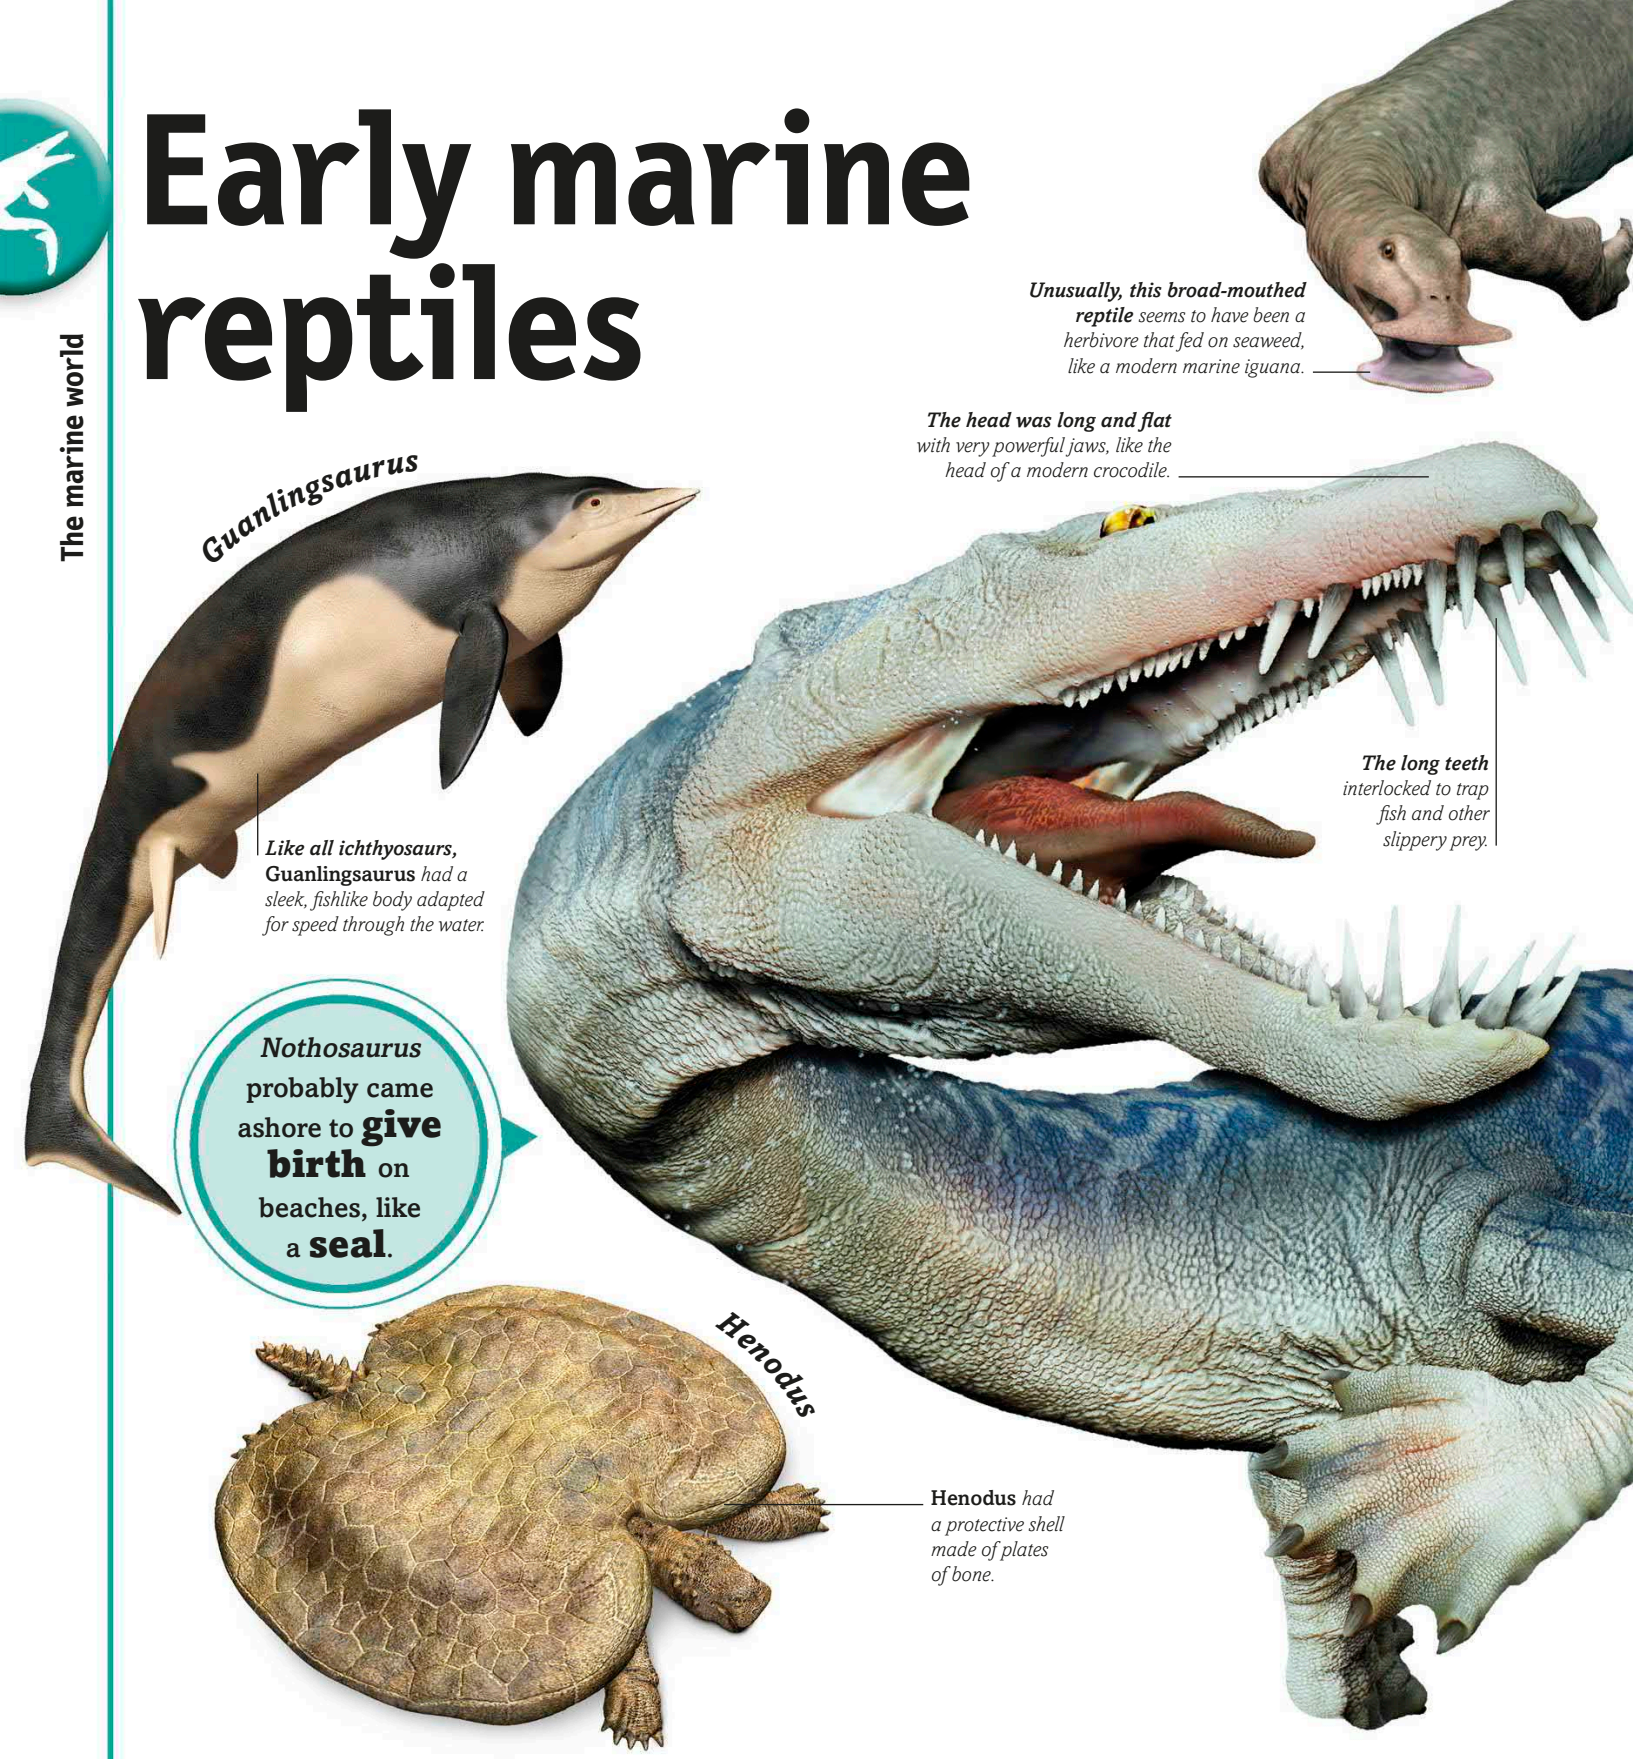

The fish and other sea animals that lived during the time of the dinosaurs were preyed on by reptiles that were specially adapted for life in the oceans. These reptiles started becoming common in the ocean about 245 million years ago, in the Triassic Period, and rapidly evolved a variety of adaptations for eating different kinds of food. Four-legged placodonts like ***Placodus*** searched the seabed for hard-shelled clams and similar shellfish, and other reptiles including ***Atopodentatus*** grazed on seaweed.

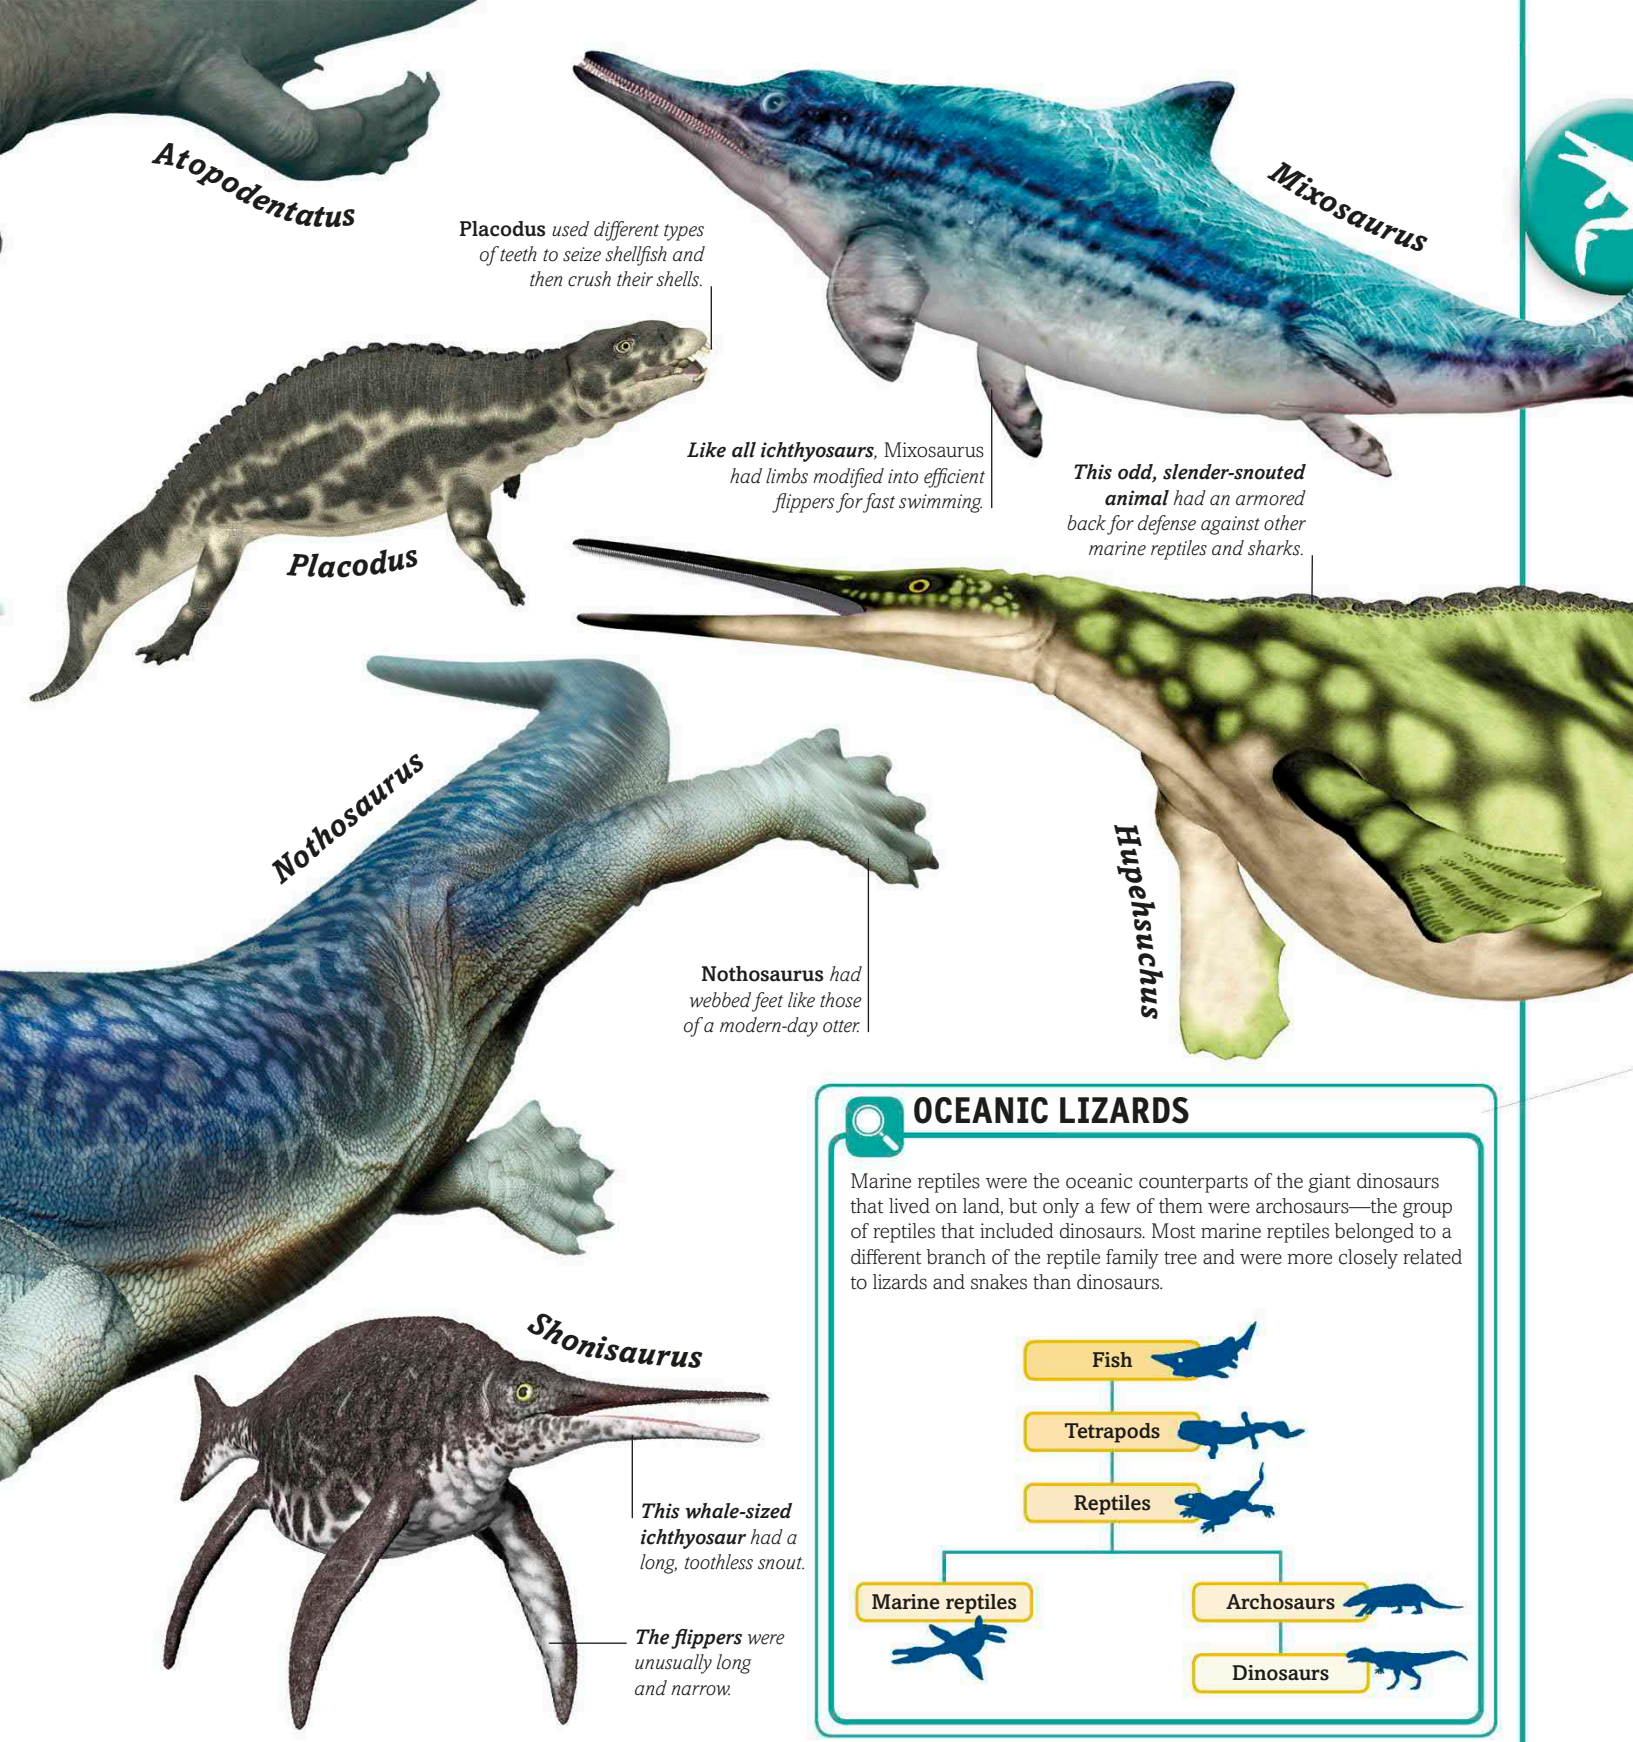

OCEANIC LIZARDS

Marine reptiles were the oceanic counterparts of the giant dinosaurs that lived on land, but only a few of them were archosaurs—the group of reptiles that included dinosaurs. Most marine reptiles belonged to a different branch of the reptile family tree and were more closely related to lizards and snakes than dinosaurs.

Equipped with sharp-pointed teeth, the crocodilelike ***Nothosaurus*** preyed on other marine animals, as well as fish. Most of these early marine reptiles had legs and probably lived partly on the shore, like seals. But the dolphinlike ichthyosaurs—animals like ***Mixosaurus*** and ***Shonisaurus***—were fully adapted to live permanently at sea, even though they had to breathe air. Their streamlined bodies and powerful tails were similar to those of sharks, enabling them to swim very fast in pursuit of fish.

Flippers and tails

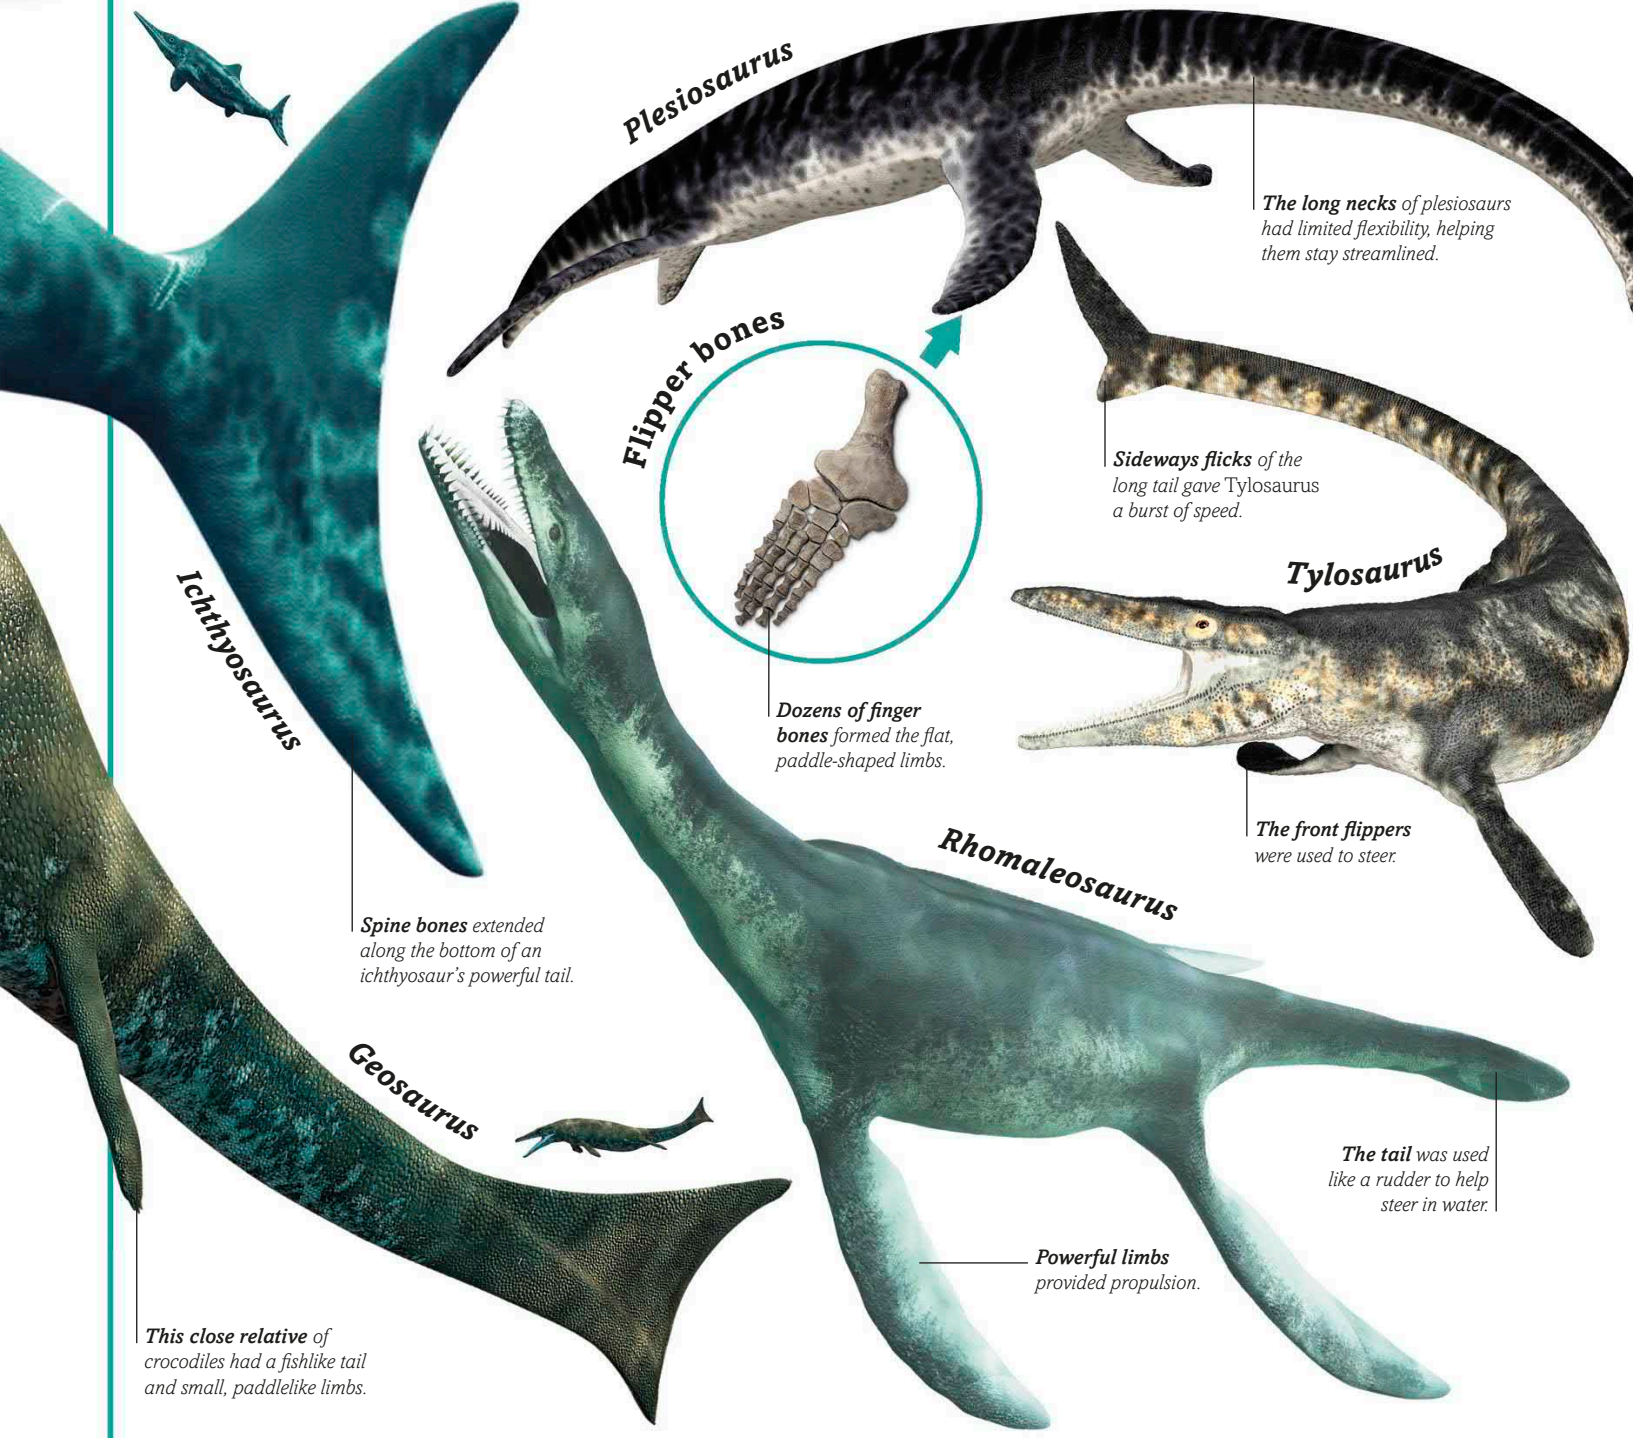

Many kinds of prehistoric reptiles gave up life on land to live in the ocean. Just as marine mammals like seals and whales would do later, they adapted to life in water by becoming streamlined and slippery and using their limbs as flippers. ***Nothosaurus*** had paddlelike, webbed feet for swimming, but it could also haul itself onto land to breed, as seals do. Other marine reptiles were fully aquatic and probably more agile in the water. ***Plesiosaurus*** and its shorter-necked relative ***Rhomaleosaurus*** propelled themselves through water by rowing

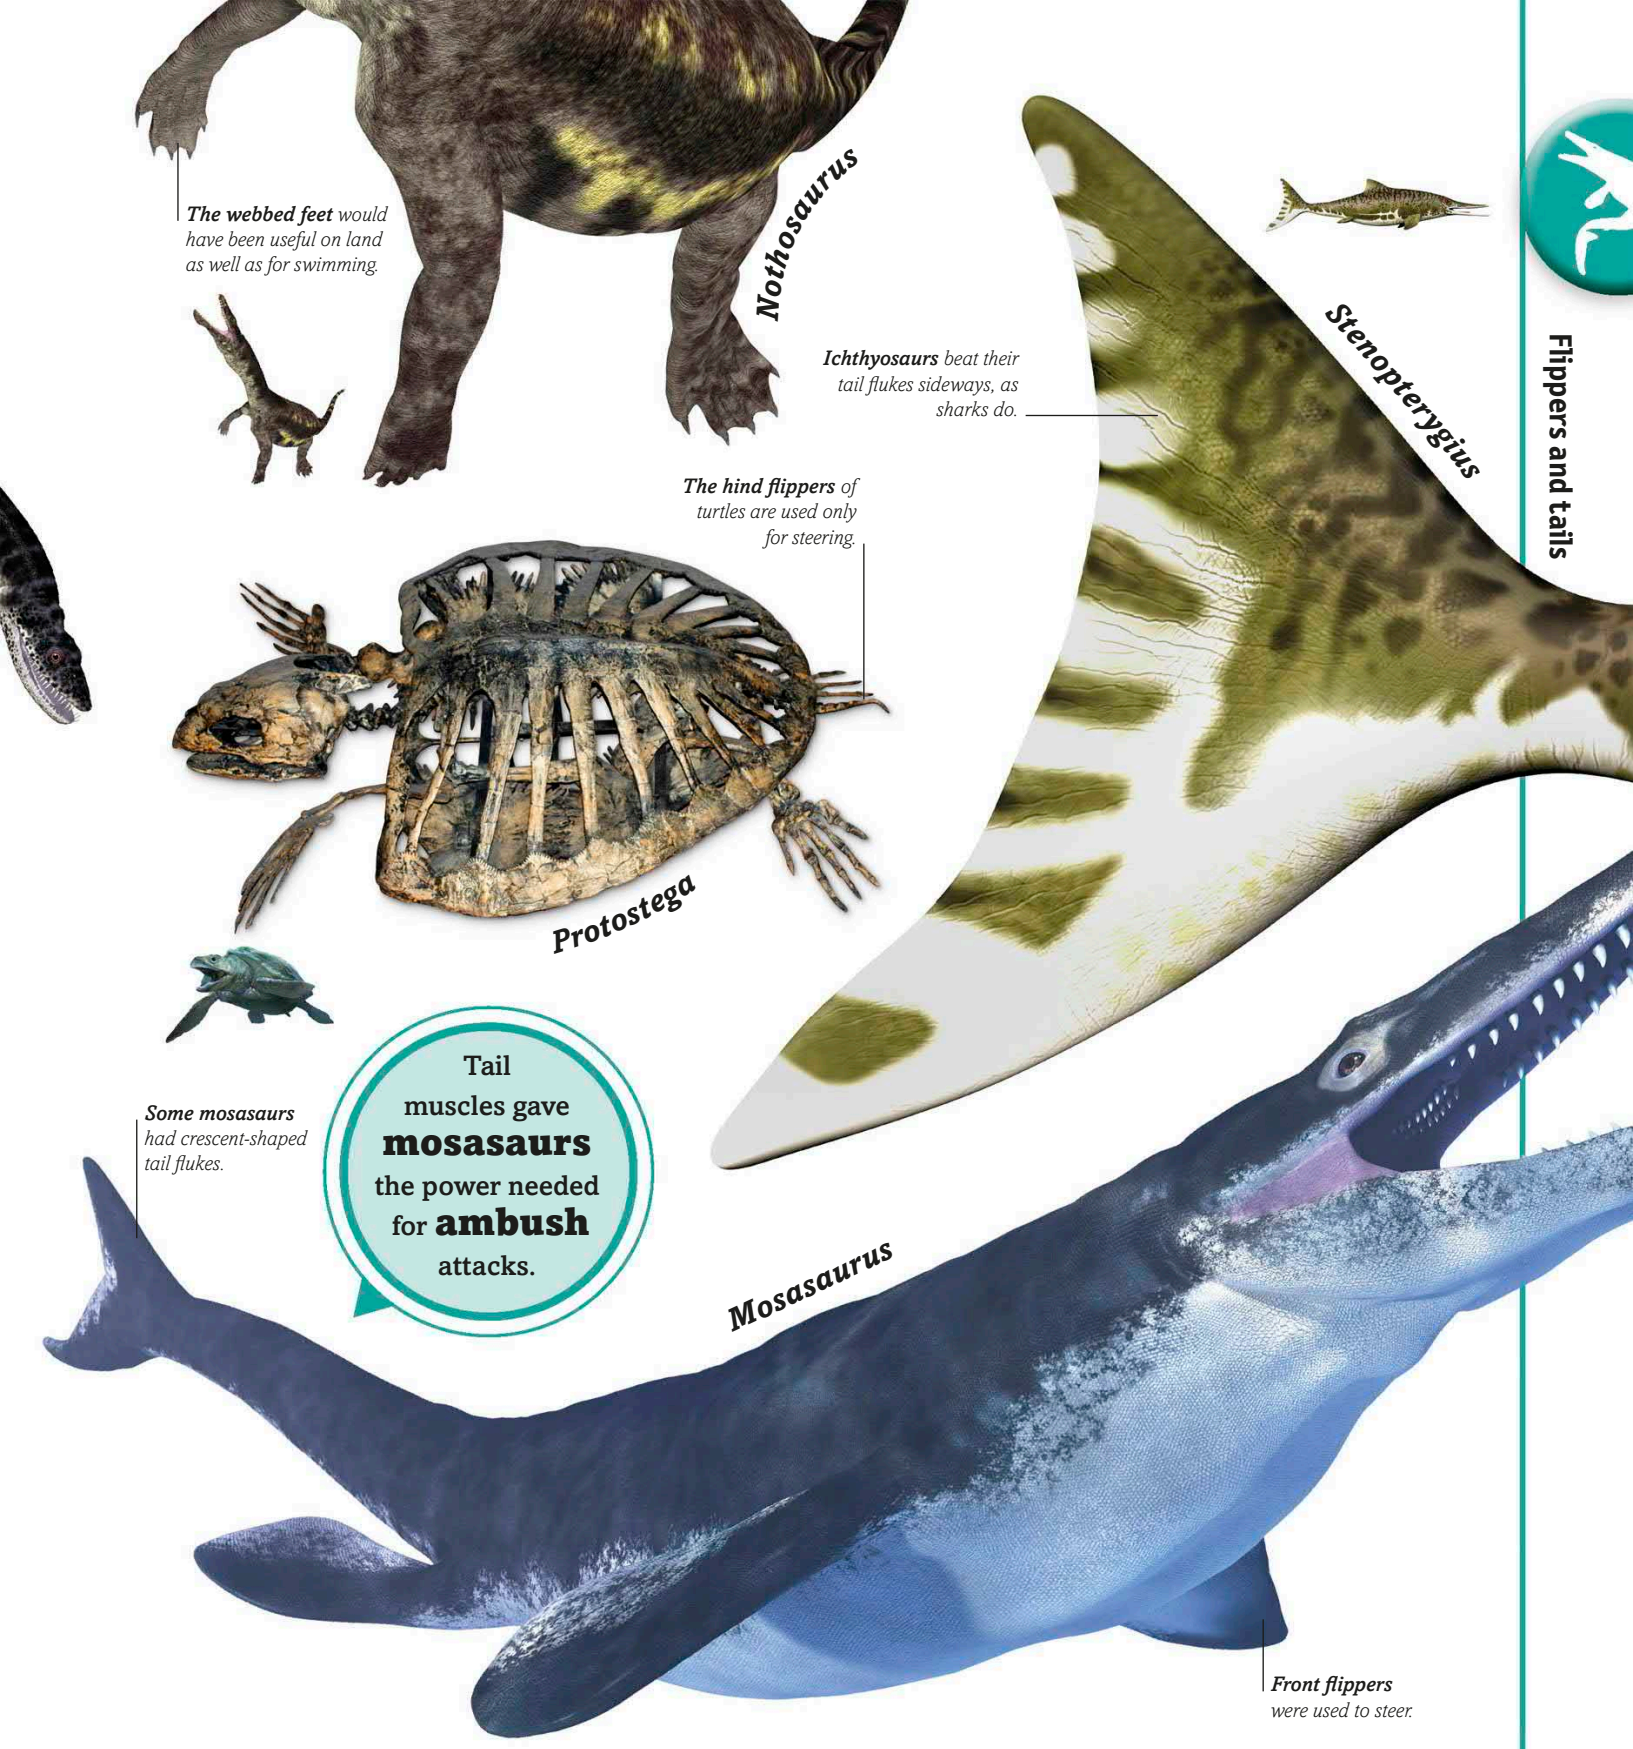

or flapping their winglike flippers. Whether they used all four for propulsion or just the front ones for propulsion and rear pair for steering (like turtles) is unclear. The fastest swimmers of the reptile world were ichthyosaurs, such as ***Ichthyosaurus*** and ***Stenopterygius***. They beat their sharklike tail flukes sideways for thrust and steered with their flippers. Early mosasaurs had flattened, crocodilelike tails that they swept from side to side to drive themselves through water. Later ones like ***Mosasaurus*** evolved tail flukes for greater efficiency.

Giant marine reptiles

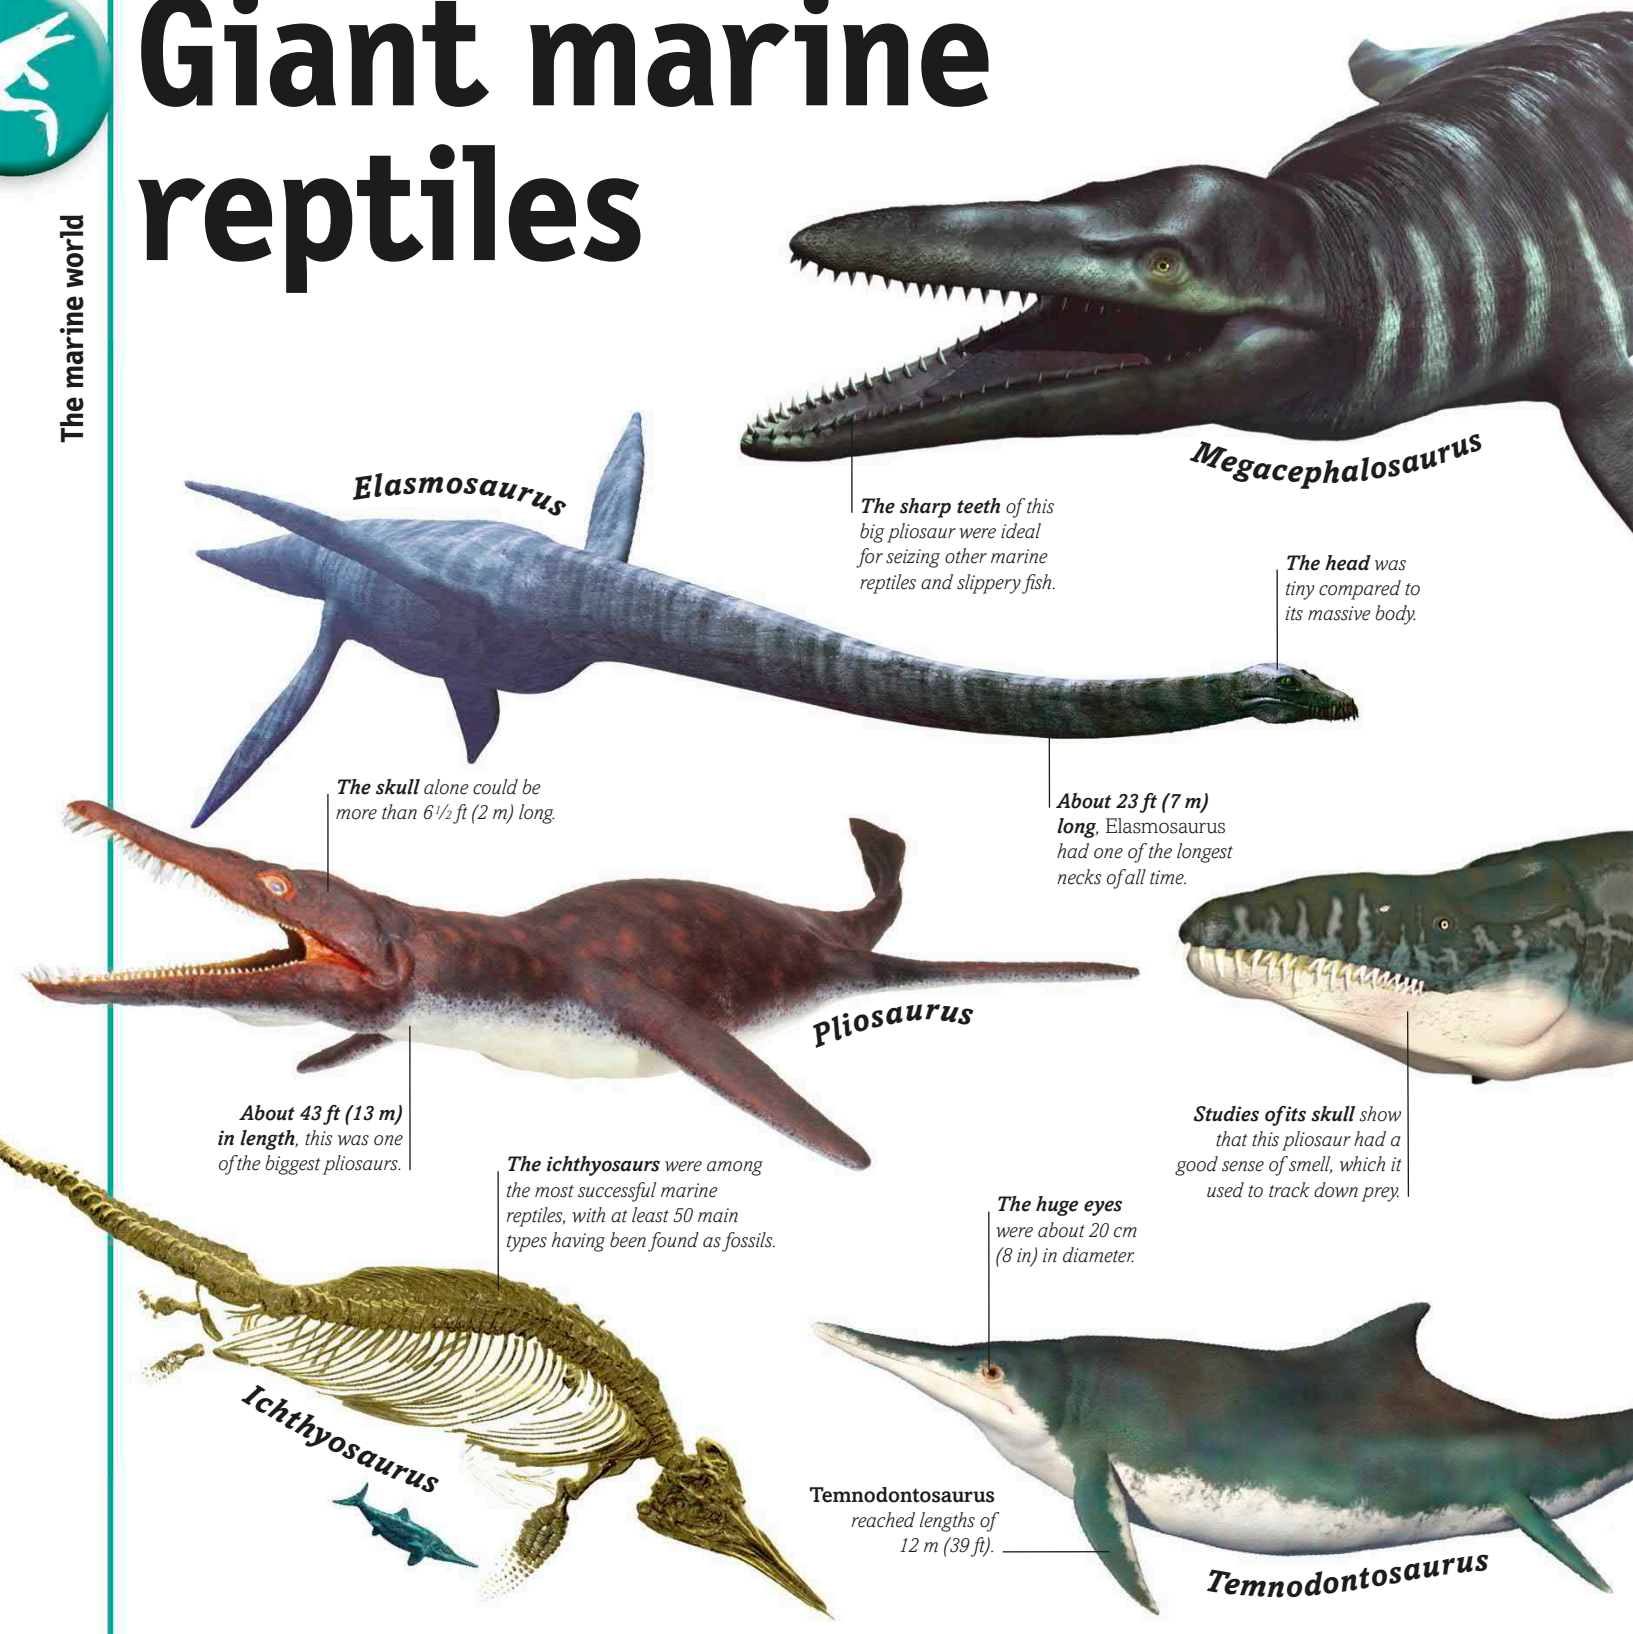

Reptiles flourished in the oceans during the Triassic Period. But about 200 million years ago, the Triassic Period came to an end with a mass extinction that destroyed many of the spectacular reptiles that had ruled the seas. The survivors took a long time to recover, but over the next 135 million years they evolved into some of the most powerful predators that have ever existed. Some, like ***Dakosaurus***, resembled crocodiles but were specialized for life at sea. ***Ichthyosaurus*** and its giant relative ***Temnodontosaurus*** were

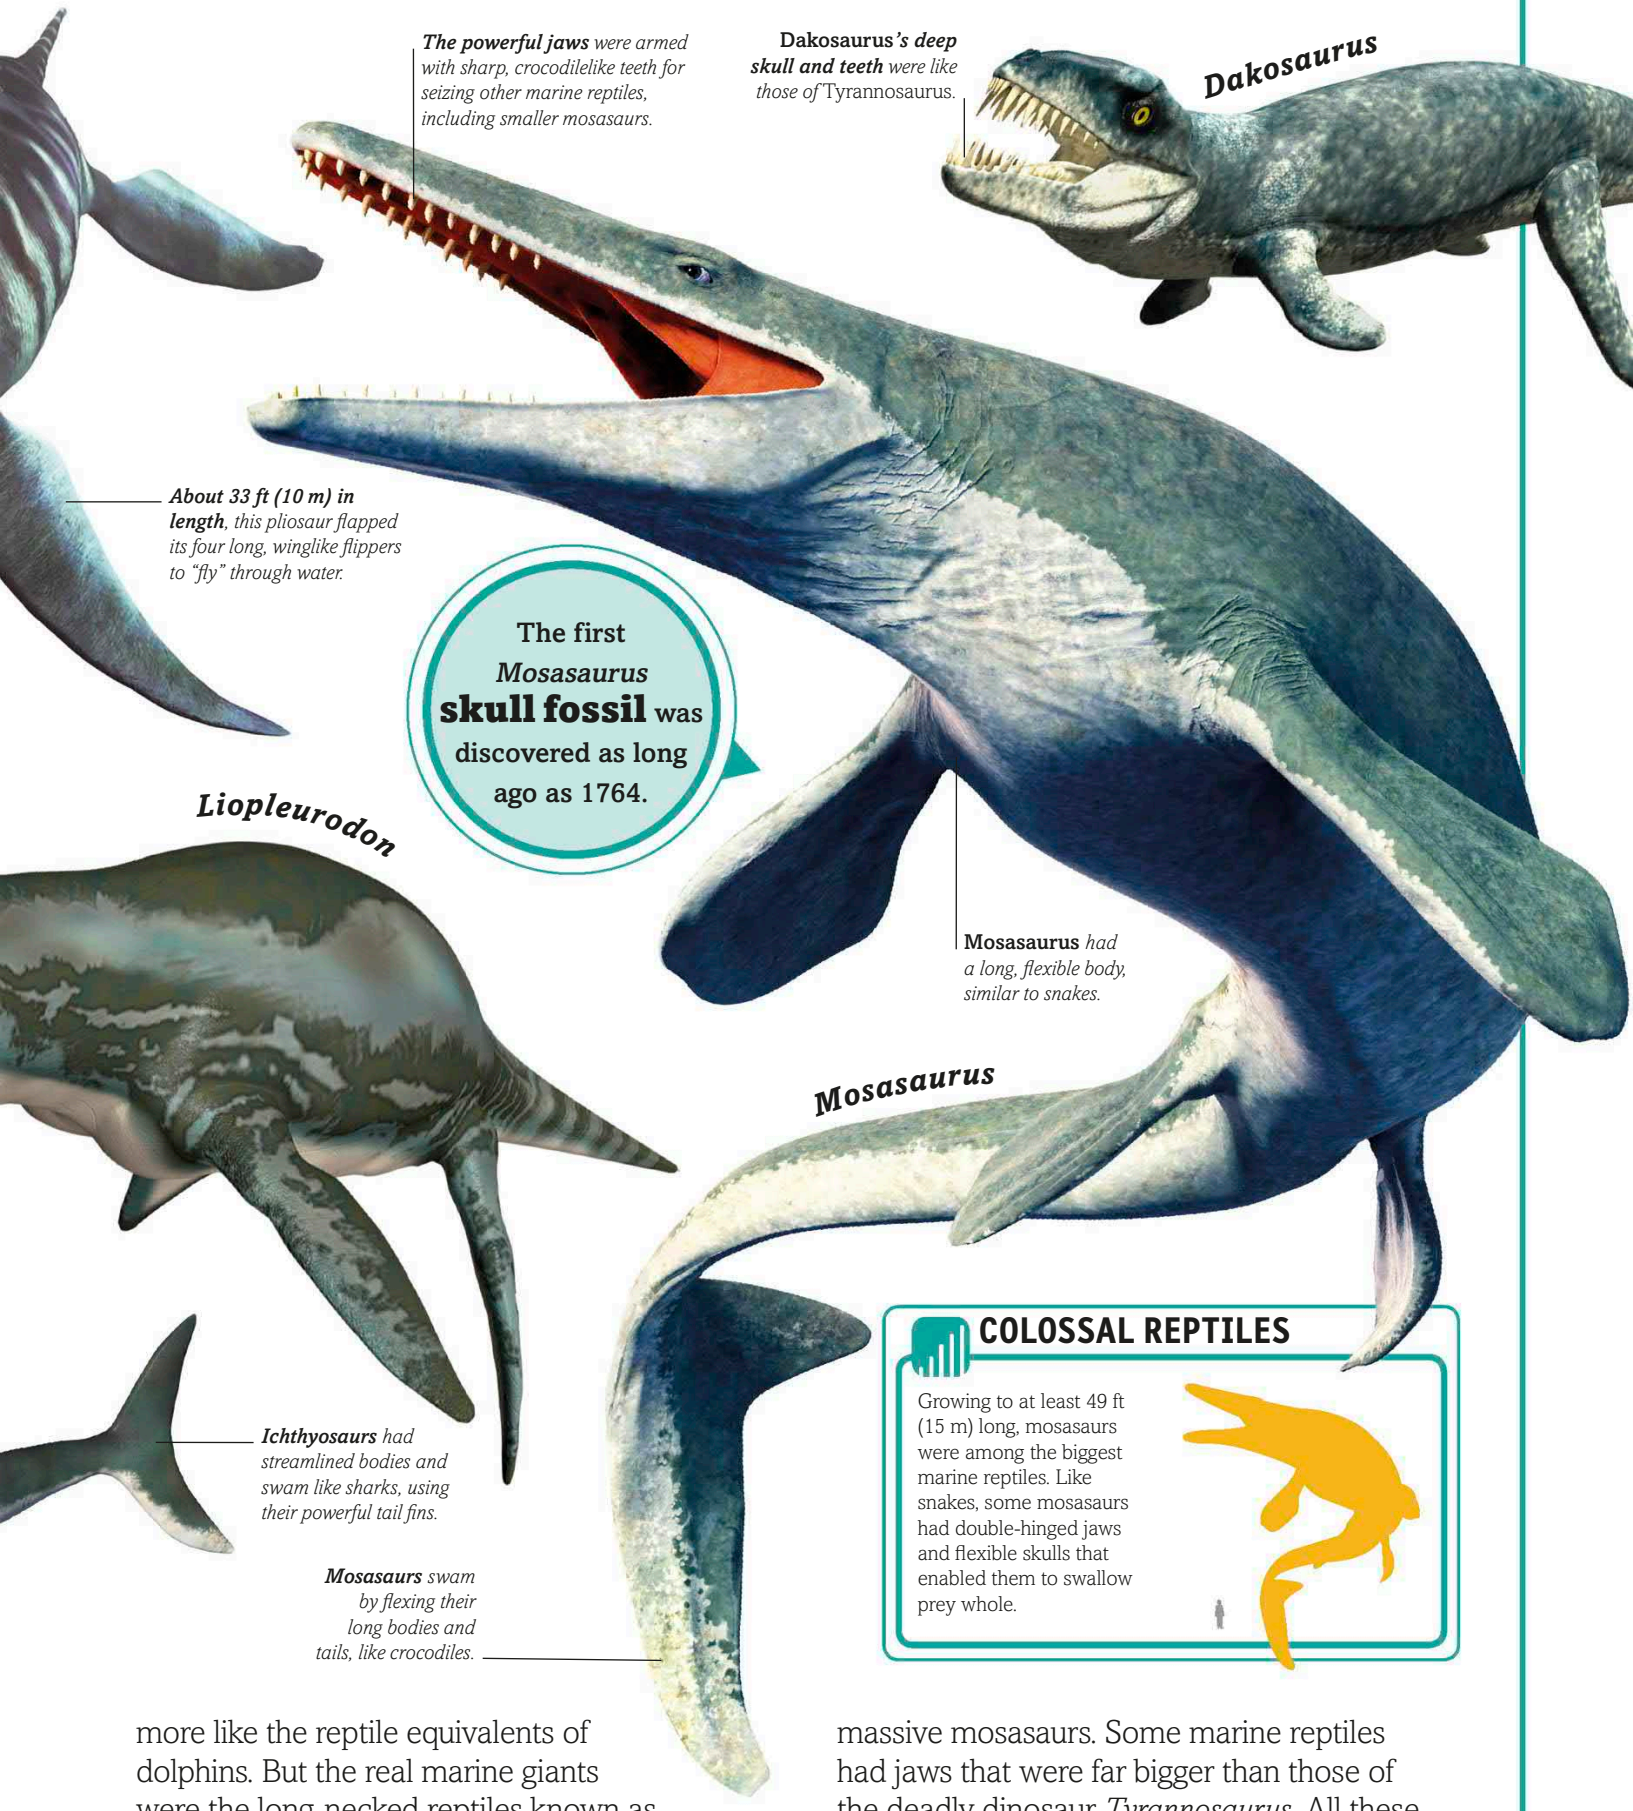

COLOSSAL REPTILES

Growing to at least 49 ft (15 m) long, mosasaurs were among the biggest marine reptiles. Like snakes, some mosasaurs had double-hinged jaws and flexible skulls that enabled them to swallow prey whole.

more like the reptile equivalents of dolphins. But the real marine giants were the long-necked reptiles known as plesiosaurs, which included ***Elasmosaurus***, as well as the short-necked, fearsome pliosaurs like ***Liopleurodon***, and the massive mosasaurs. Some marine reptiles had jaws that were far bigger than those of the deadly dinosaur *Tyrannosaurus*. All these marine reptiles were wiped out 66 million years ago in the mass extinction that killed the giant dinosaurs.

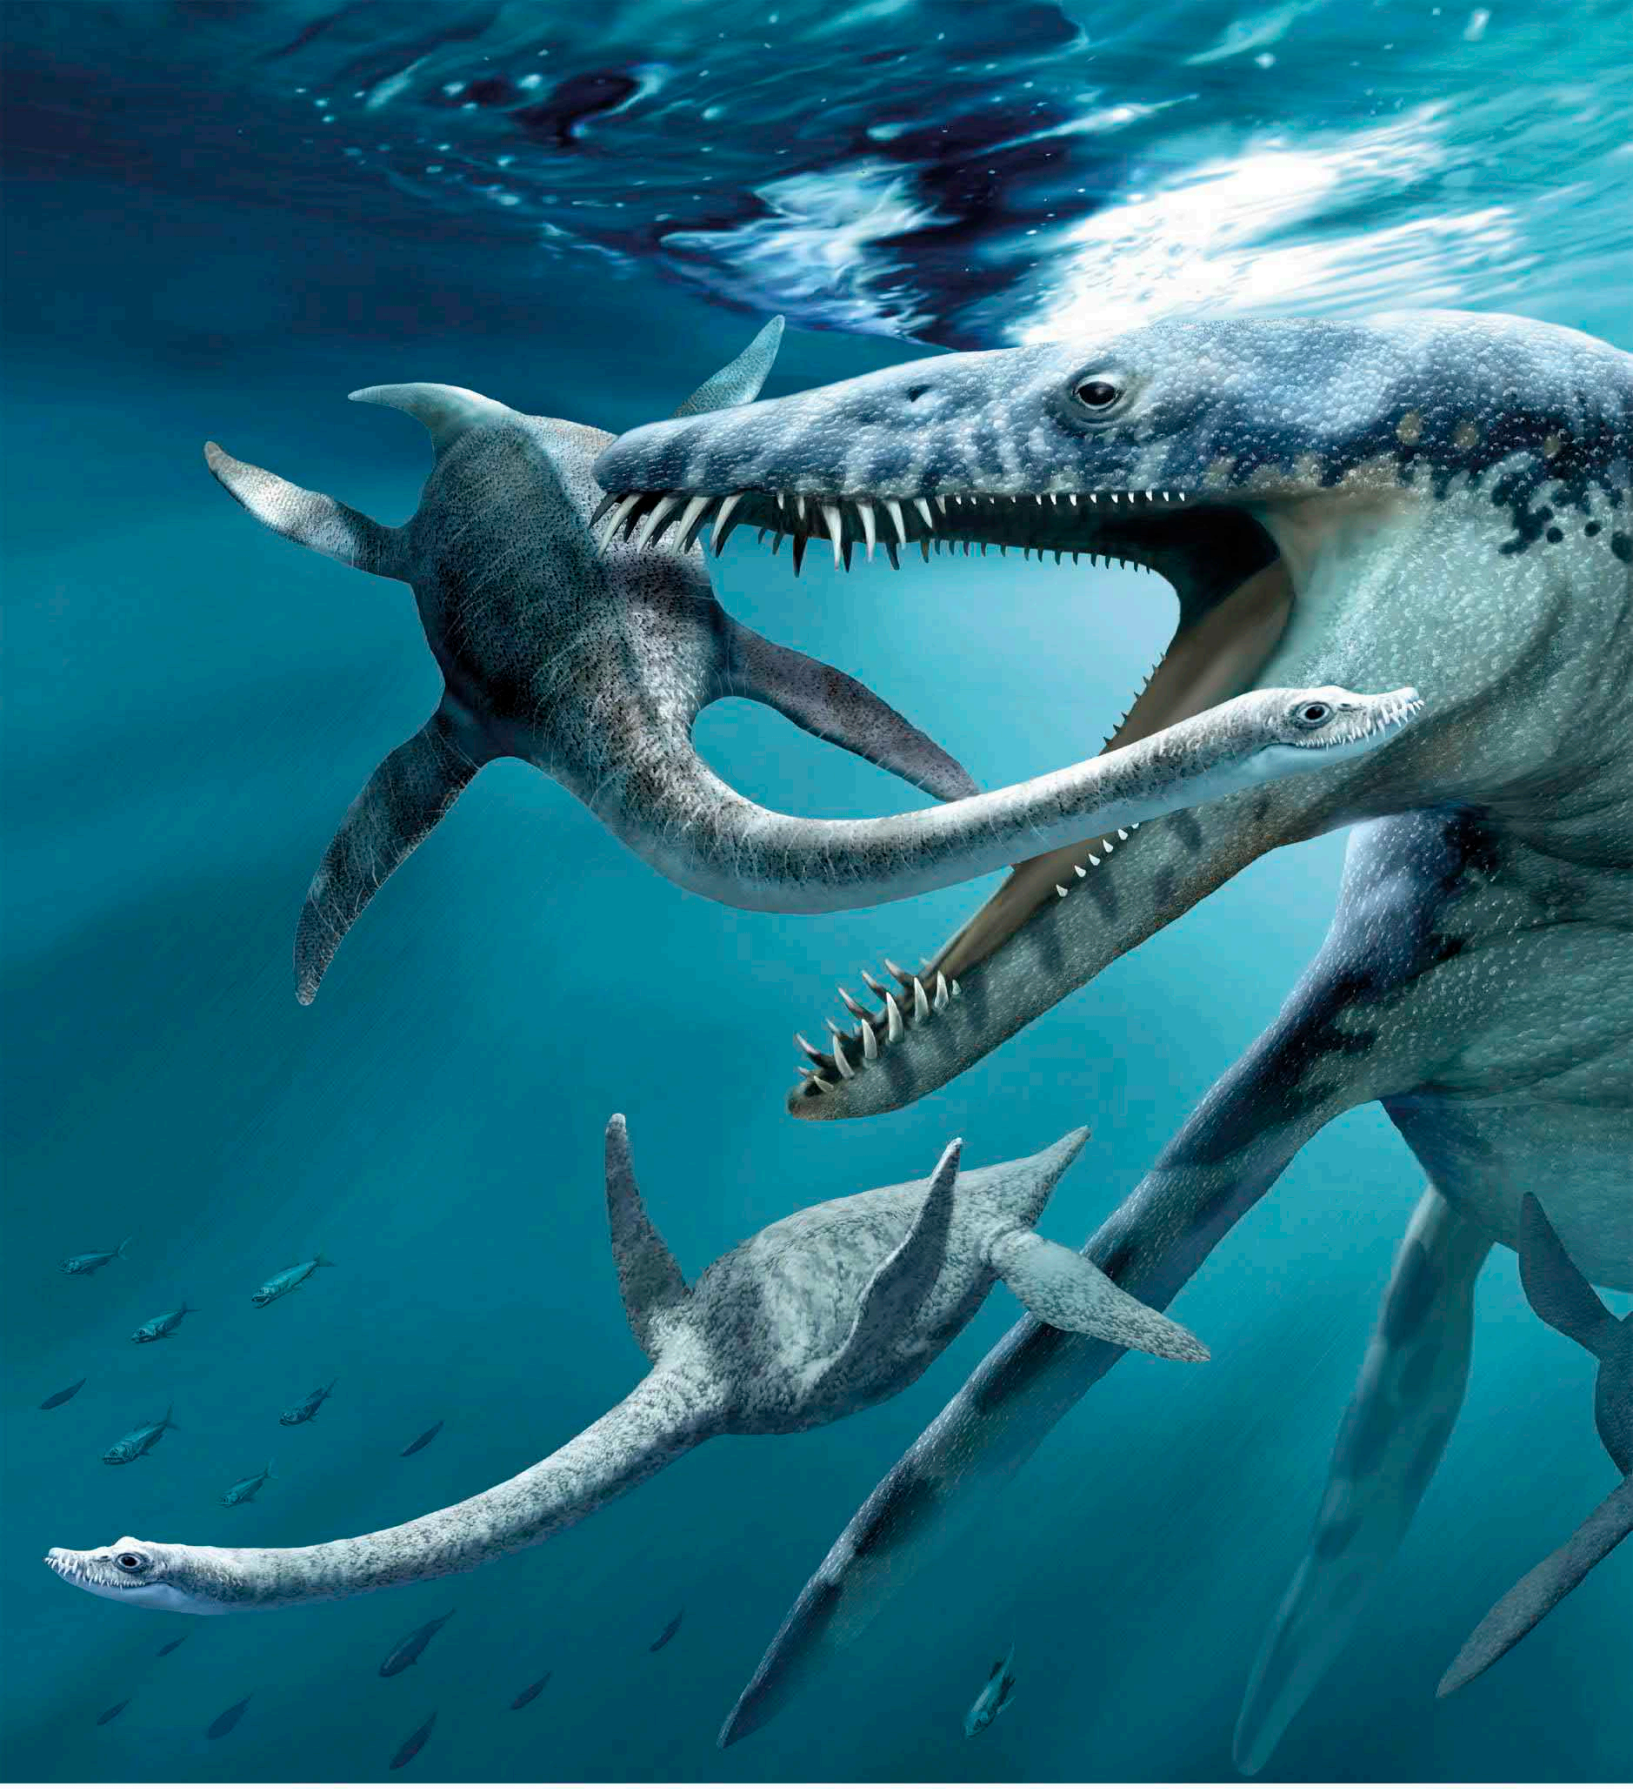

AMBUSH HUNTER

Some of the most deadly hunters that have ever existed lurked in the oceans during the Mesozoic Era. They included the pliosaurs—massive-jawed animals that were specialized for hunting big, powerful prey, including other marine reptiles. *Liopleurodon* was typical of these oceanic predators. About 23 ft (7 m) long and armed with huge, spike-shaped teeth, it had no predators.

Liopleurodon lived in the late Jurassic oceans more than 163 million years ago. It was related to the long-necked plesiosaurs like the ones seen here, but that did not stop it from hunting them. Both these species drove themselves through the water with their long flippers. Experiments using swimming robots have shown that this could have given them tremendous acceleration. *Liopleurodon* may have used this speed as a part of its hunting strategy—lying in wait in the gloomy depths before surging to seize its prey and ripping it apart, although it could probably swallow this plesiosaur whole. A successful, formidable predator, *Liopleurodon* existed for nearly 10 million years.

THE RISE OF MAMMALS

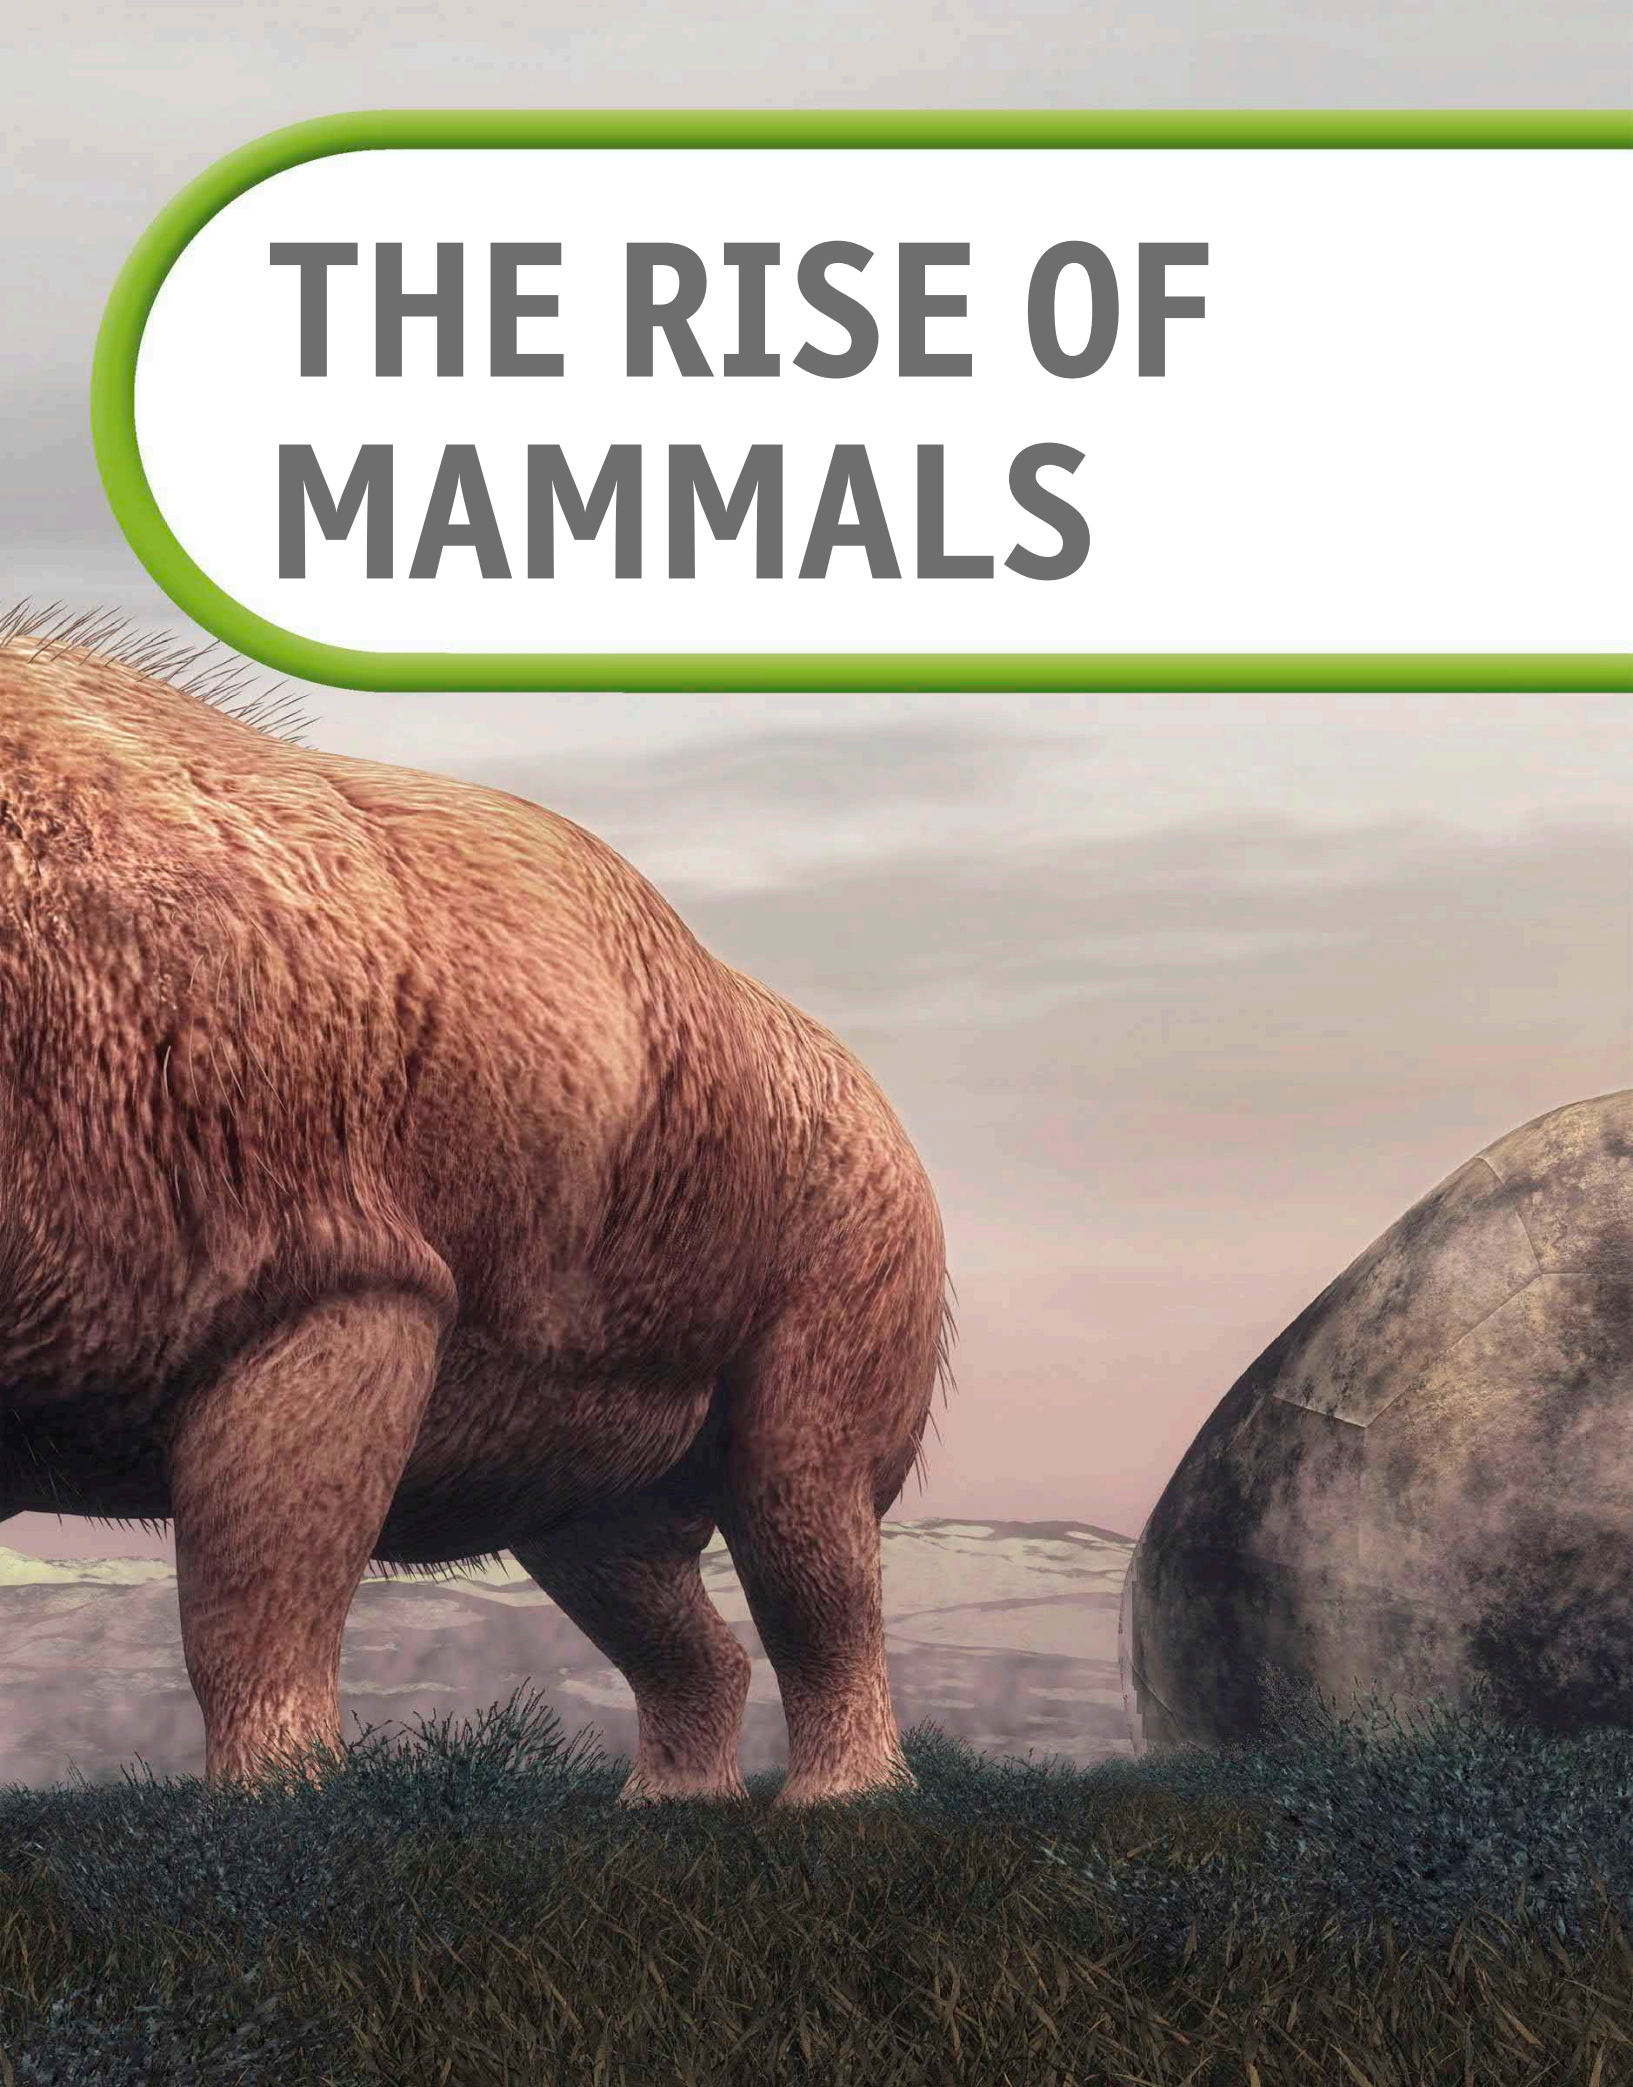

A new world

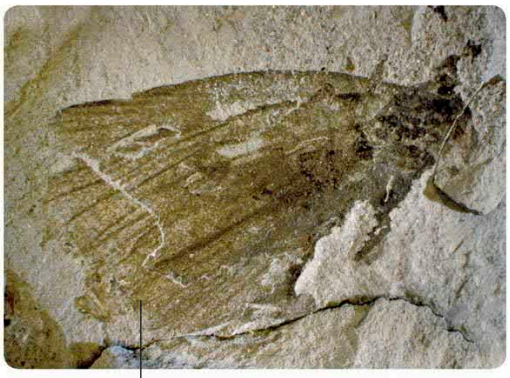

Butterfly fossil

This nectar-feeding butterfly *was found fossilized in rocks more than 50 million years old.*

The dawn redwood *is almost identical to conifers that lived 150 million years ago, which provided food for giant dinosaurs.*

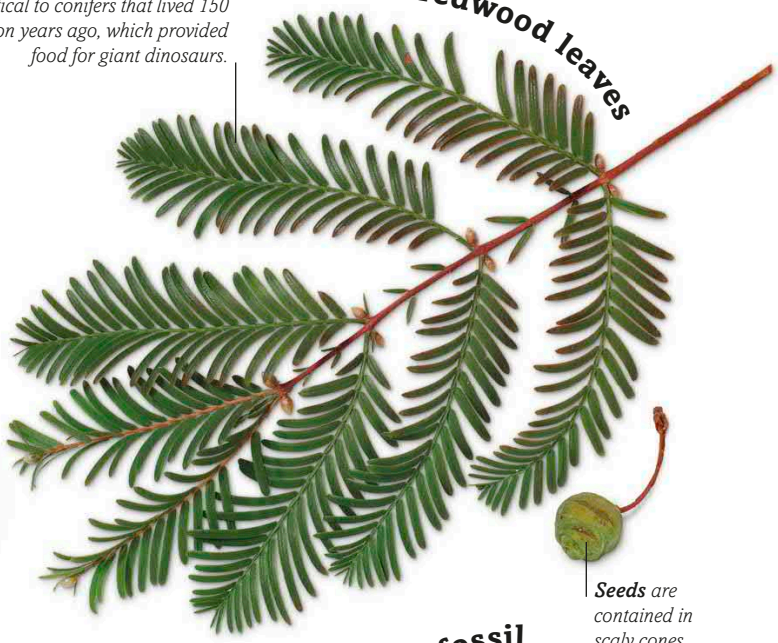

Dawn redwood leaves

Seeds *are contained in scaly cones.*

Magnolia

Still thriving today, *magnolia flowers first blossomed more than 130 million years ago.*

About 20 million years ago*, this bee was sipping nectar and carrying pollen just like a modern honeybee.*

Bee fossil

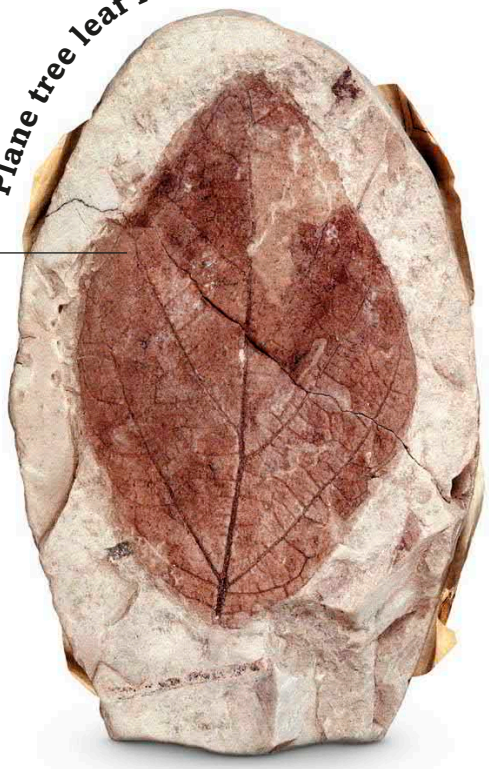

Plane tree leaf fossil

Many fossilized leaves *are like living ones.*

During most of the Mesozoic age of dinosaurs there were no colorful, fragrant flowers to attract insects. The plant world was dominated by the green leaves of ferns, palmlike cycads, and conifer trees. The earliest known flowering plants date from about 140 million years ago. Most of their flowers were small and pollinated by the wind, like grass flowers. But by about 100 million years ago many had big, vibrant flowers like those of **early magnolias** and ***Archaeanthus***, and by the time the dinosaurs were wiped out, the world had

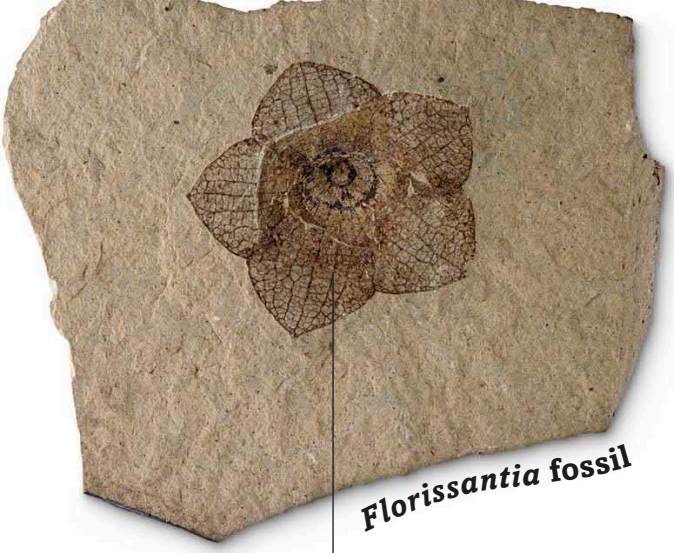

***Florissantia* fossil**

***Formed 49 million years ago**, this fossil has traces of structures that produced sugary nectar.*

Giant winged ant fossil

***Every detail of this queen ant** has been preserved in a fossil that is about 47 million years old.*

***The crushed exoskeleton** of this 50-million-year-old beetle still glitters as it did when alive.*

Jewel beetle fossil

Still around today, **jewel beetles** date back to about 150 million years ago.

Archaeanthus

***These bright petals** would have attracted early pollen-feeding beetles.*

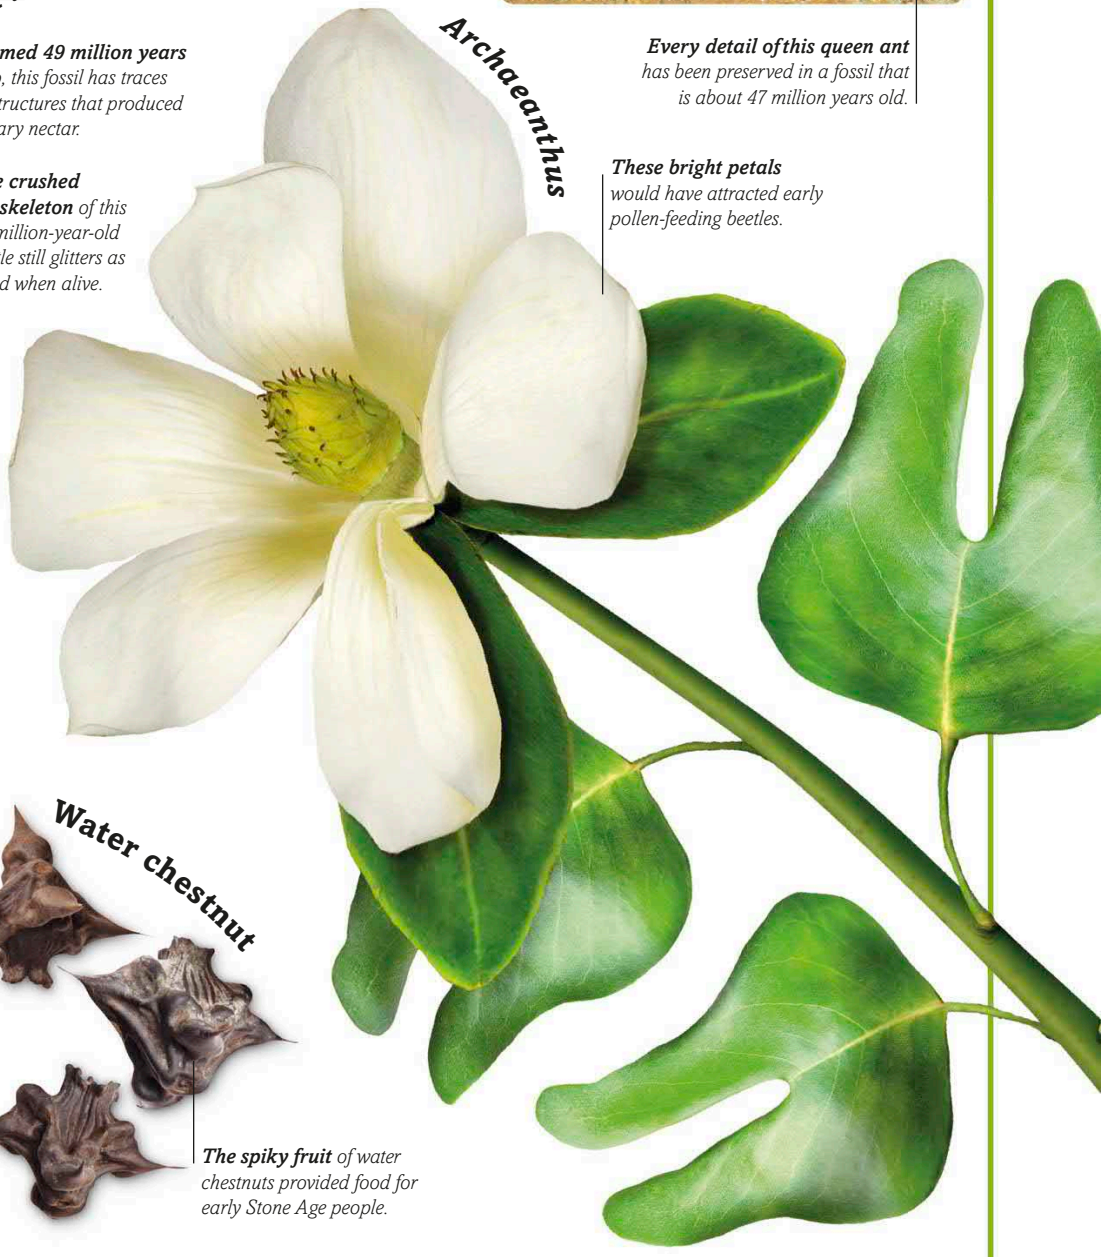

Water chestnut

***The spiky fruit** of water chestnuts provided food for early Stone Age people.*

been transformed. The following Cenozoic Era saw an increase in plants with showy, nectar-bearing, and possibly fragrant flowers like those of ***Florissantia***. They evolved alongside nectar-feeding insects, including **bees** and **butterflies**. These insects transferred pollen from flower to flower much more efficiently than the wind, enabling the plants to set seed more easily. This meant that the Cenozoic—the age of mammals—was probably far more colorful than all previous ages, and buzzing with a greater variety of insect life than ever before.

Trapped in amber

The **oldest** known animals trapped in amber died **230 million** years ago.

Most of our knowledge of prehistoric life comes from fossils—the remains or traces of animals, plants, and other living things that have turned to stone. Usually, only the toughest materials such as bones get fossilized this way, and all the softer tissues are lost.

But one natural process retains every detail of even the smallest animals—preservation in amber. A glasslike, golden-yellow material, amber is the hardened form of sticky resin that oozes from wounds in the bark of trees like pines. Any insect that lands on it may get stuck,

Fly

Tiny details *visible on insects like this fly help scientists to classify and study them.*

Feather

Some feathers *sealed in amber belonged to long-extinct dinosaurs, but were just like those of modern birds.*

Scorpion

This prehistoric scorpion *probably had a stinger in its tail.*

In an attempt to get out of its sticky trap*, this lizard had broken off its tail, just like modern lizards do when trying to escape.*

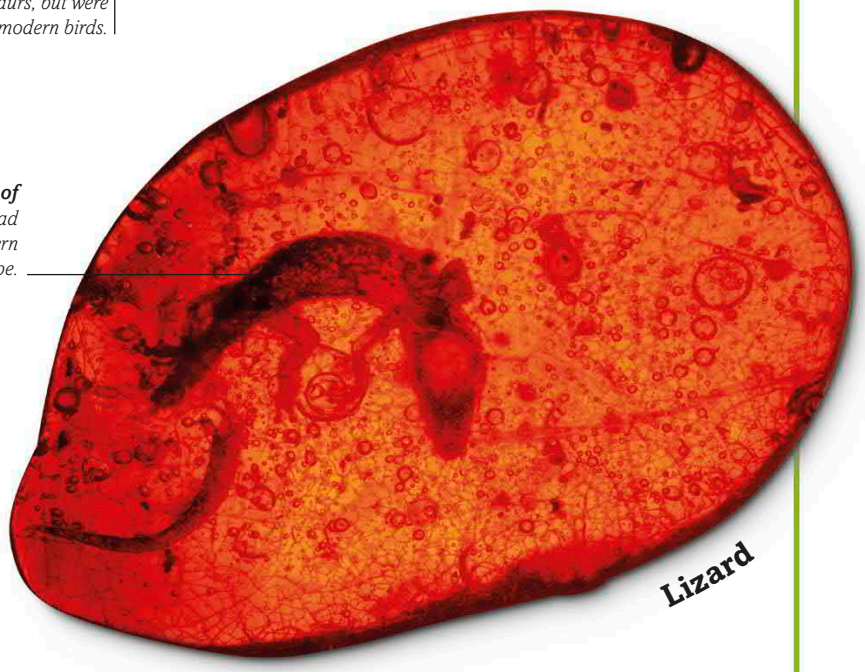

Lizard

Although at least 15 million years old*, this centipede is perfect in every detail.*

Spider

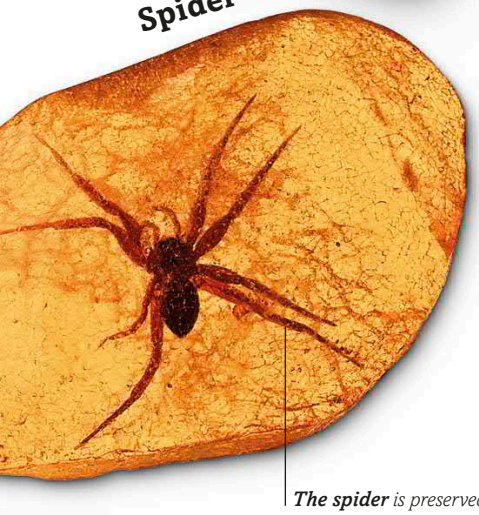

The spider *is preserved in resin that is 40–60 million years old.*

Centipede

trapped, and covered by more resin, which kills it. This resin slowly becomes solid, and over millions of years turns into glassy amber, with the insect sealed inside it. Many kinds of small creatures have been found preserved in amber, including insects, **spiders**, **centipedes**, frogs, and even small **birds**. Some of these animals were trapped so long ago that they would have lived alongside the giant dinosaurs. But most amber is more recent, dating from about 44 million years ago, early in the age of mammals.

The first mammals

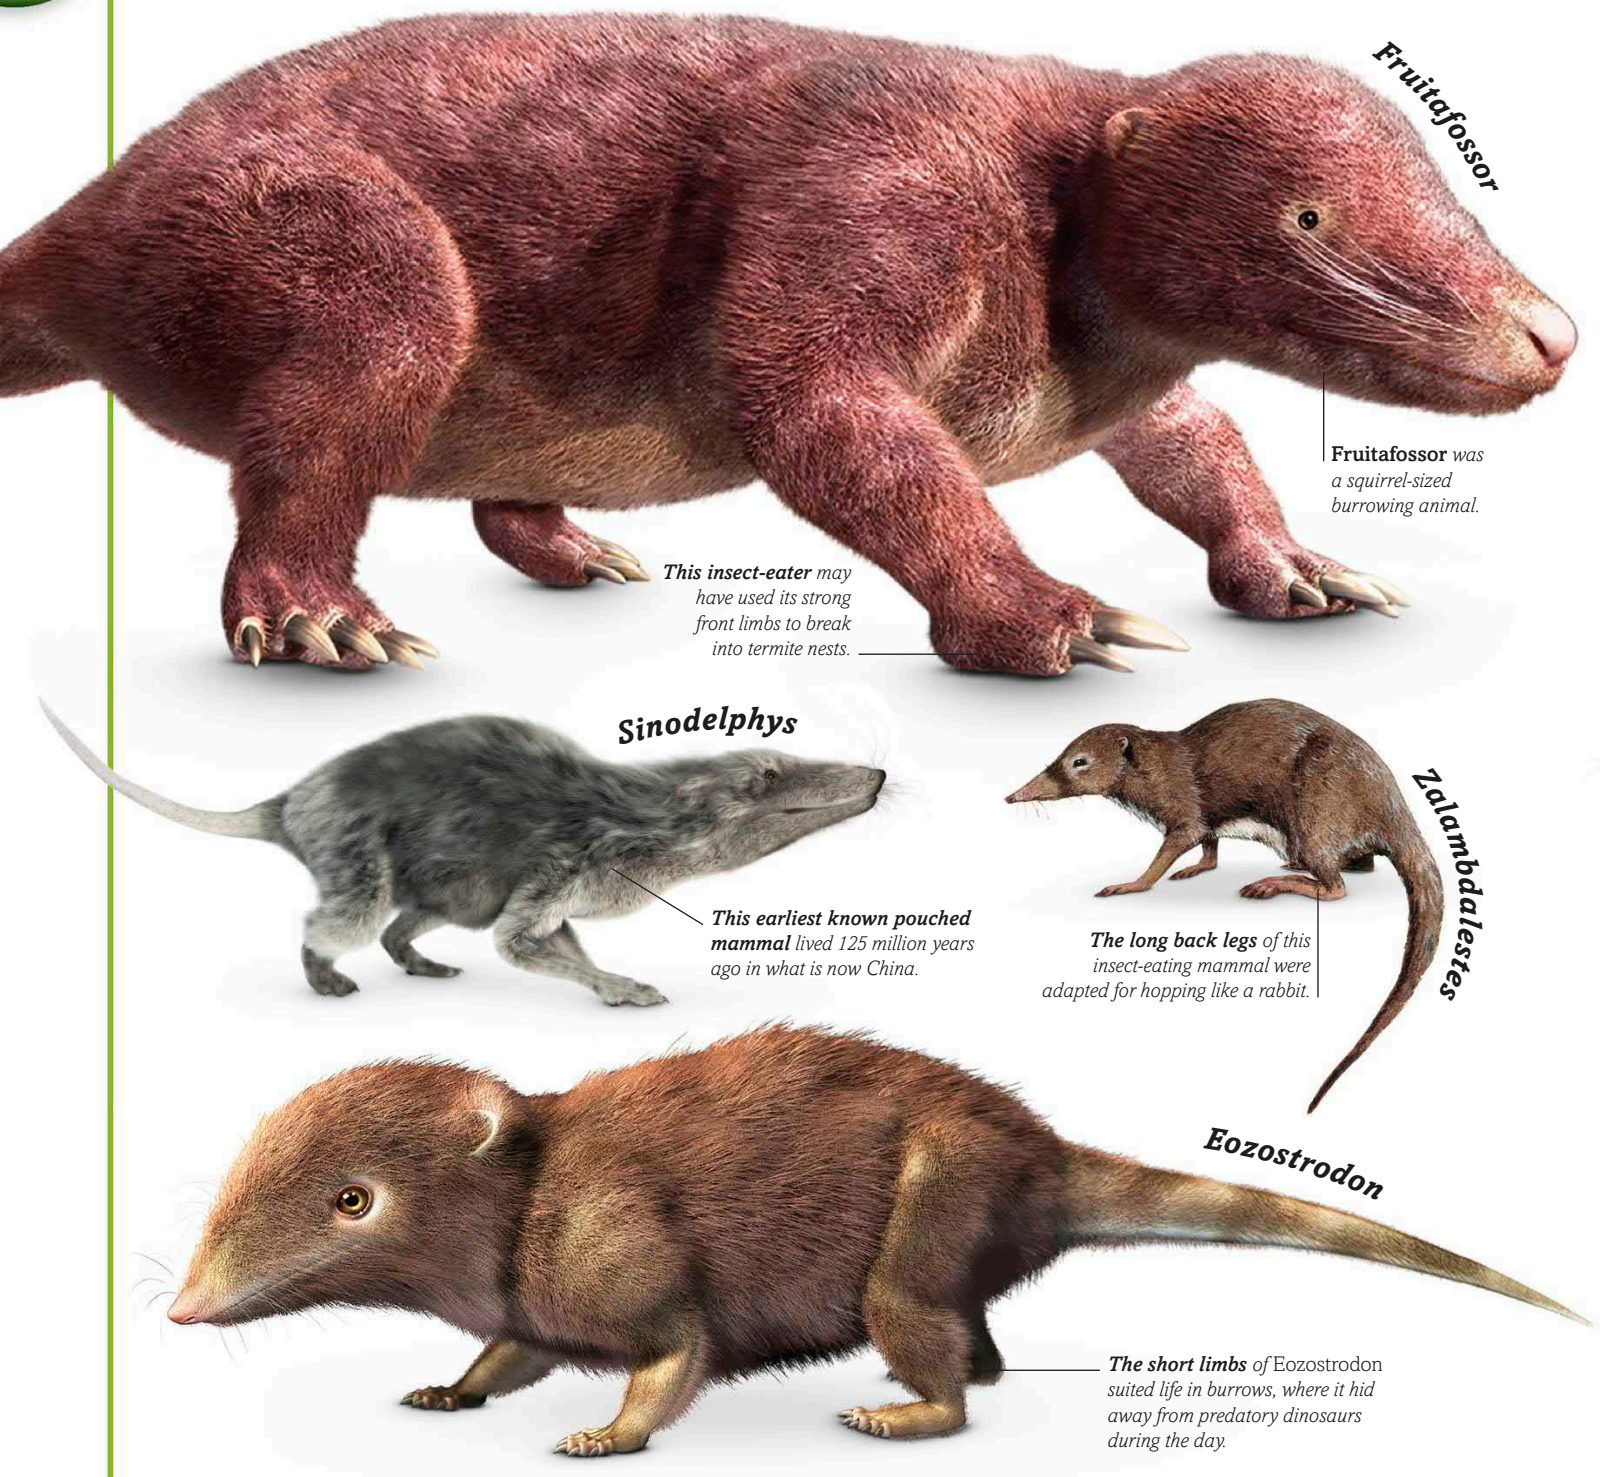

The earliest mammals appeared in the late Triassic Period, about 205 million years ago. Over the next 140 million years mammals lived in the shadow of their dinosaur neighbors. They were small, probably nocturnal creatures that spent most of their time hiding in dense undergrowth, or even underground, preying on insects and small animals. The largest of these secretive creatures, ***Repenomamus***, was no bigger than a badger. The earliest mammals—animals like ***Morganucodon*** and ***Eozostrodon***—would have laid eggs like their

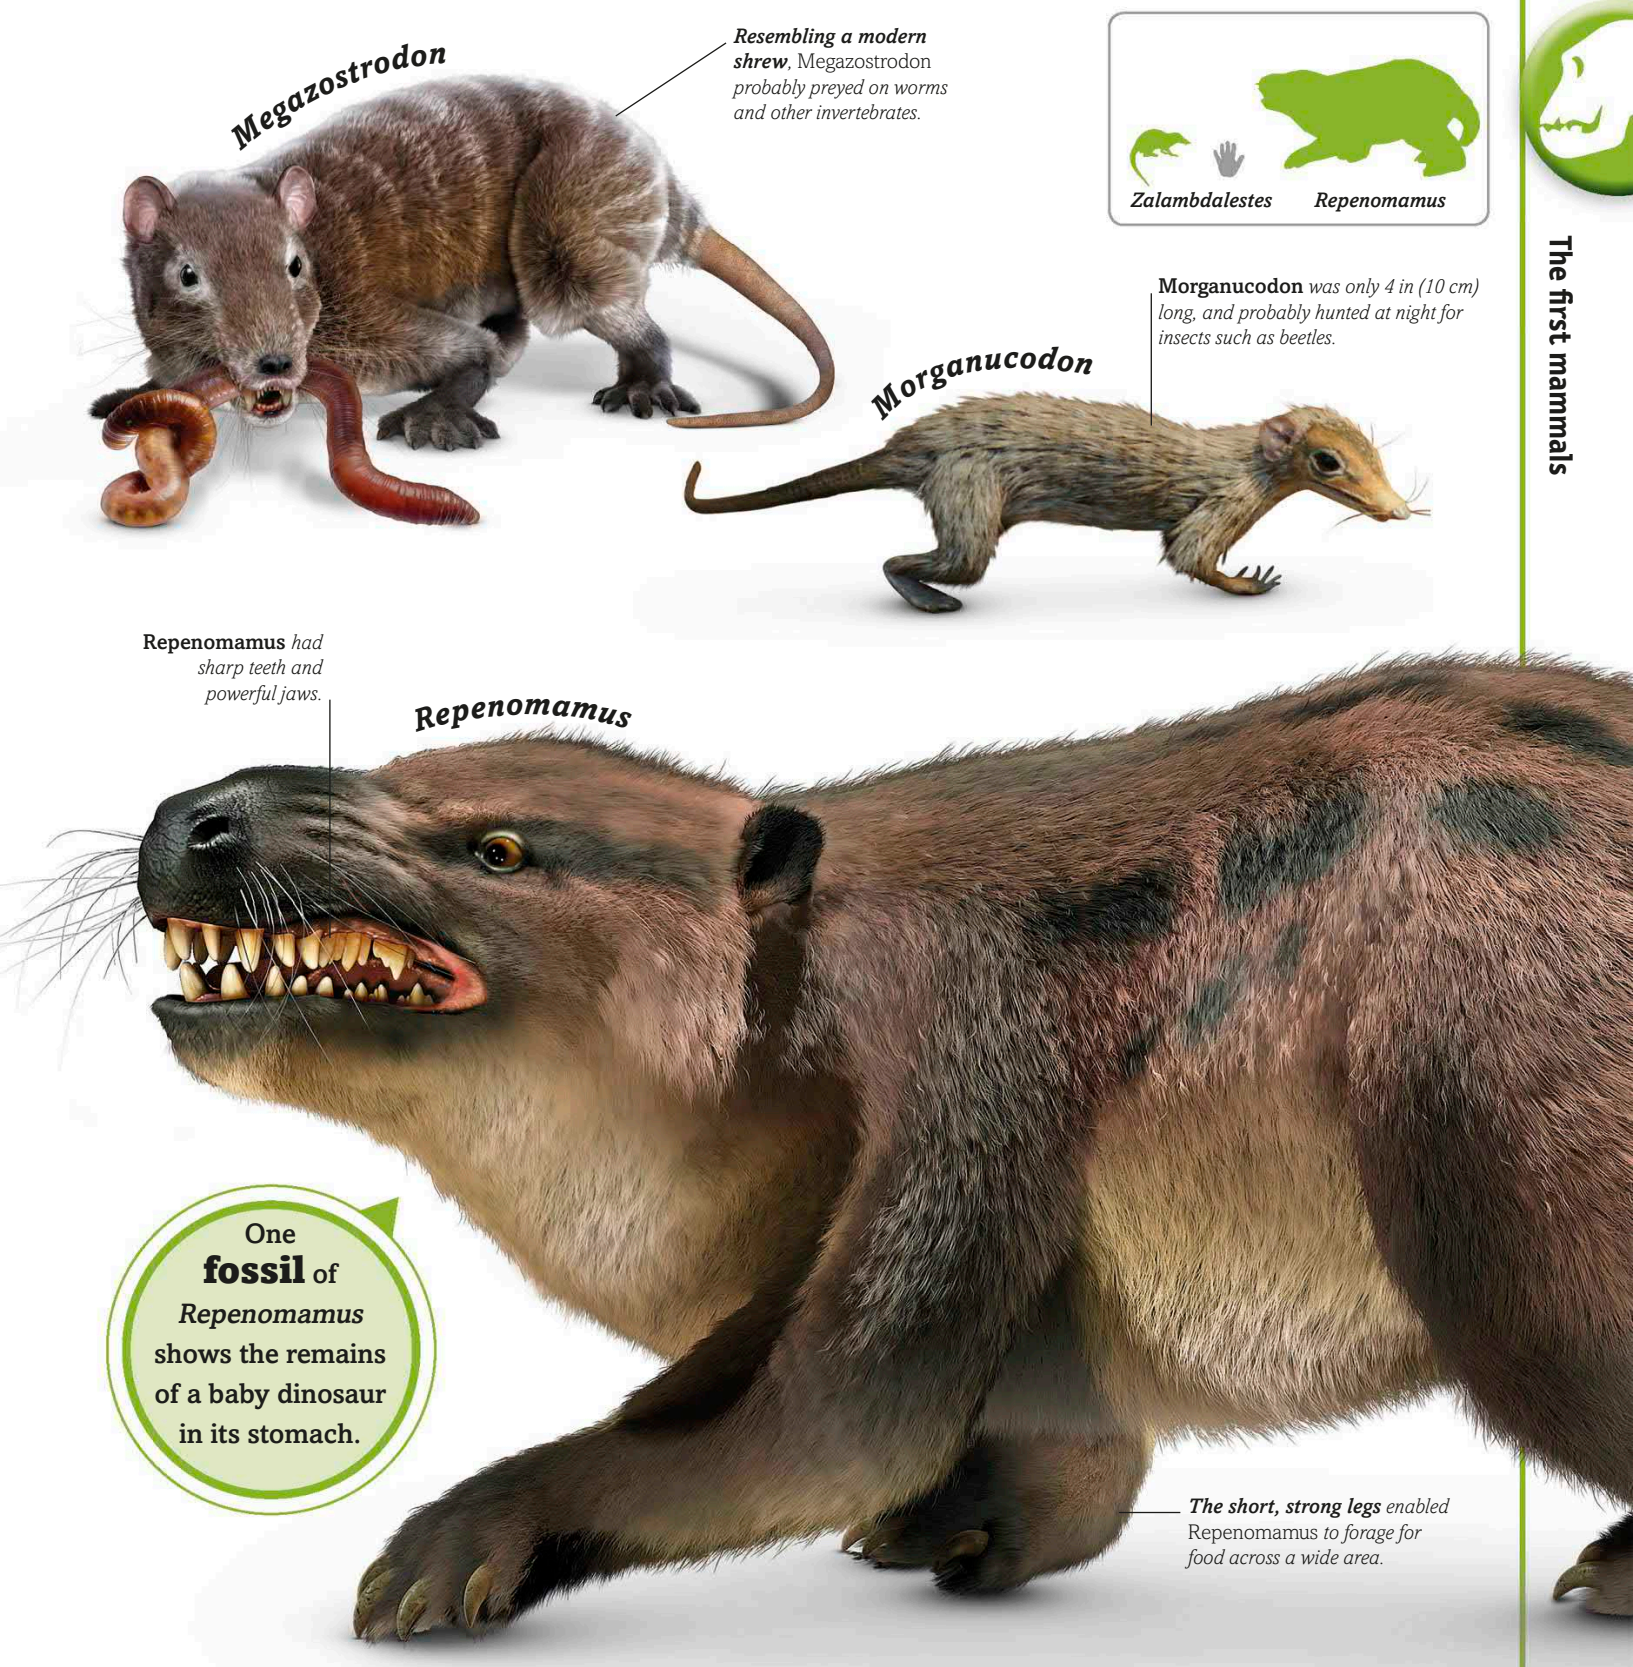

reptile ancestors and like the modern platypus. Living mammals that breed like this are called monotremes. But later in the Mesozoic Era, animals like ***Sinodelphys*** started bearing live young in the same way as modern kangaroos and other pouched mammals (marsupials).

Placental mammals, which bear well-developed babies, appeared a little later, about 90 million years ago. All three types of mammal survived the mass extinction that ended the Mesozoic Era, and the survivors became the ancestors of all modern mammals.

Giant sloths and armadillos

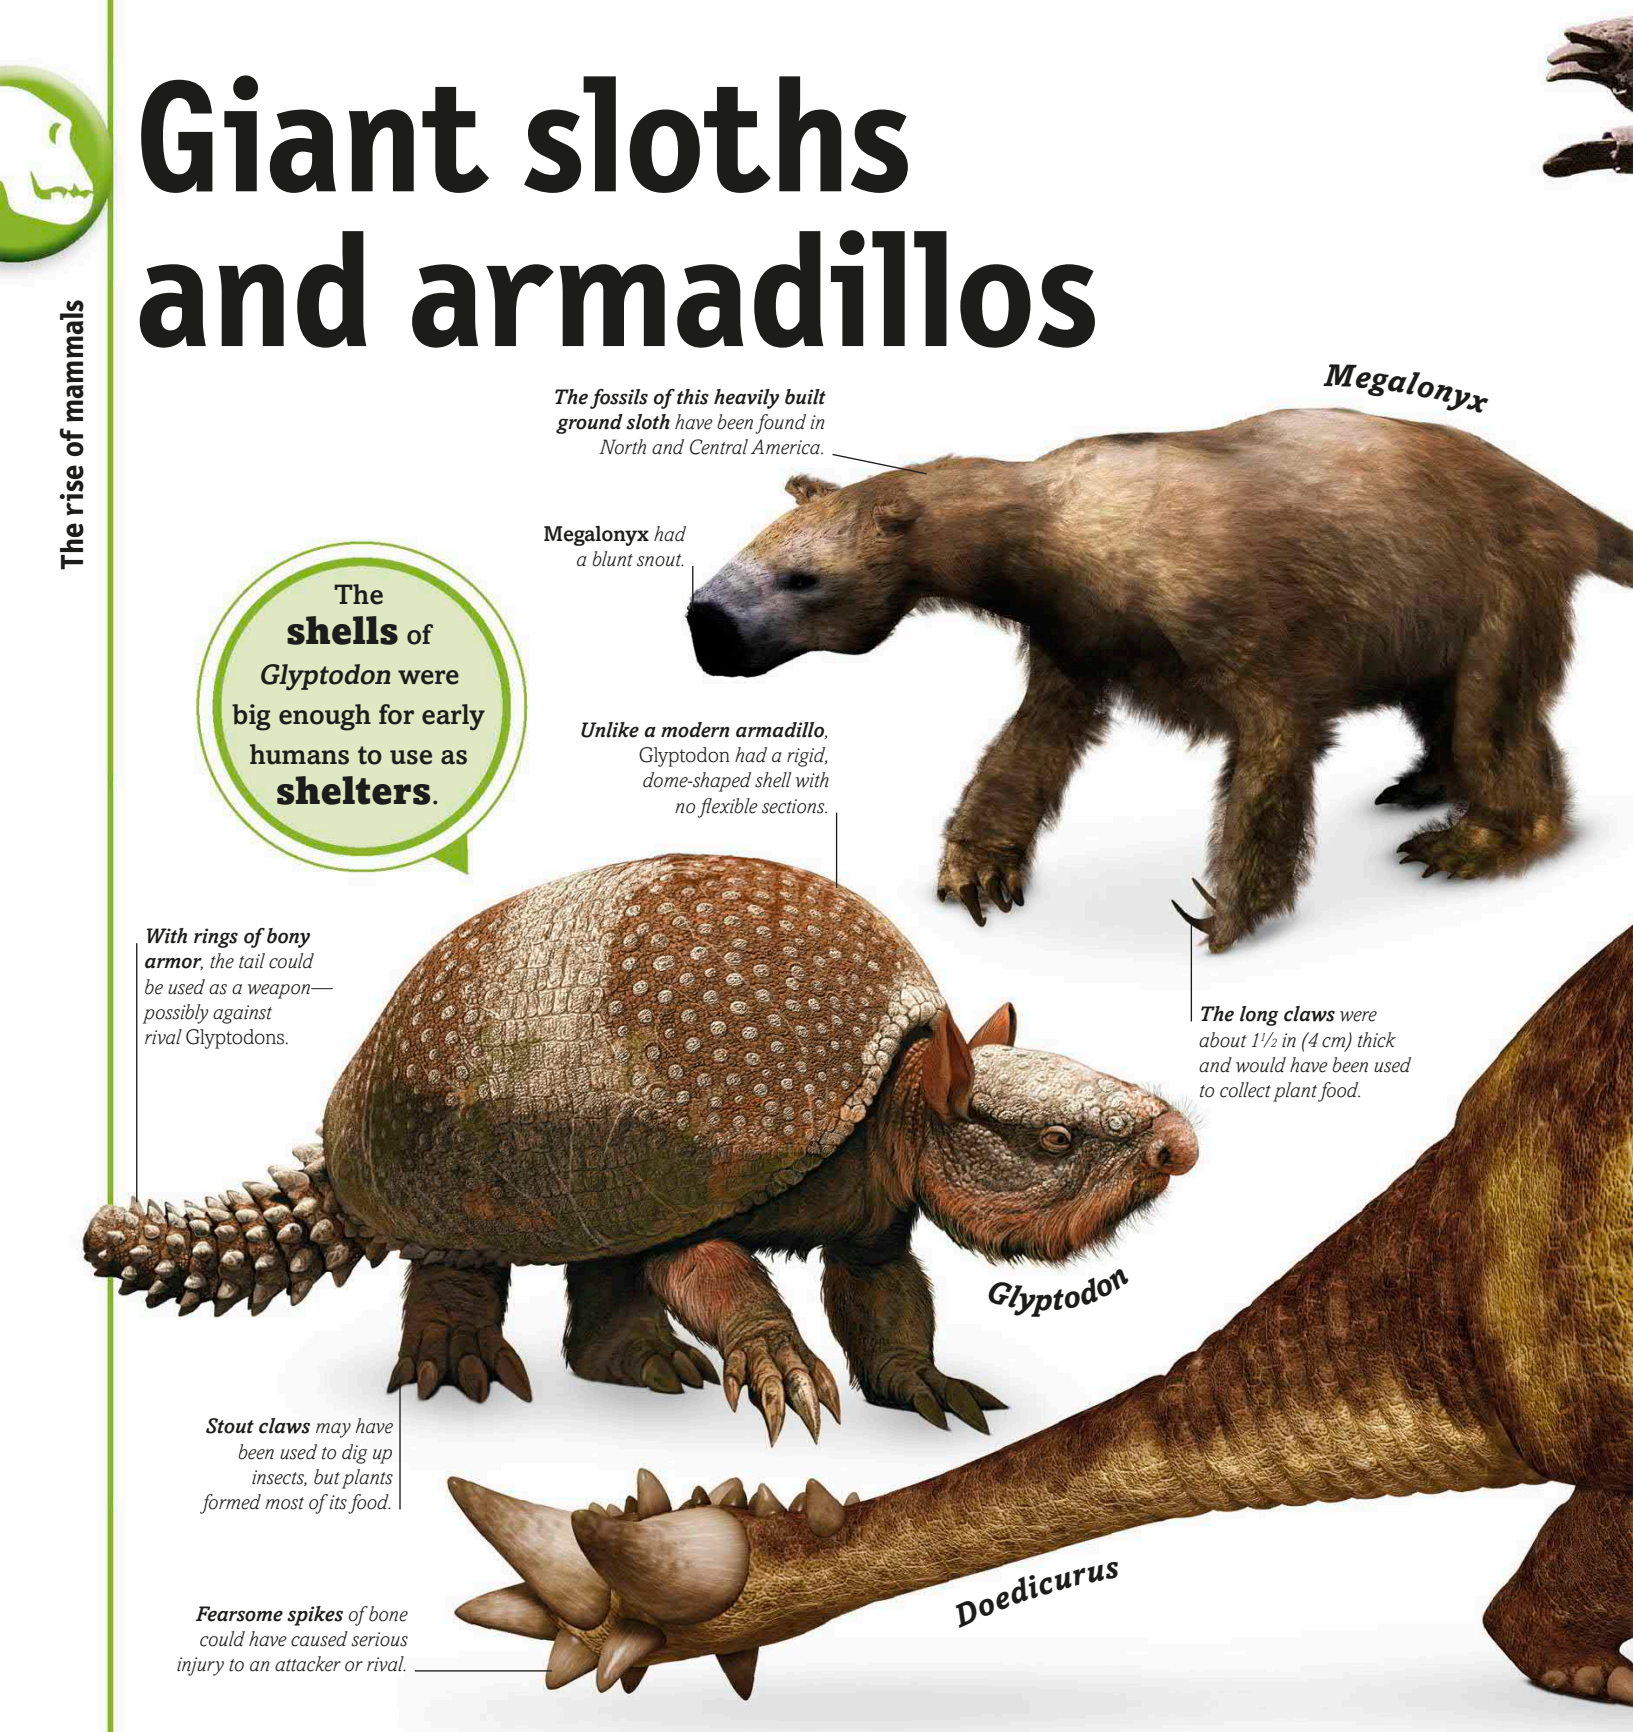

While the giant dinosaurs were still alive, mammals were a small part of the wildlife. But the mammals that survived into the new era inherited a world with very few big animals, and over time their descendants started taking over the role themselves. Some of the most primitive mammals to achieve great size were the xenarthrans—the anteaters, the sloths, and the armadillos and their relatives. Like their modern counterparts, they lived in South America, although some spread to North America when the two continents eventually became

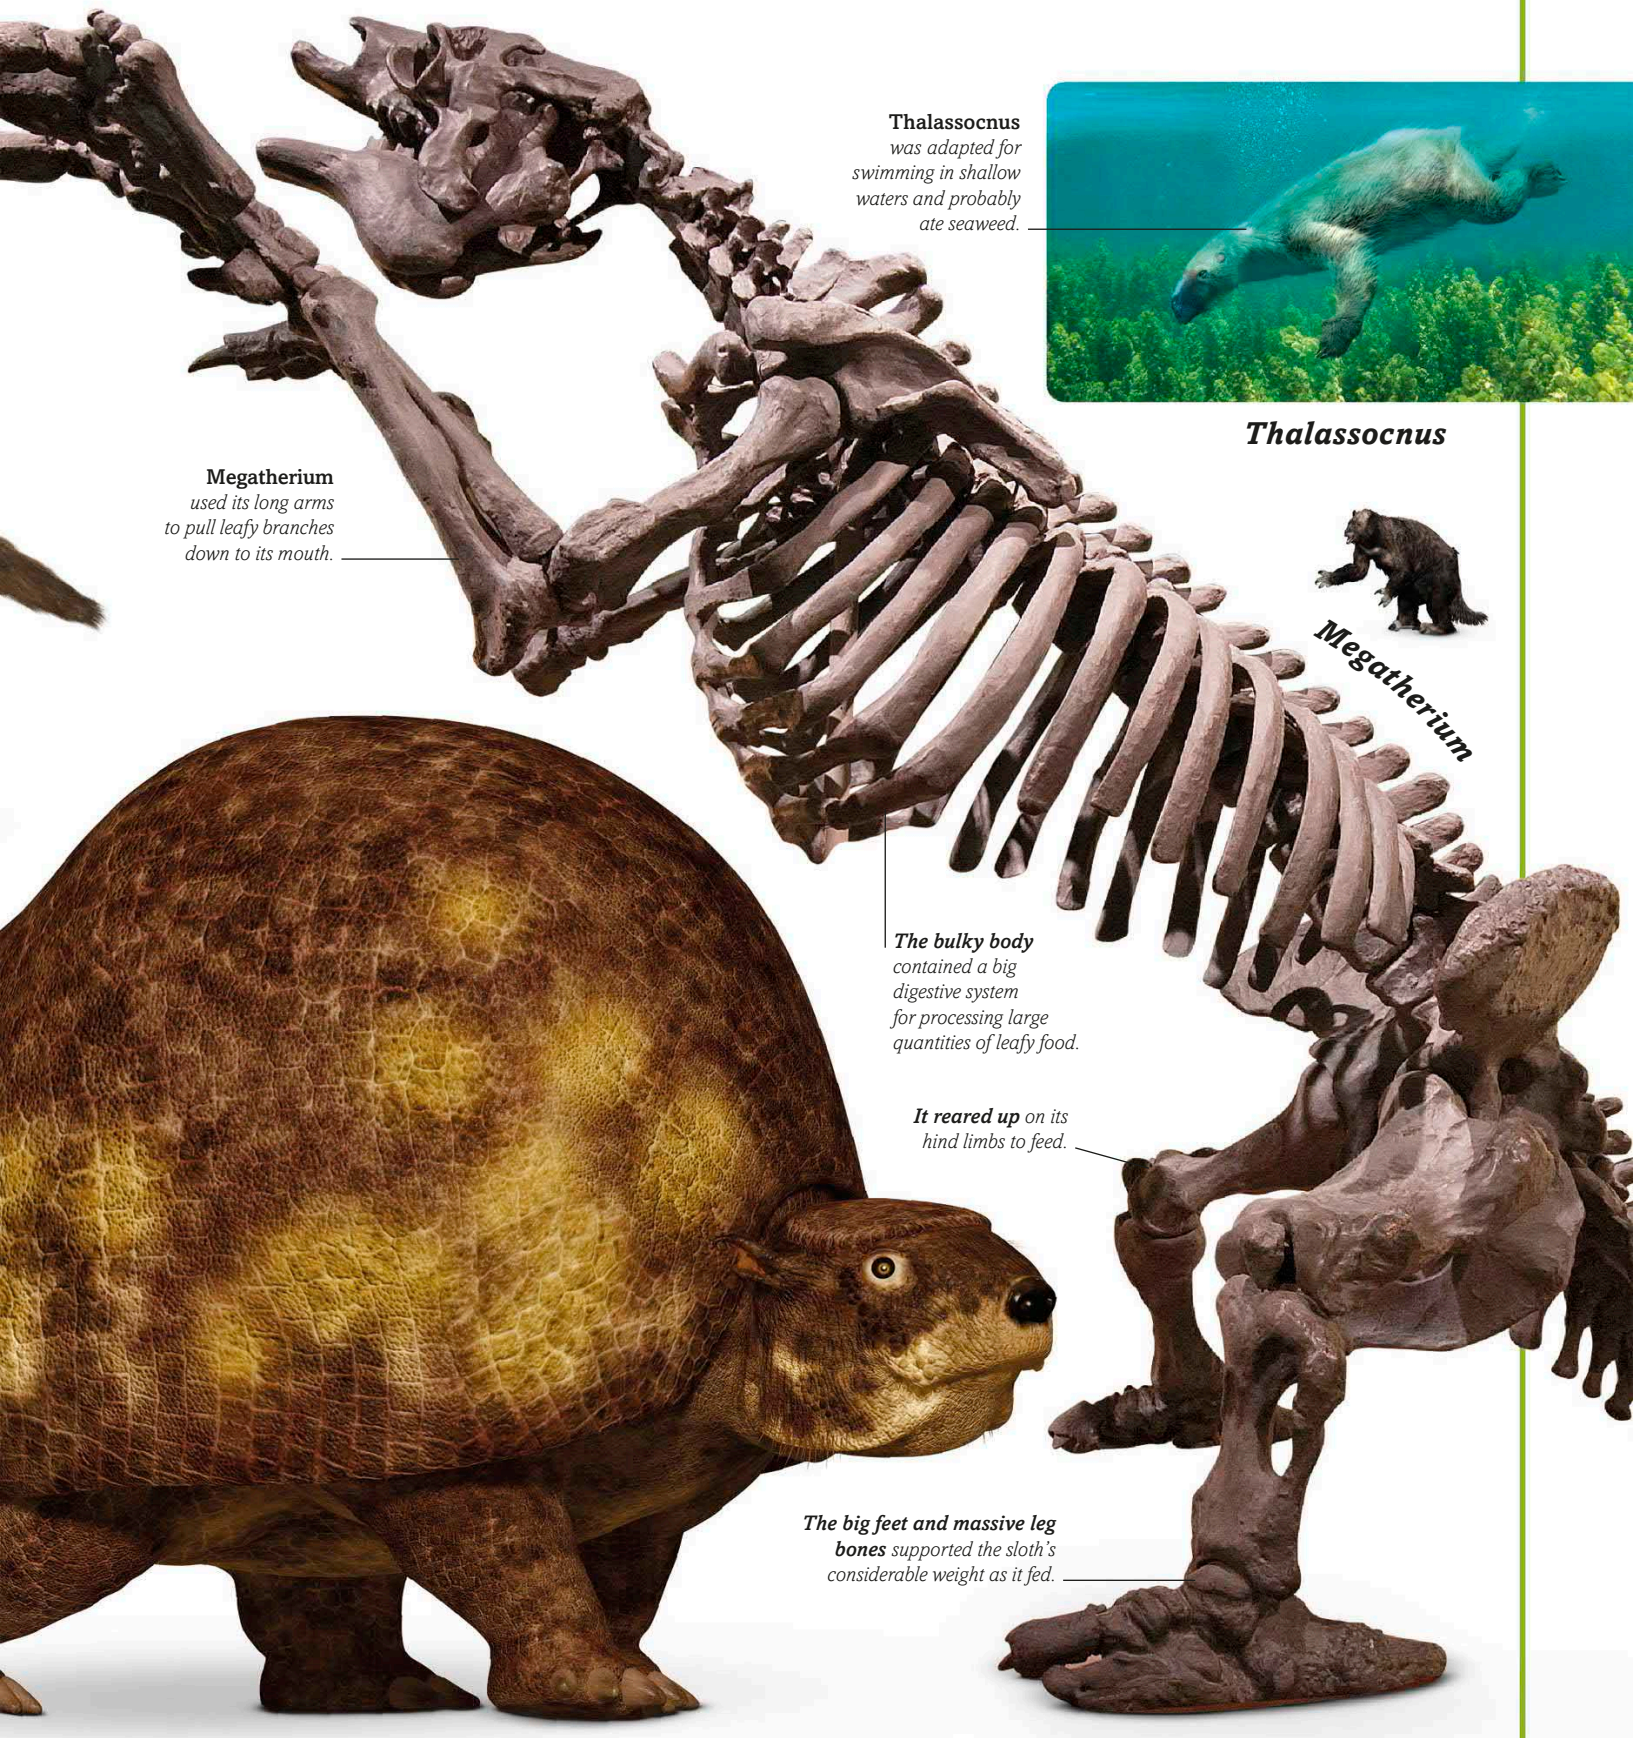

connected. Over the course of 66 million years until the end of the last ice age, they gave rise to some spectacular animals. These included the enormous, armadillolike plant-eater ***Glyptodon*** and the heavily armed ***Doedicurus***, which were both protected from predators by bony armor.

Biggest of all was the giant ground sloth ***Megatherium***, a specialized leaf-eater that grew to the size of an Indian elephant. Able to rear up on its hind legs to reach high into the trees, it gathered food with its long front claws and mobile lips.

Body cover

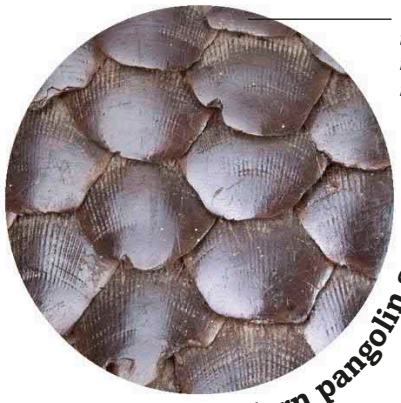

The scales *of pangolins and their extinct ancestors are made of keratin—the same material that forms hair.*

Modern pangolin scales

The stiff, sharp spines *of this insect-eating mammal helped protect it from predators.*

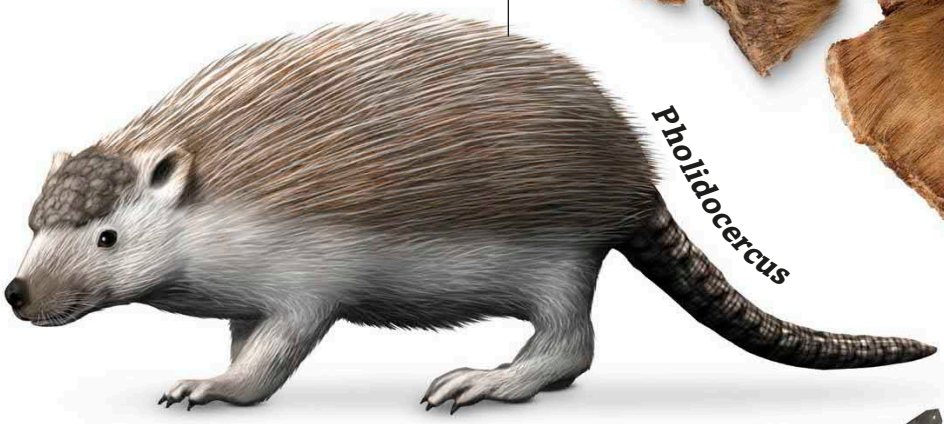

Pholidocercus

Doedicurus spiked tail

An armored relative *of modern armadillos,* Doedicurus *was also equipped with a defensive tail club.*

Macrocranion *fossils* *found in the 47-million-year-old rocks of the Messel Pit in Germany show evidence of fur.*

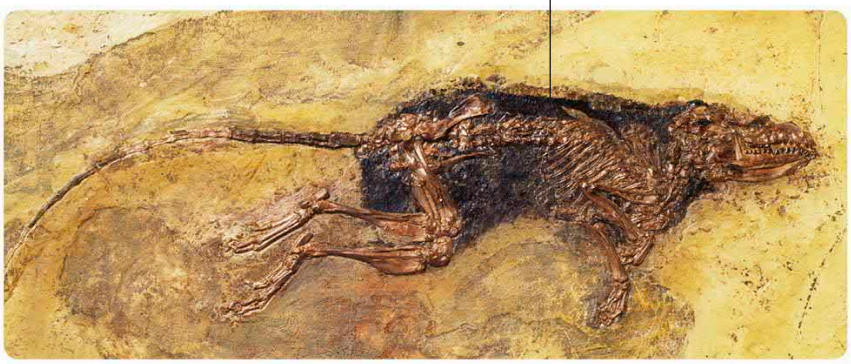

***Macrocranion* fossil**

Echidna spines

Each spine *is a modified hair, with a spongy core and a very sharp tip.*

A lot of the energy that a mammal gets from its food is turned into heat that keeps its body warm. The less heat it loses through its skin, the less it has to eat, so most mammals are covered with hair or fur that acts as insulation. Other animals like bumblebees have furry bodies, but the fibers have a different structure. Only mammals have true hair, and it evolved early in their ancestry, probably more than 250 million years ago. Some of the earliest physical evidence is seen in 125-million-year-old fossils of ***Eomaia***, which show traces of fur

Mylodon hide

Palaeochiropteryx

The fur of this ground sloth is so well preserved that it was once thought the animal might not be extinct.

Armor fossil fragments

Bats *such as the 47-million-year-old* Palaeochiropteryx *flew on wings of naked, stretched skin.*

The tough armor *of* Glyptodon *was made up of hundreds of bony plates called osteoderms.*

Glyptodon

The fossils of **Eomaia** *are some of the earliest to be found with traces of fur.*

Eomaia

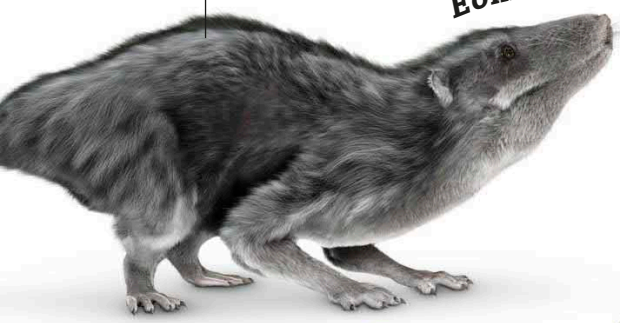

Glyptodon **was about the size and shape of a Volkswagen Beetle.**

Glyptodon *had powerful claws for climbing and digging.*

around the bones. Actual fur has been found on fragments of ***Mylodon*** hide preserved for more than 12,000 years in cold, dry South American caves. Hair can be modified to form prickly spines for defense, as in echidnas and the hedgehoglike ***Pholidocercus***, which lived 47 million years ago. Other fossils preserve the armor of armadillolike animals such as ***Glyptodon*** and ***Doedicurus***, and the fossils of some extinct mammals show traces of tough, overlapping scales like those of a modern pangolin.

Mega-marsupials

Many early mammals were marsupials—mammals whose half-formed young live in the mother's pouch until fully developed. Marsupials were thriving in South America and Australia, which had once been part of the same continent, about 100 million years ago. Some, like the fearsome saber-toothed ***Thylacosmilus*** and the hyenalike ***Borhyaena***, continued to live in South America alongside placental mammals (mammals that give birth to well-developed young). But there were no placental mammals in Australia, so marsupials

LARGEST MARSUPIAL

The giant wombat *Diprotodon* was the largest marsupial that ever lived. Up to 10 ft (3 m) long, it stood almost 7 ft (2.1 m) tall. It had enormous front teeth that it used to rip the leaves off bushes and trees, and big cheek teeth for mashing the leaves to a pulp.



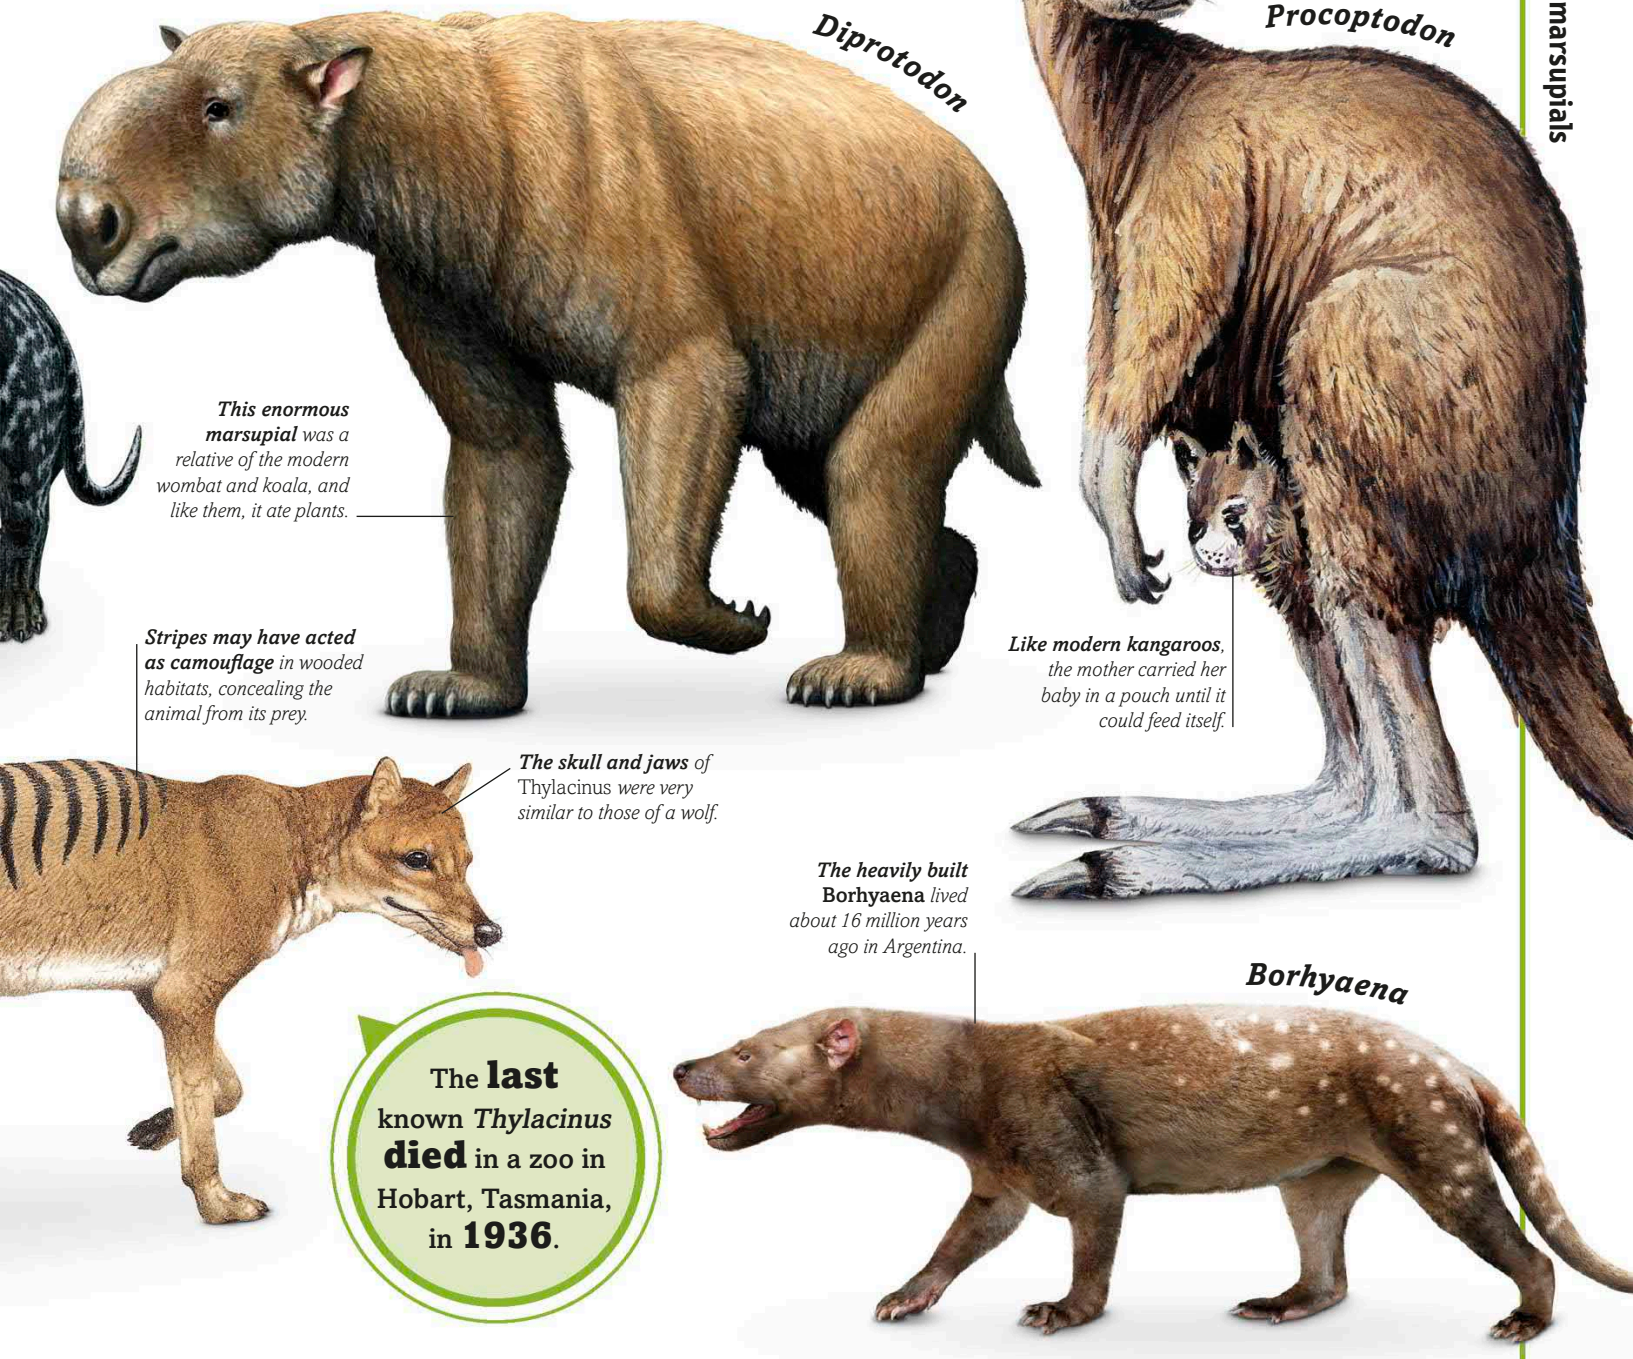

The **last** known *Thylacinus* **died** in a zoo in Hobart, Tasmania, in **1936**.

evolved to take their place. They included ancestral koalas; the plant-eating, tapirlike ***Palorchestes***; and the predatory marsupial lion ***Thylacoleo***. During the ice ages, some of these animals grew to huge sizes, like the giant kangaroo ***Procoptodon*** and the hippopotamus-sized wombat ***Diprotodon***. Most of these ice-age marsupials had become extinct by about 30,000 years ago, probably because climate change had created a drier climate, but ***Thylacinus***, also known as the Tasmanian wolf, survived into the early 20th century.

Giant herbivores

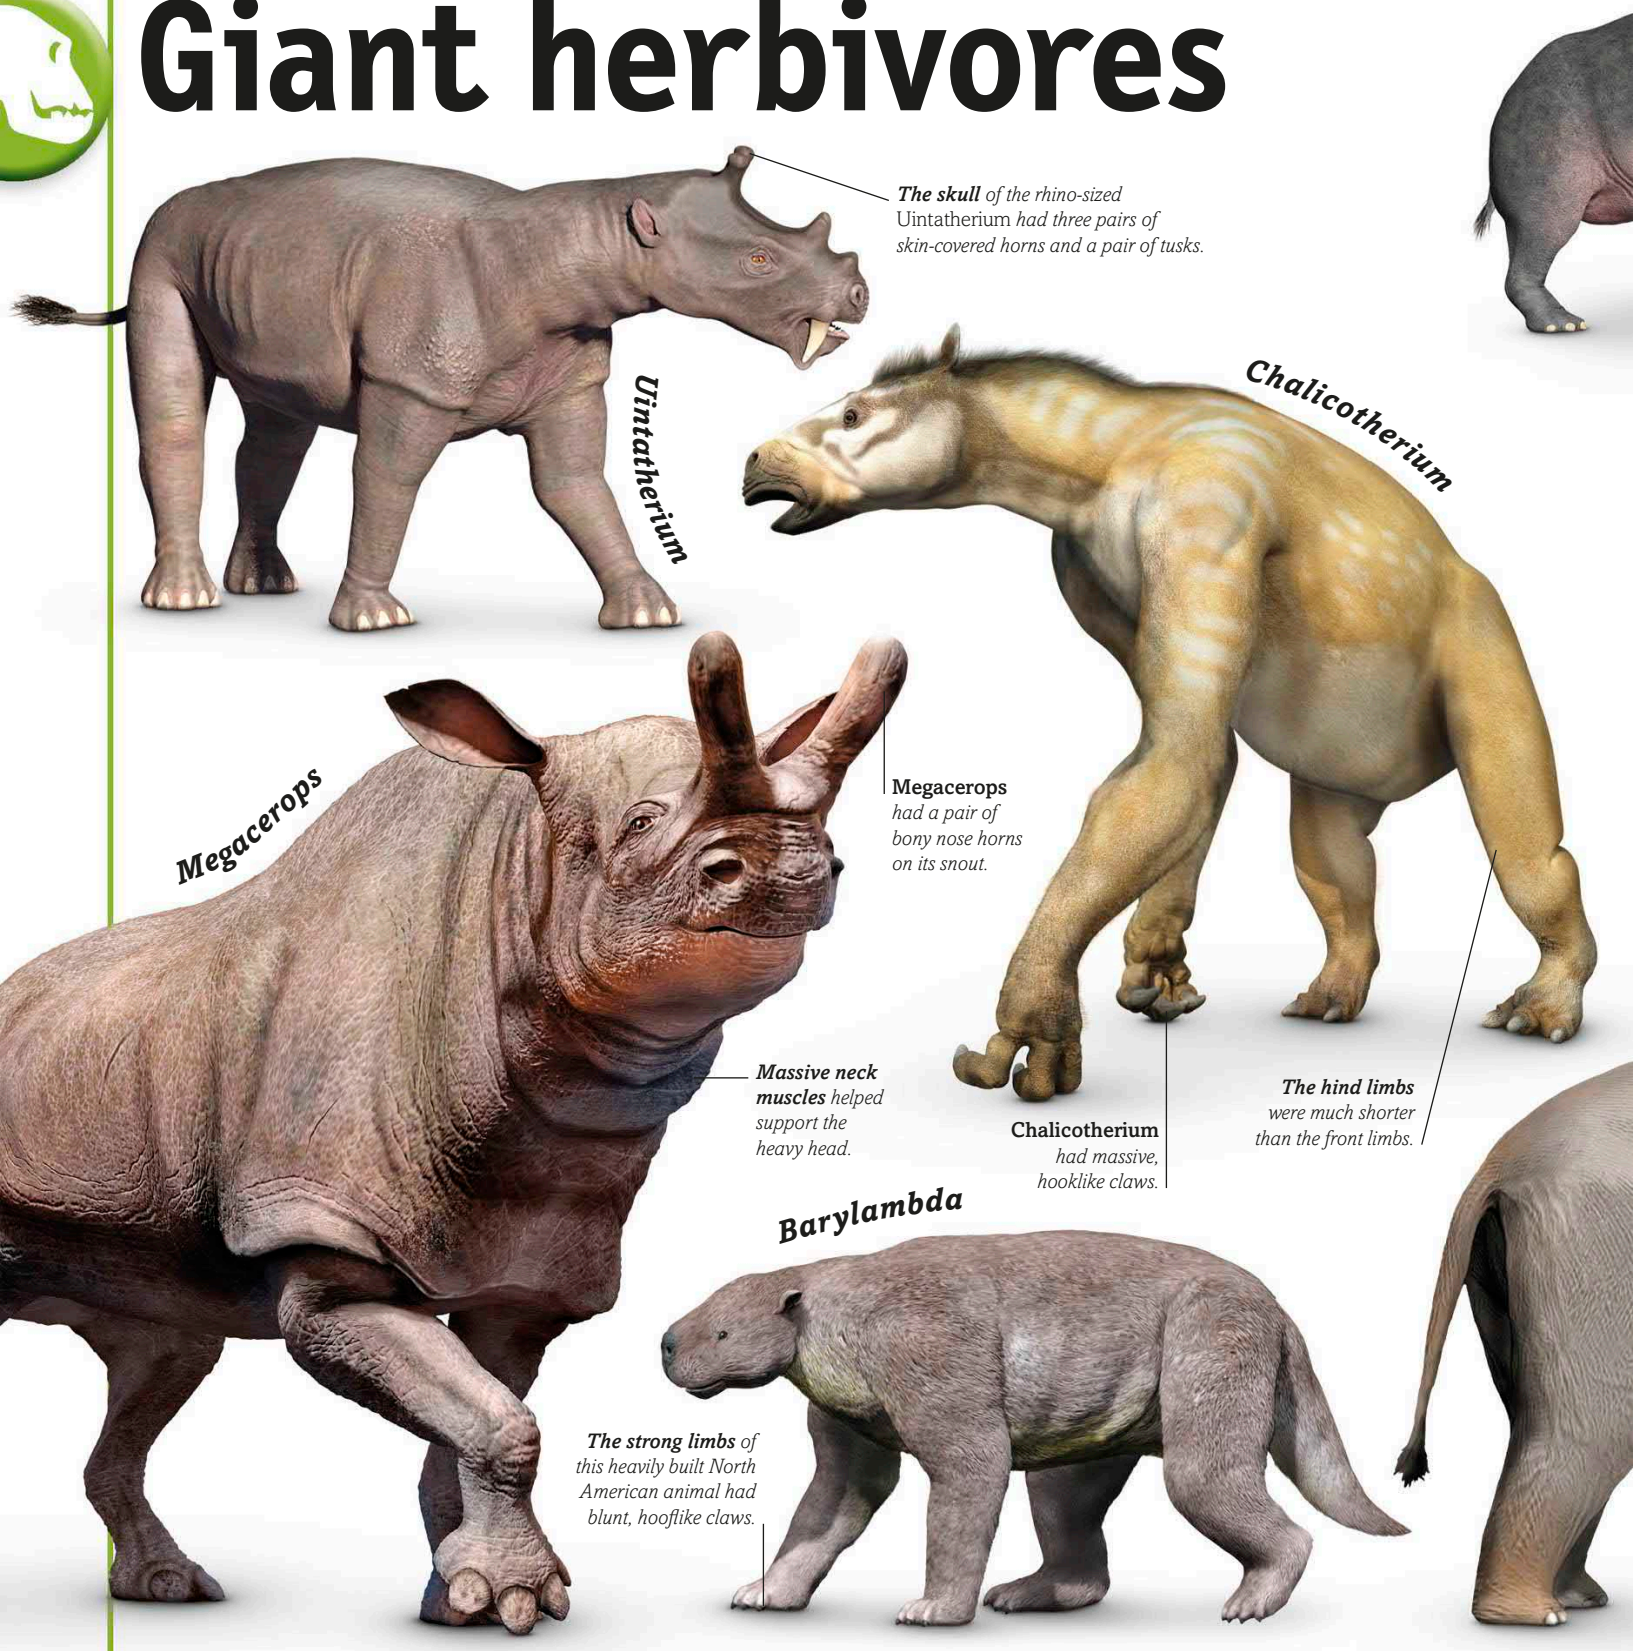

After the disappearance of the giant dinosaurs about 66 million years ago, most mammals were still pretty small. But over time, new types evolved and replaced the huge plant-eaters that had vanished from the Earth. Fossils dating from after 60 million years ago show that the world's forests and plains were becoming populated by a range of spectacular herbivores. These eventually included the early elephant ***Gomphotherium*** and the odd-looking ***Chalicotherium***, with its long claws that forced it to walk on its knuckles. Some of the biggest of

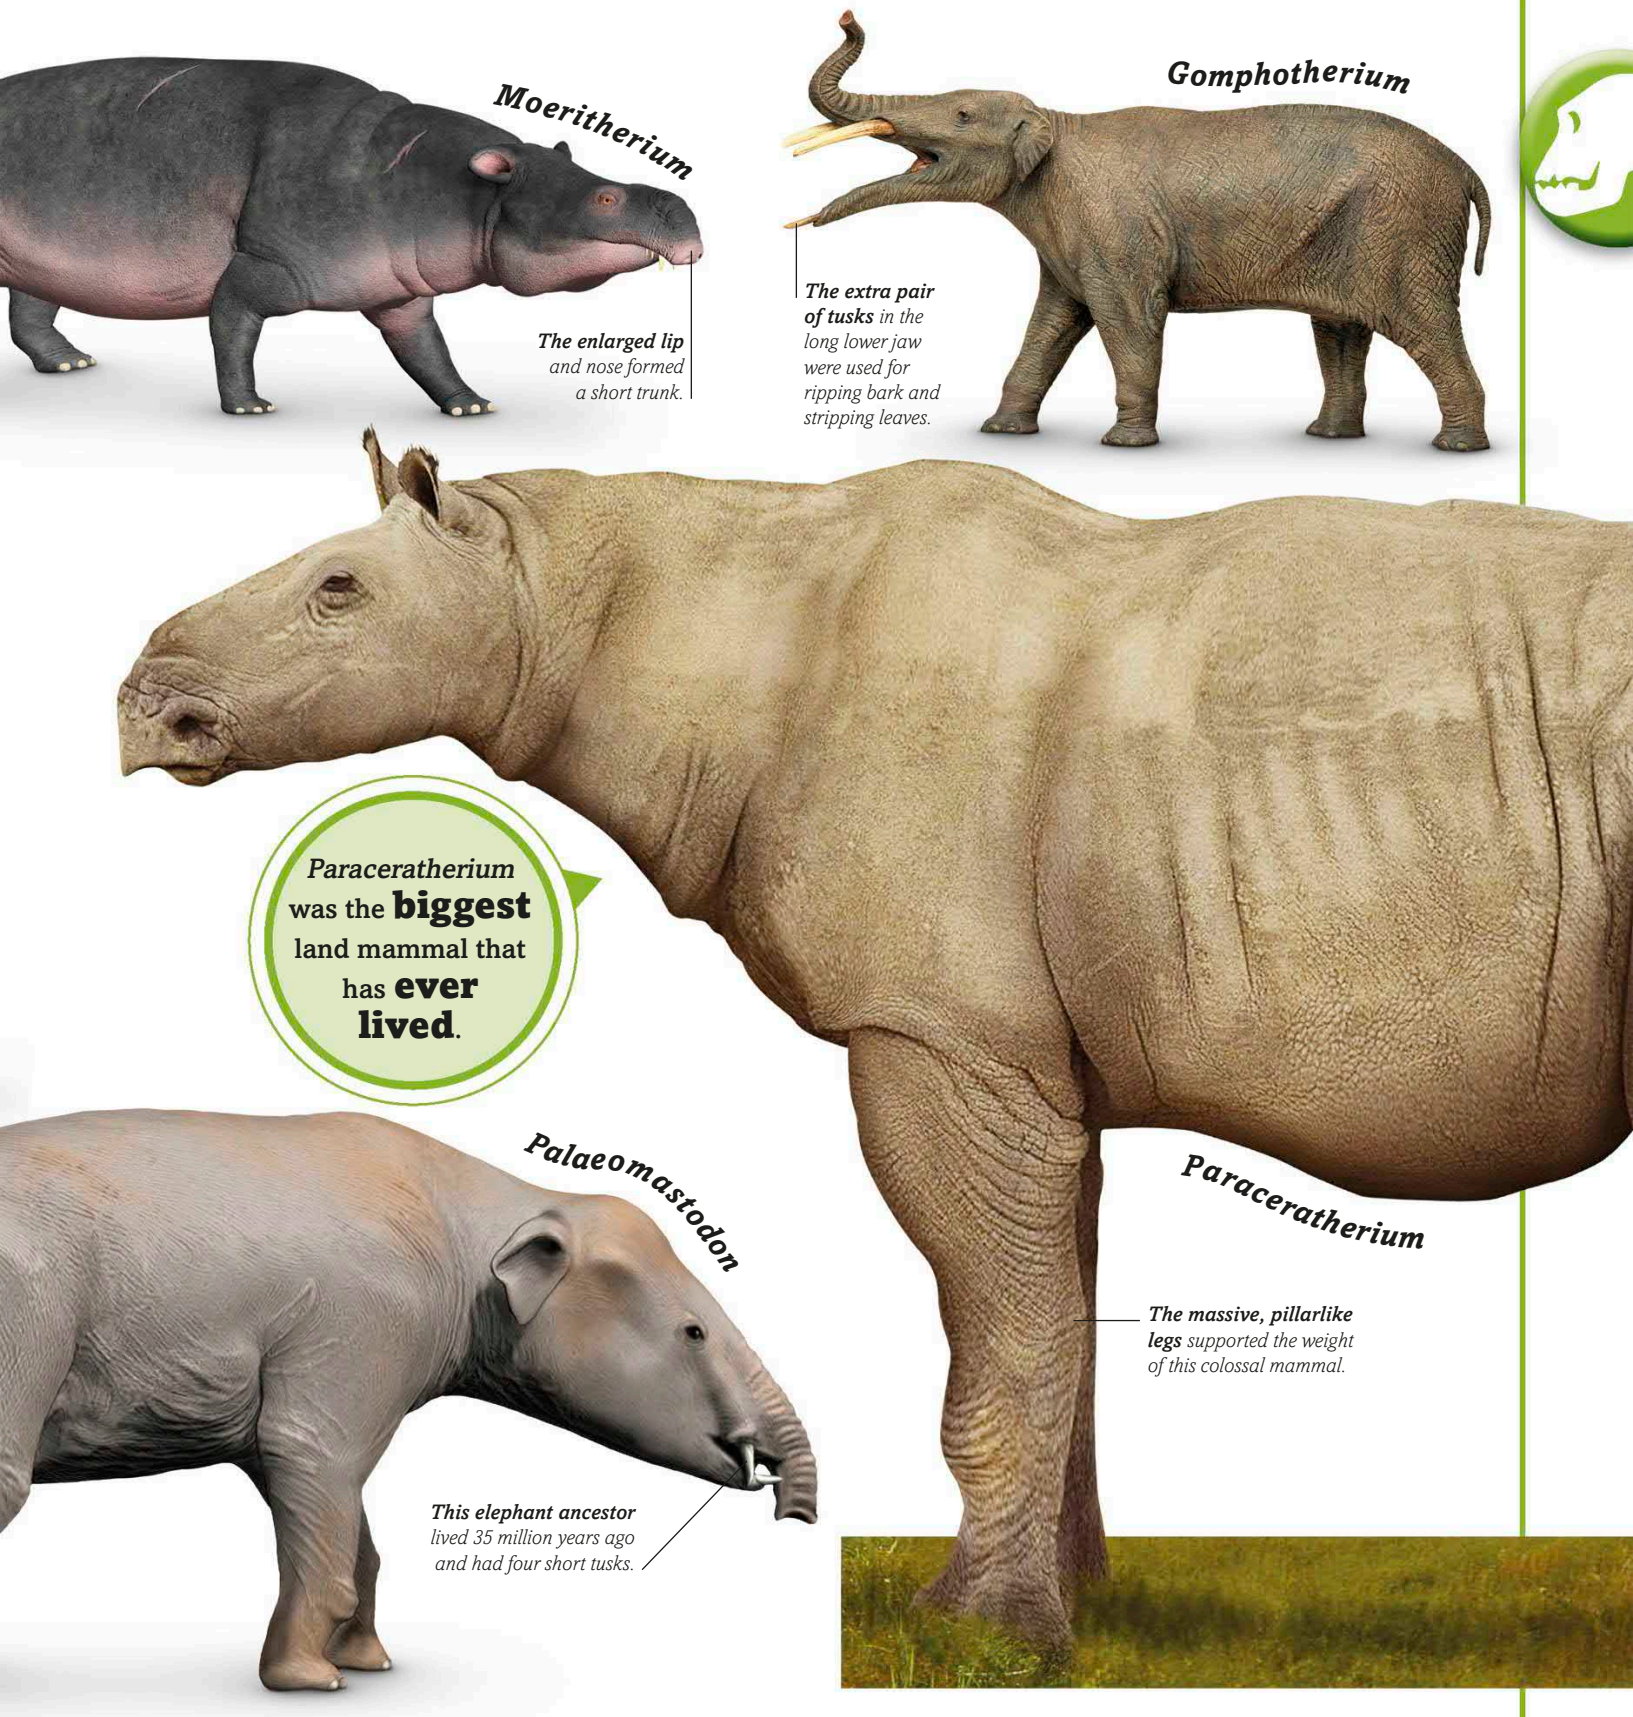

these animals are known as megaherbivores—***Paraceratherium*** was 18 ft (5.5 m) tall and could reach high into the treetops like a giraffe. Despite their immense size, the megaherbivores were preyed upon by heavily armed hunters like the saber-toothed cats. Most of these plant-eating giants have now vanished—they flourished right up until the end of the most recent ice age about 11,500 years ago—but a few megaherbivores, like the elephants, rhinos, hippopotamuses, and giraffes, still survive in some parts of the world.

Horns and antlers

The bony knobs on the nose *of* Megacerops *were bigger in males and were probably used for fighting rivals.*

Megacerops

Arsinoitherium

These massive paired horns *were extensions of the bony skull.*

The antlers of males *broke off at this point every year after the fall mating season and regrew in spring.*

Megaloceros

SUPERSIZED ANTLERS

At up to 10 ft (3 m) long, and with huge antlers, a bull moose is the largest living deer. *Megaloceros* was about the same size, but its antlers were twice the span and weighed up to 88 lb (40 kg). These antlers would have grown from nothing to full size in about 5 months, making them the fastest-growing animal organ.

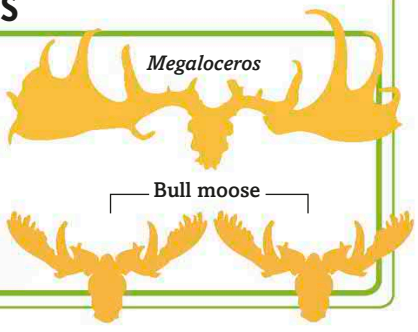

Many of the big plant-eating mammals that replaced the giant dinosaurs had spectacular horns and other structures on their heads. Some, like the long, sharp horns of ***Pelorovis***, may have helped the animals defend themselves against hungry predators. But others were definitely for fighting with their own kind or simply showing off. Among many modern mammals, possessing the biggest set of horns is a mark of high status, ensuring breeding success. There is no reason why extinct mammals would be any different. Since

the animals with the most impressive headgear were more likely to breed, the horns got bigger over time, resulting in huge structures like the paired bony horns of ***Arsinoitherium*** and the massive single horn of ***Elasmotherium***. But the biggest horns of all belonged to the giant deer ***Megaloceros***. They were antlers—horns that are shed and regrown each year. These antlers could span 12 ft (3.6 m). Only males had them, and they were used to impress and, if necessary, fight rival males trespassing on their breeding territory.

Powerful predators

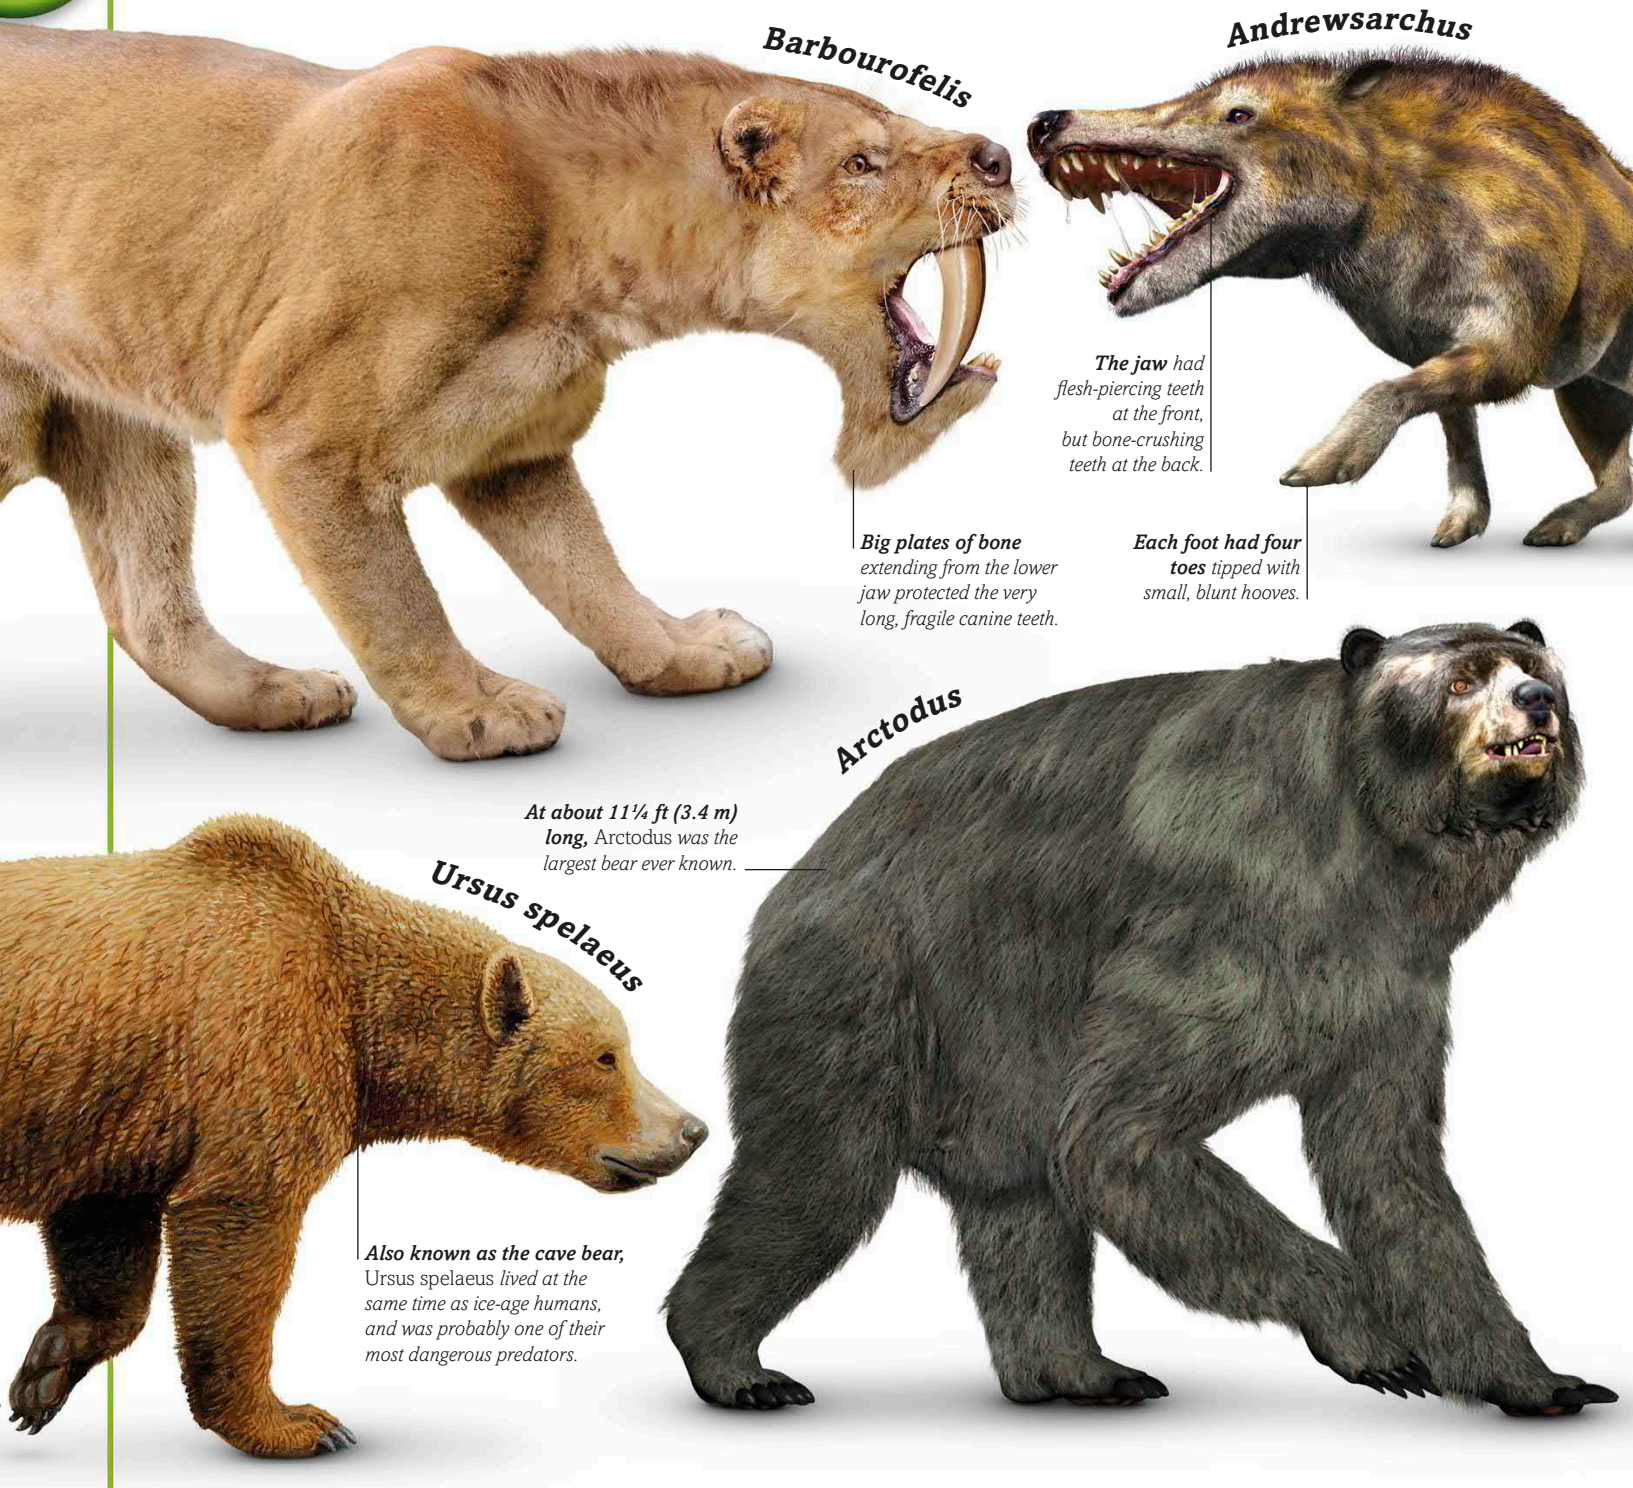

The giant herbivores that took the place of extinct plant-eating dinosaurs were preyed upon by a variety of big, heavily armed hunters. The earliest of these were doglike animals called creodonts like ***Hyaenodon***, which was probably the fastest predator of its time. But by about 11 million years ago, these animals had been displaced by the true carnivores—the group that now includes cats, dogs, bears, and hyenas. The most fearsome of these hunters—***Barbourofelis*** and the saber-toothed cat ***Smilodon***—had long,

The giant dog *Epicyon* **weighed** as much as a modern **grizzly bear**.

Epicyon

A powerful, heavily built predator, *Epicyon was about 5 ft (1.5 m) long.*

Armed with bone-crushing jaws *that were studded with sharp teeth,* Hyaenodon *could easily pierce flesh.*

Hyaenodon

Smilodon

Smilodon *would have used its long, saw-edged saber teeth like daggers to stab and kill its prey.*

The front legs *were unusually powerful, and would have been used for grappling big animals to the ground.*

knifelike canine teeth for stabbing their big prey. Other carnivores, such as the massively built short-faced bear ***Arctodus*** and the bone-crushing dog ***Epicyon***, probably relied on brute strength to overcome their prey. But creodonts and carnivores were not the only hunters.

One of the biggest land predators that ever existed was the wolflike ***Andrewsarchus***, which lived about 40 million years ago—a hoofed animal whose closest living relatives are wild pigs.

Mammal teeth

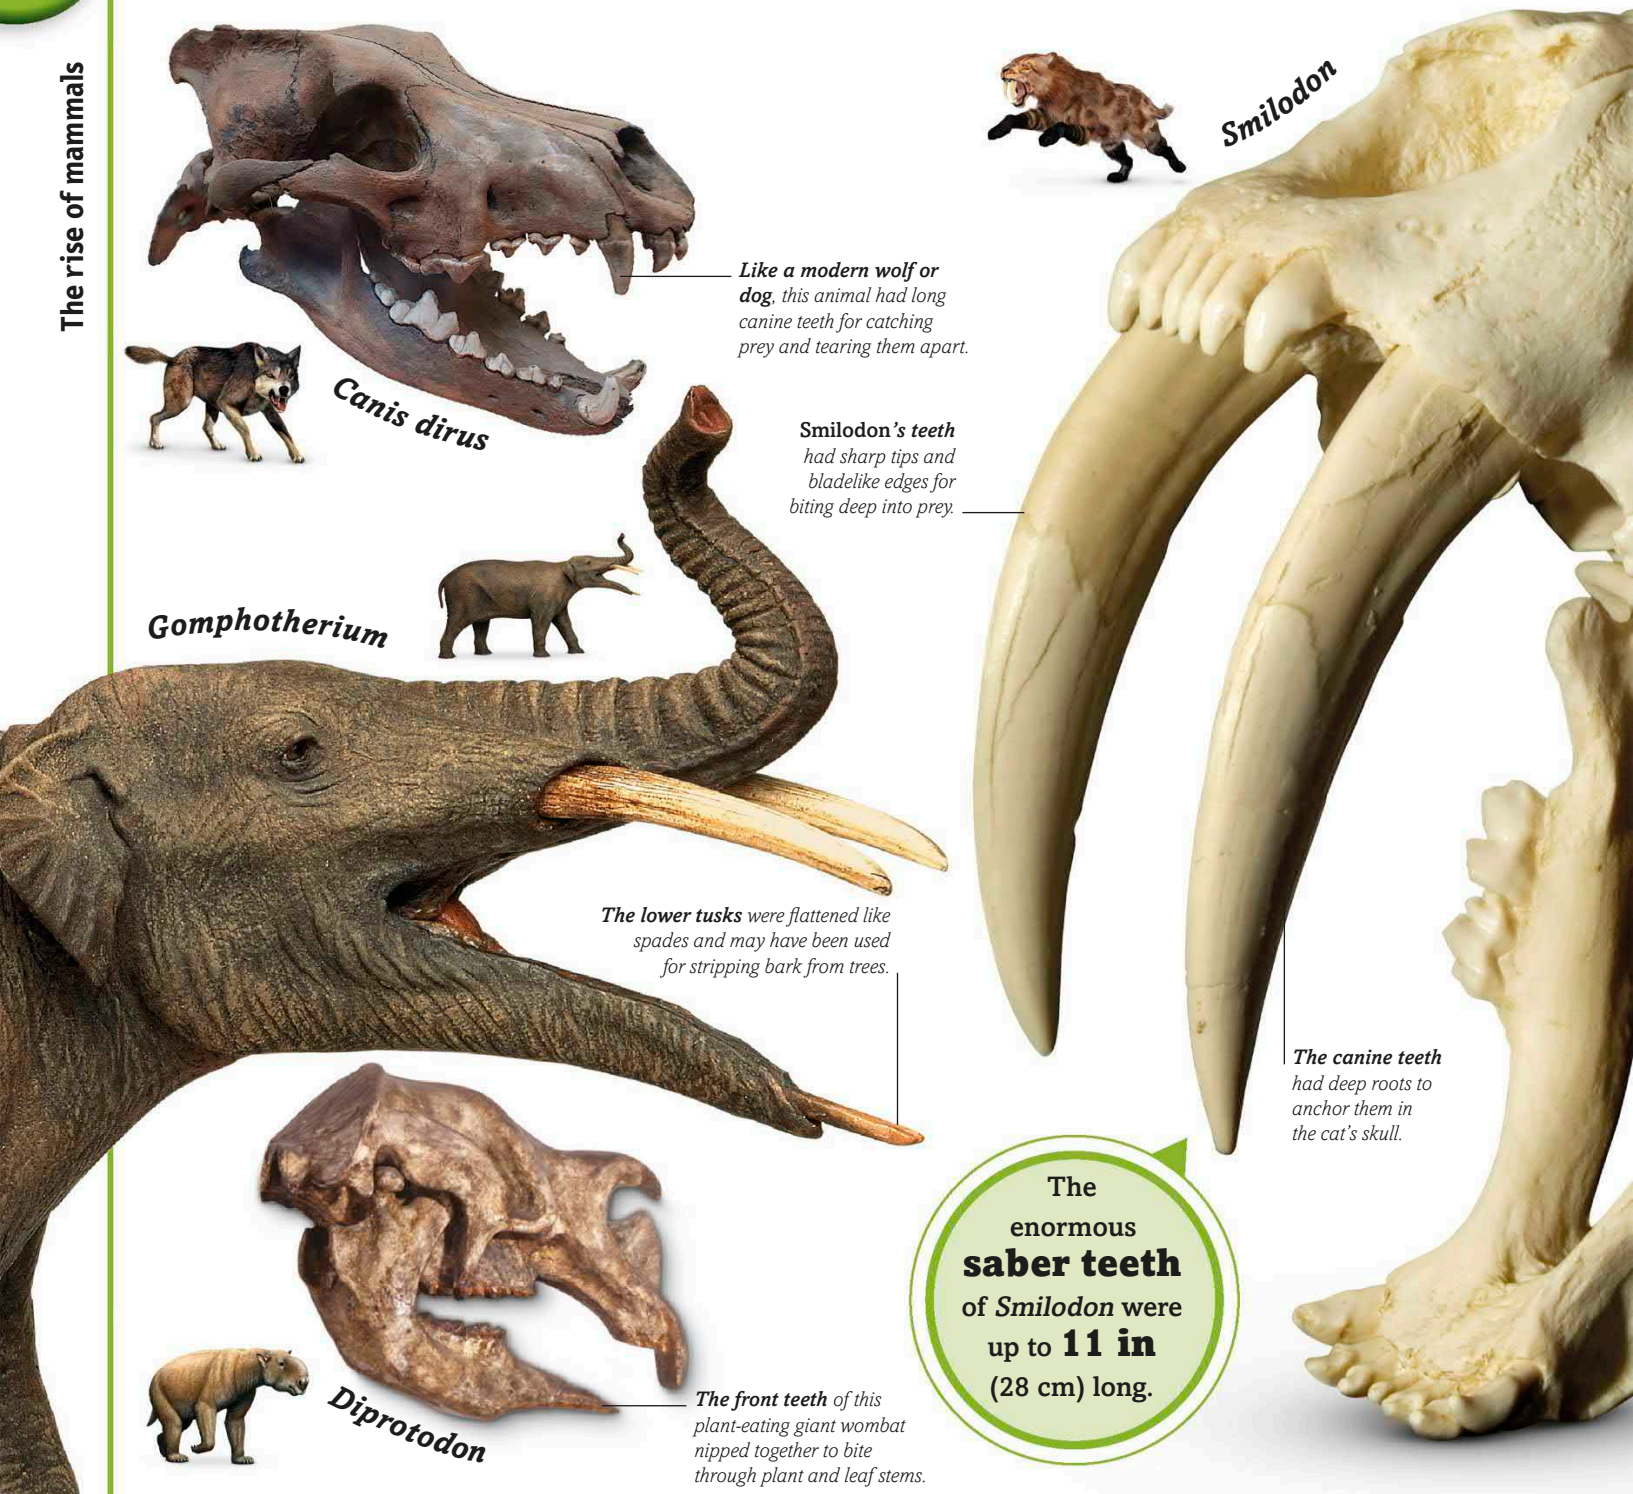

One distinctive feature of a mammal is that it has several types of tooth in its mouth. The basic arrangement is several nipping incisor teeth at the front, four pointed canine teeth adapted for gripping and tearing, and flattened cheek teeth for chewing. This is what humans have. But the teeth of most mammals are modified to suit their diet. The dire wolf, ***Canis dirus***, had longer canines for seizing prey, and some of its cheek teeth were shearing blades for slicing meat. Saber-toothed cats like ***Smilodon*** had huge canine teeth,

WIDE GAPE

Saber-toothed cats had to open their mouths incredibly wide to attack large prey. A modern lion's lower jaw can rotate by 70˚, but *Smilodon* could manage 120˚. This helped it use its saber teeth like daggers to bite into its victim's throats.

meat-slicing cheek teeth, and no chewing teeth at all. The plant-eating woolly rhinoceros ***Coelodonta*** had no canines but had large cheek teeth for grinding tough vegetation. A mammoth had giant chewing teeth, and its incisors had become tusks. Marsupials like ***Diprotodon*** had a pair of very long lower incisors that grew forward from the lower jaw to meet the upper front teeth. All these adaptations, and more, have been inherited by modern mammals, ranging from wolves and lions to elephants and kangaroos.

SABER CHARGE Two hundred years ago, soldiers on horseback charged at enemies while brandishing curved swords called sabers. Twenty thousand years earlier, the big cat *Smilodon* attacked its prey with a pair of huge canine teeth that had the same bladelike form—long, slender, and sharp-edged. *Smilodon* used its saber teeth to bring down formidable prey.

Saber-toothed cats like *Smilodon* lived in an era of giant plant-eating mammals known as megaherbivores. These included many extinct animals, as well as ancestral elephants, rhinos, and bison. Although tempting targets for big predators, these animals were hard to kill because of their size and strength. But *Smilodon* was built for the job, with immensely powerful shoulders and forelimbs, as well as those terrifying teeth. It probably ambushed its prey, leaping onto them and wrestling victims to the ground with its claws. *Smilodon* would then use its long sabers to bite deep into the animal's neck, slicing through major blood vessels with surgical precision. For the victim, it would all be over very quickly.

Ice-age giants

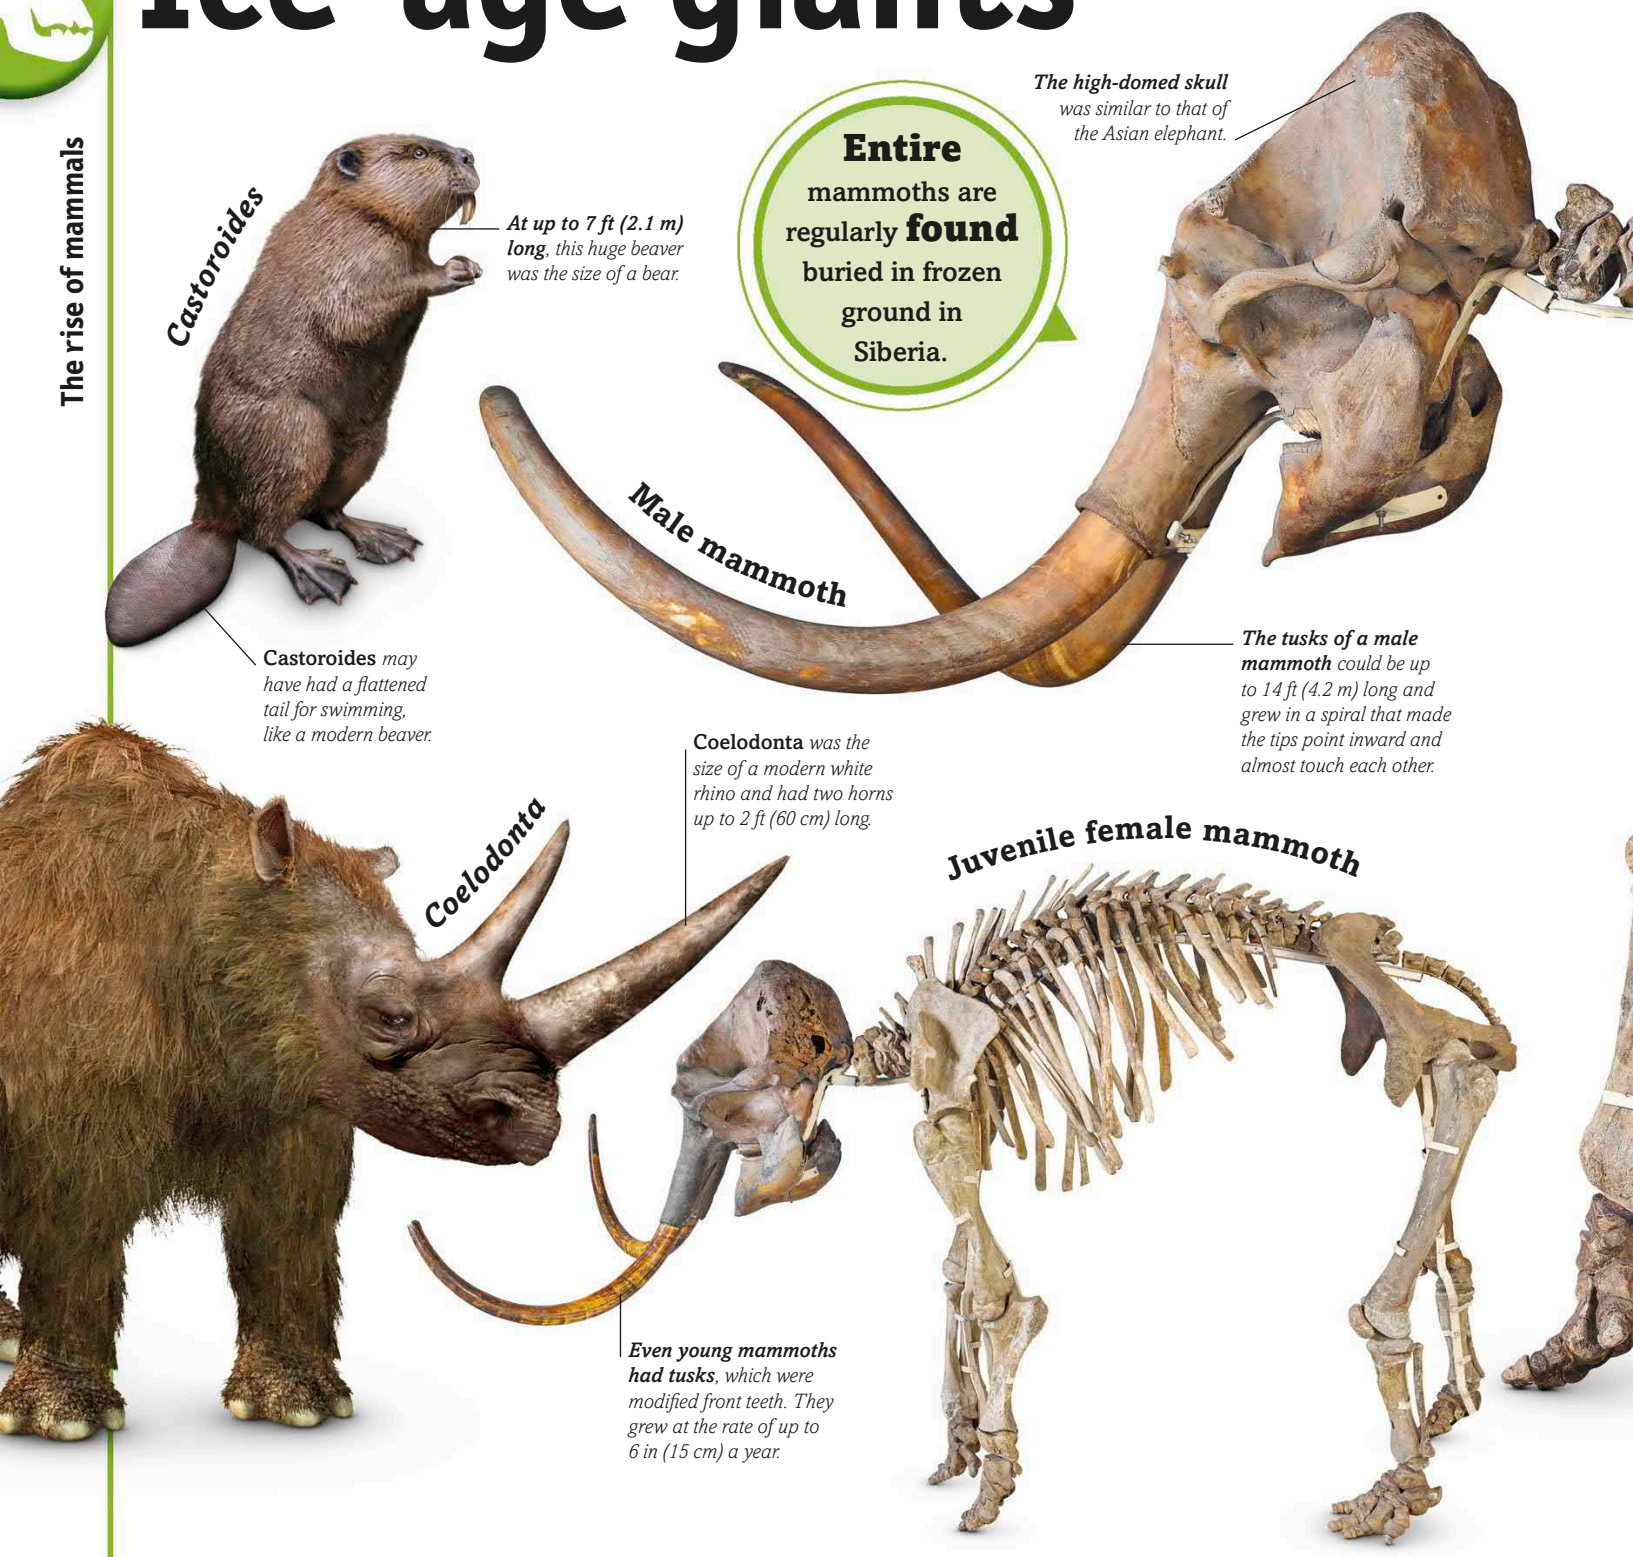

About 2.6 million years ago, the world's climate became cooler triggering a succession of ice ages. During these cold phases, vast ice sheets extended south from the Arctic across much of North America and northern Eurasia. The landscape beyond the ice sheets resembled the snowy, treeless tundra found today in regions like Alaska and Siberia. The southern continents were less affected because they were farther from the pole. During the ice ages, many plant-eating mammals evolved a large body size as an adaptation

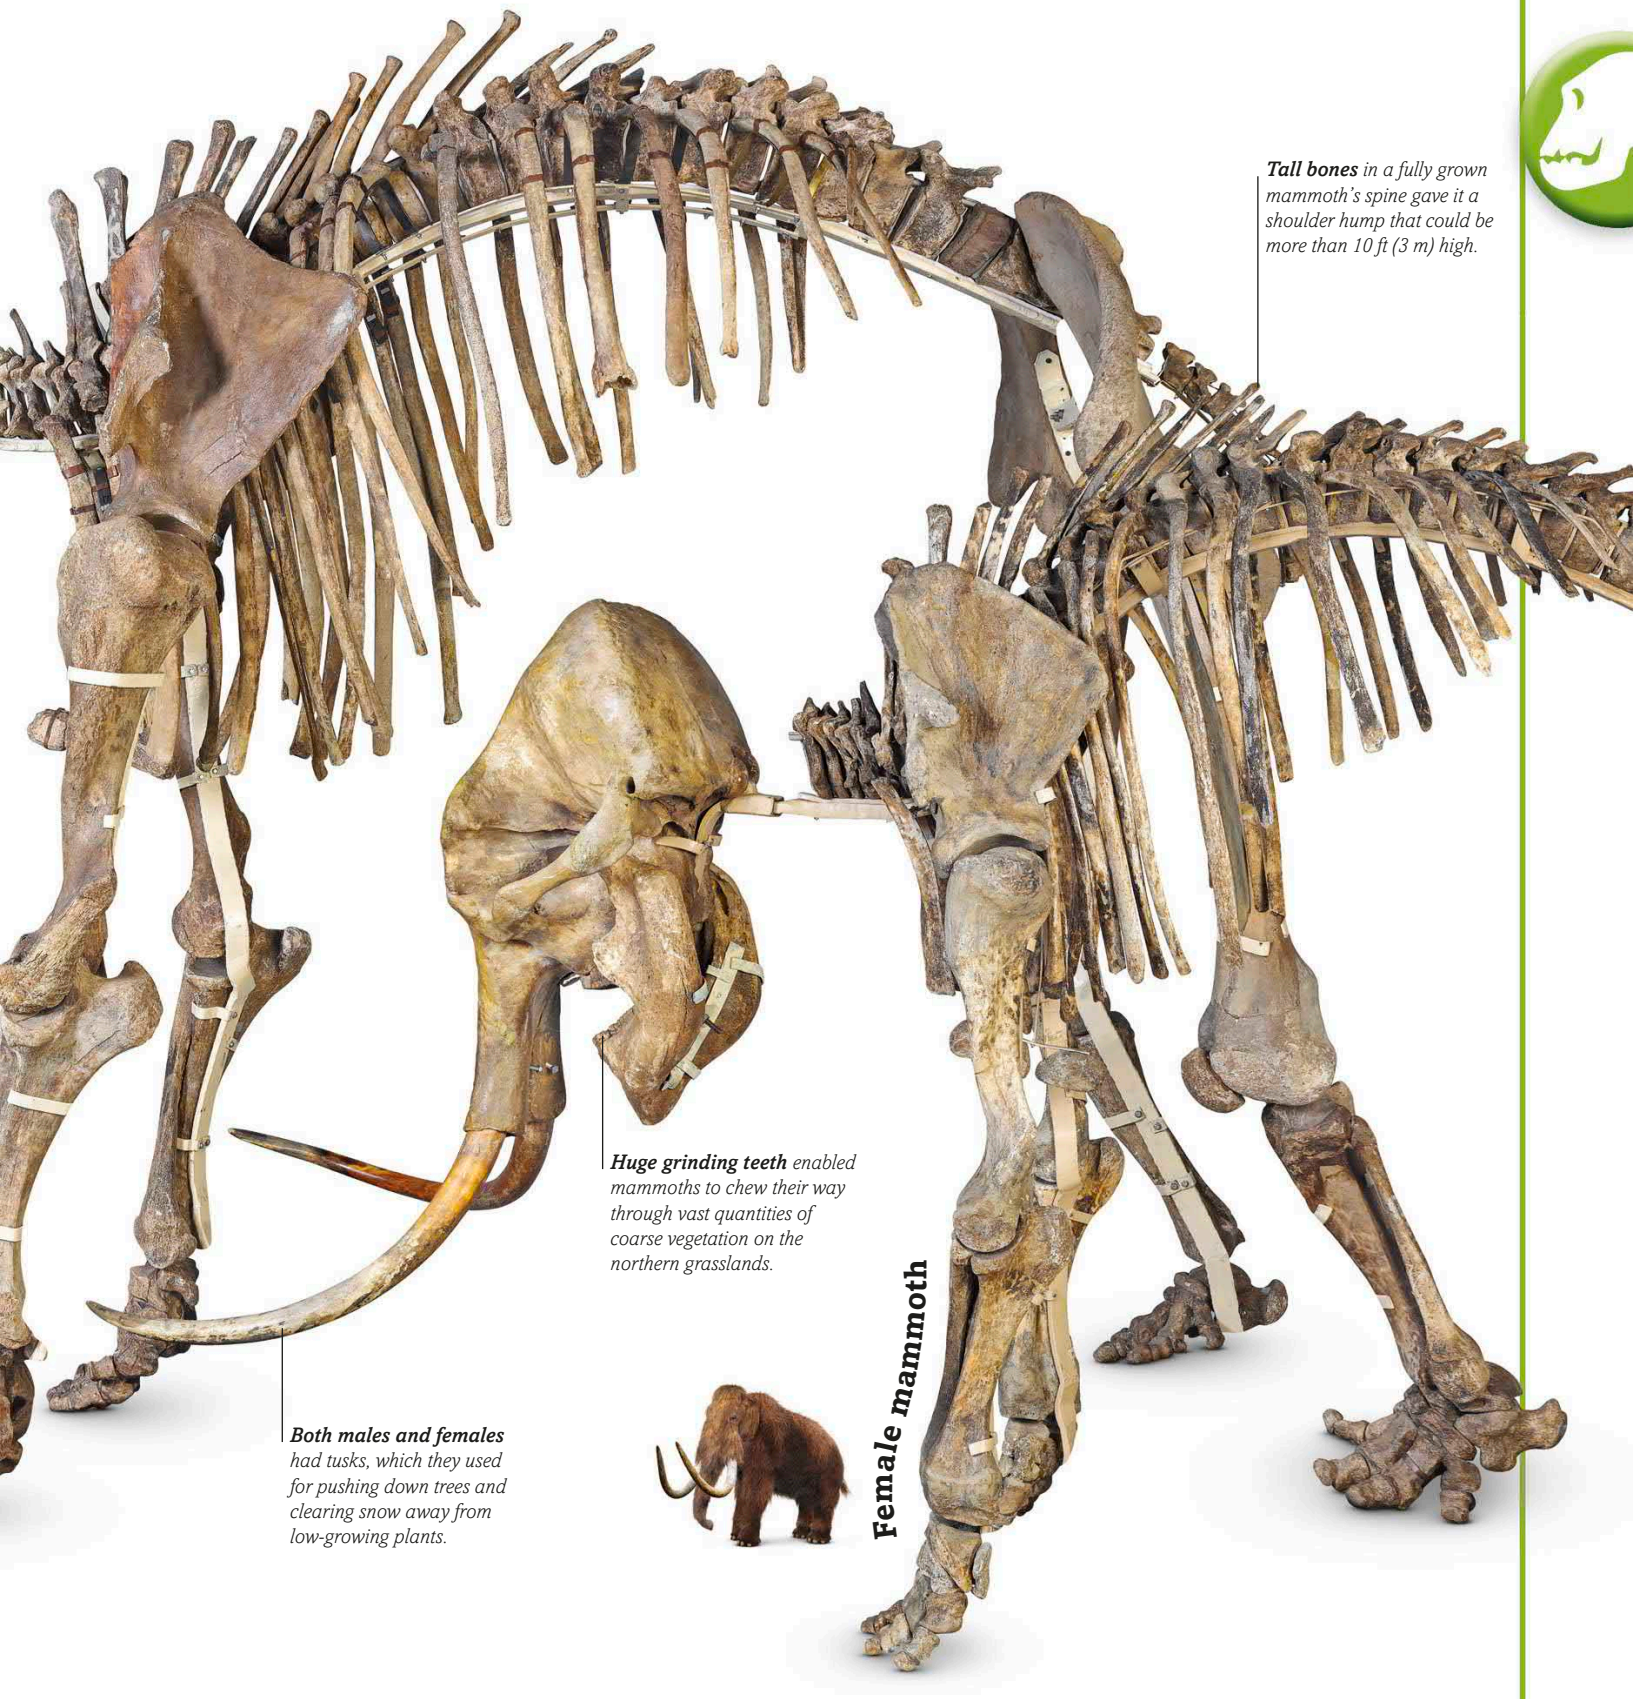

to life in the cold. The **woolly mammoth** and the woolly rhinoceros ***Coelodonta***, for instance, both had thick hair to keep out the cold, and their bulk ensured that they lost body heat less easily than smaller mammals. They lived in the northern tundra and grasslands, but other ice-age mammals, including some types of mammoth, lived farther south where the climate was less harsh, or moved north only during warm periods between the coldest spells. We have been living in one of these warm periods for the last 12,000 years.

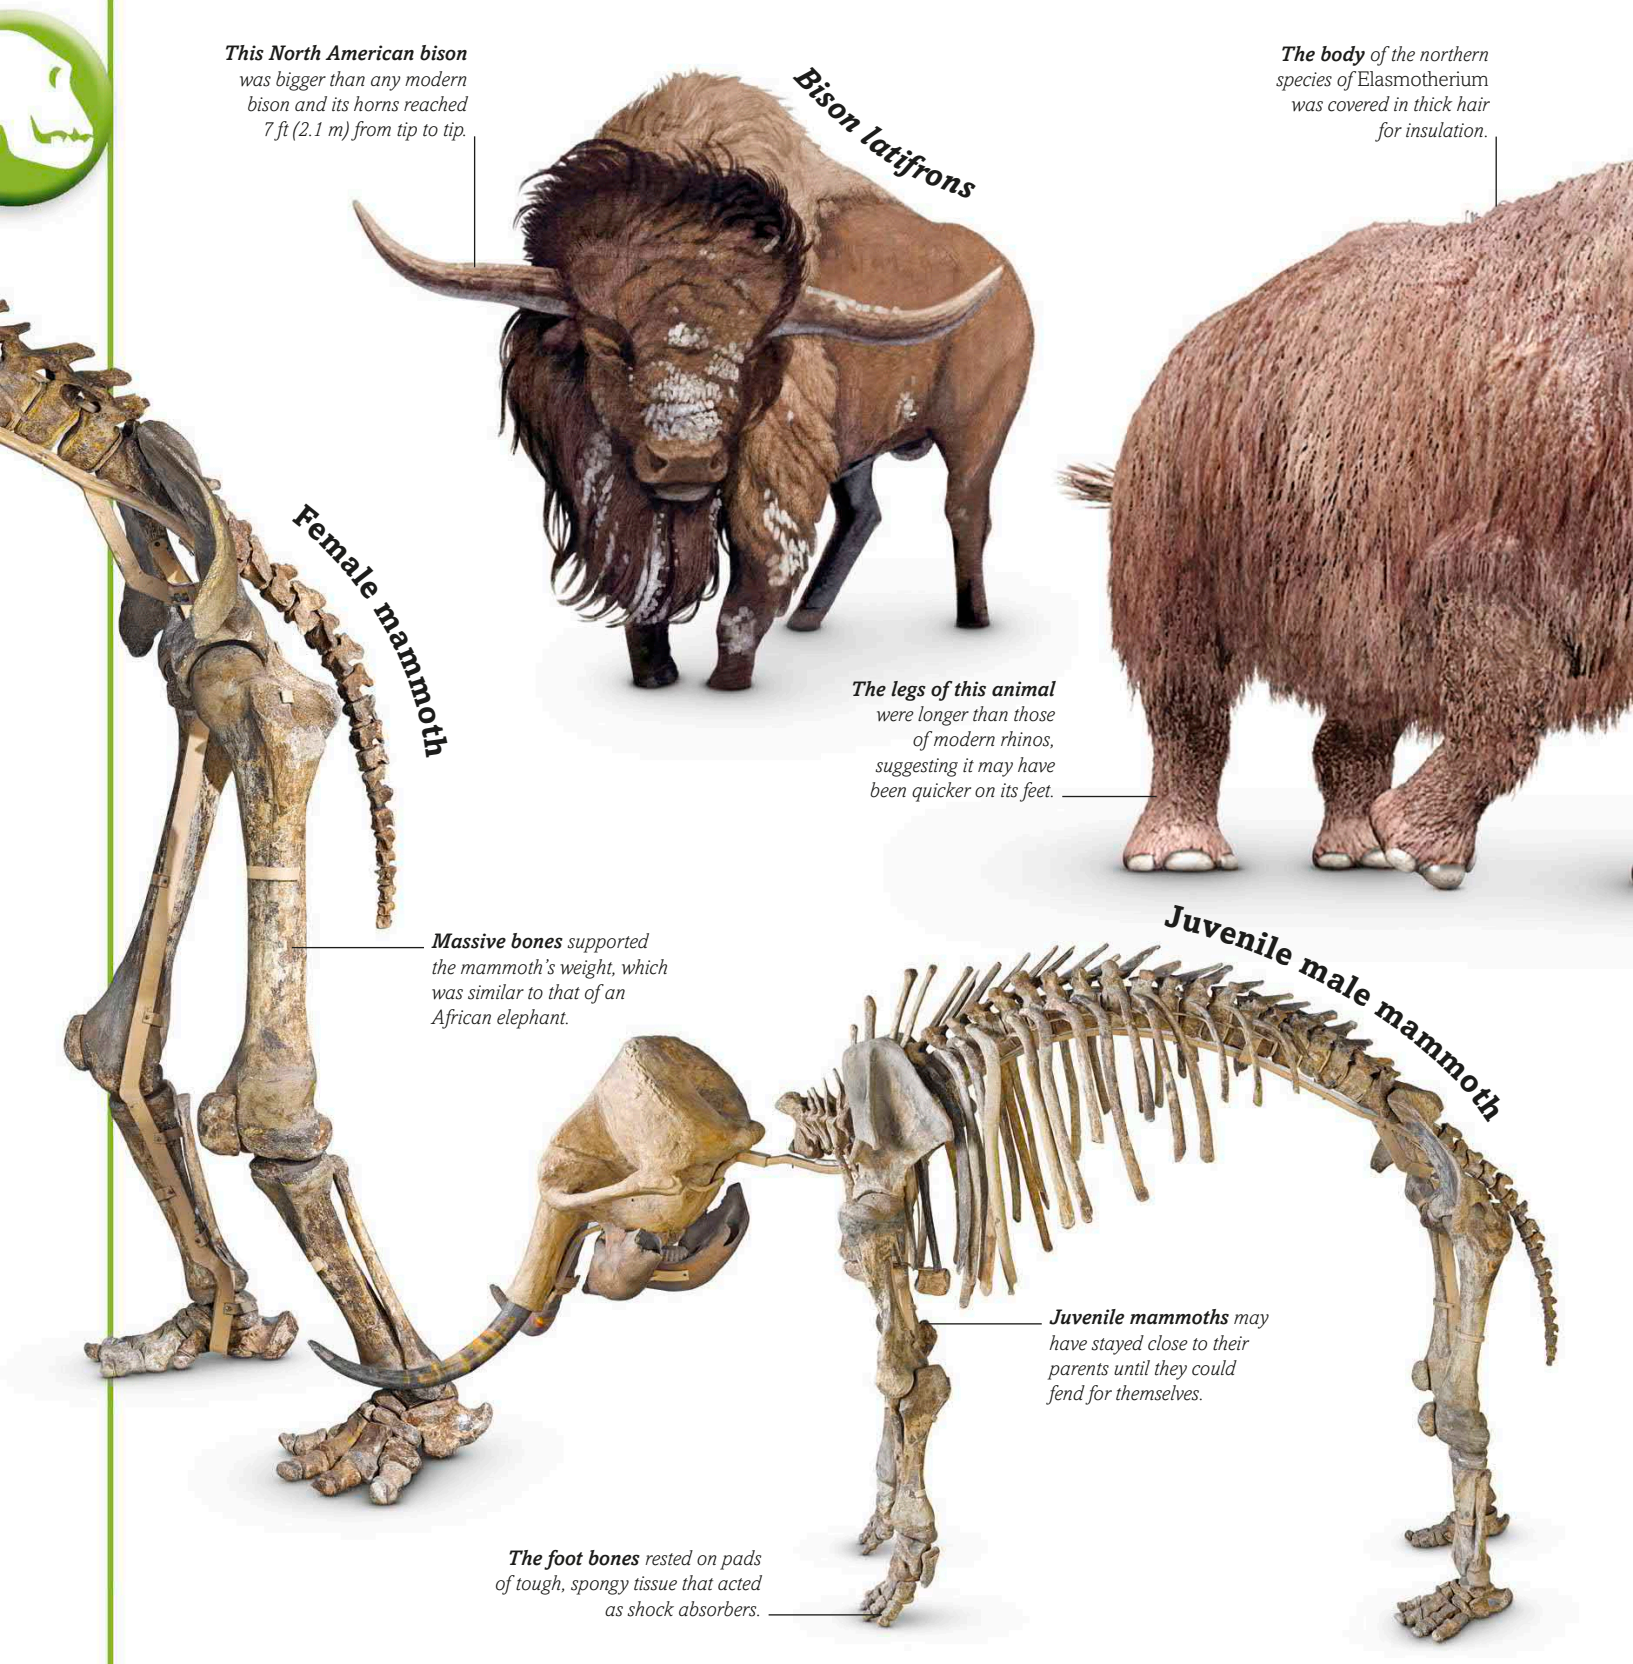

One of the biggest ice-age giants was ***Deinotherium***, a huge elephant relative with down-curved tusks in its lower jaw. It appeared about 10 million years ago but became extinct during the ice ages. Another super-sized animal was ***Elasmotherium***, a type of rhinoceros that lived alongside the **woolly mammoth** in the colder parts of northern Europe and Asia. Farther south there were vast forests that provided a habitat for **bison** and other wild cattle, like the aurochs, *Bos primigenius*, an ancestor of domestic cattle. The open

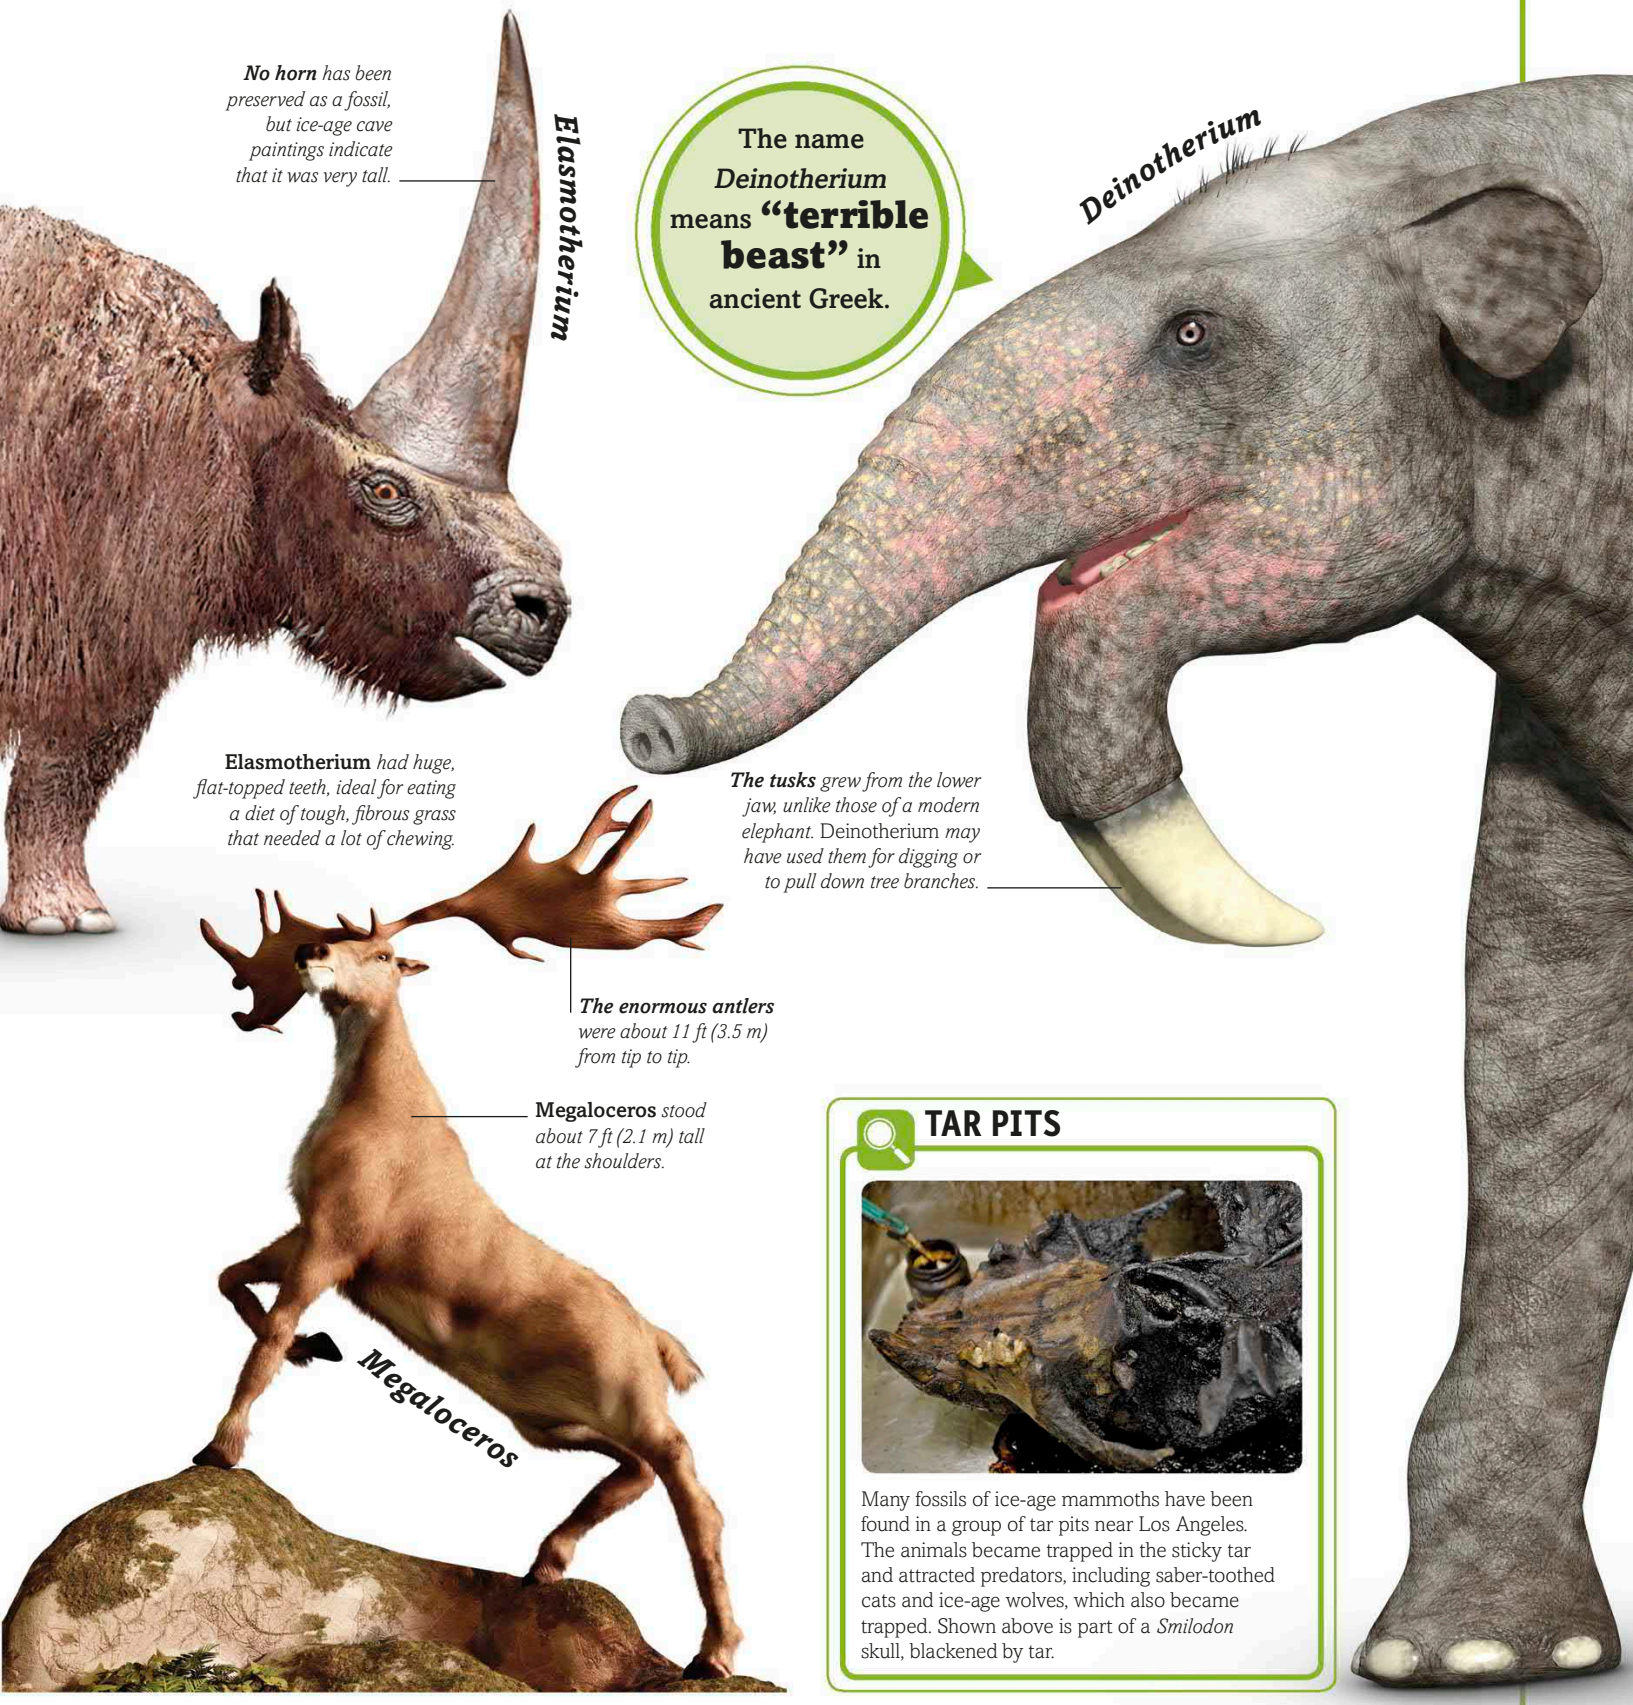

TAR PITS

Many fossils of ice-age mammoths have been found in a group of tar pits near Los Angeles. The animals became trapped in the sticky tar and attracted predators, including saber-toothed cats and ice-age wolves, which also became trapped. Shown above is part of a *Smilodon* skull, blackened by tar.

woodlands of Eurasia were also home to the giant deer ***Megaloceros***. The males had the biggest antlers of all time, which they used to impress females and to spar with rivals. All these animals lived at the same time as early stone-age humans, who would have hunted them for food. Many animals became extinct at the end of the last ice age, about 12,000 years ago. This was partly because of human hunters but also because changing climates eliminated many of their habitats.

Primates

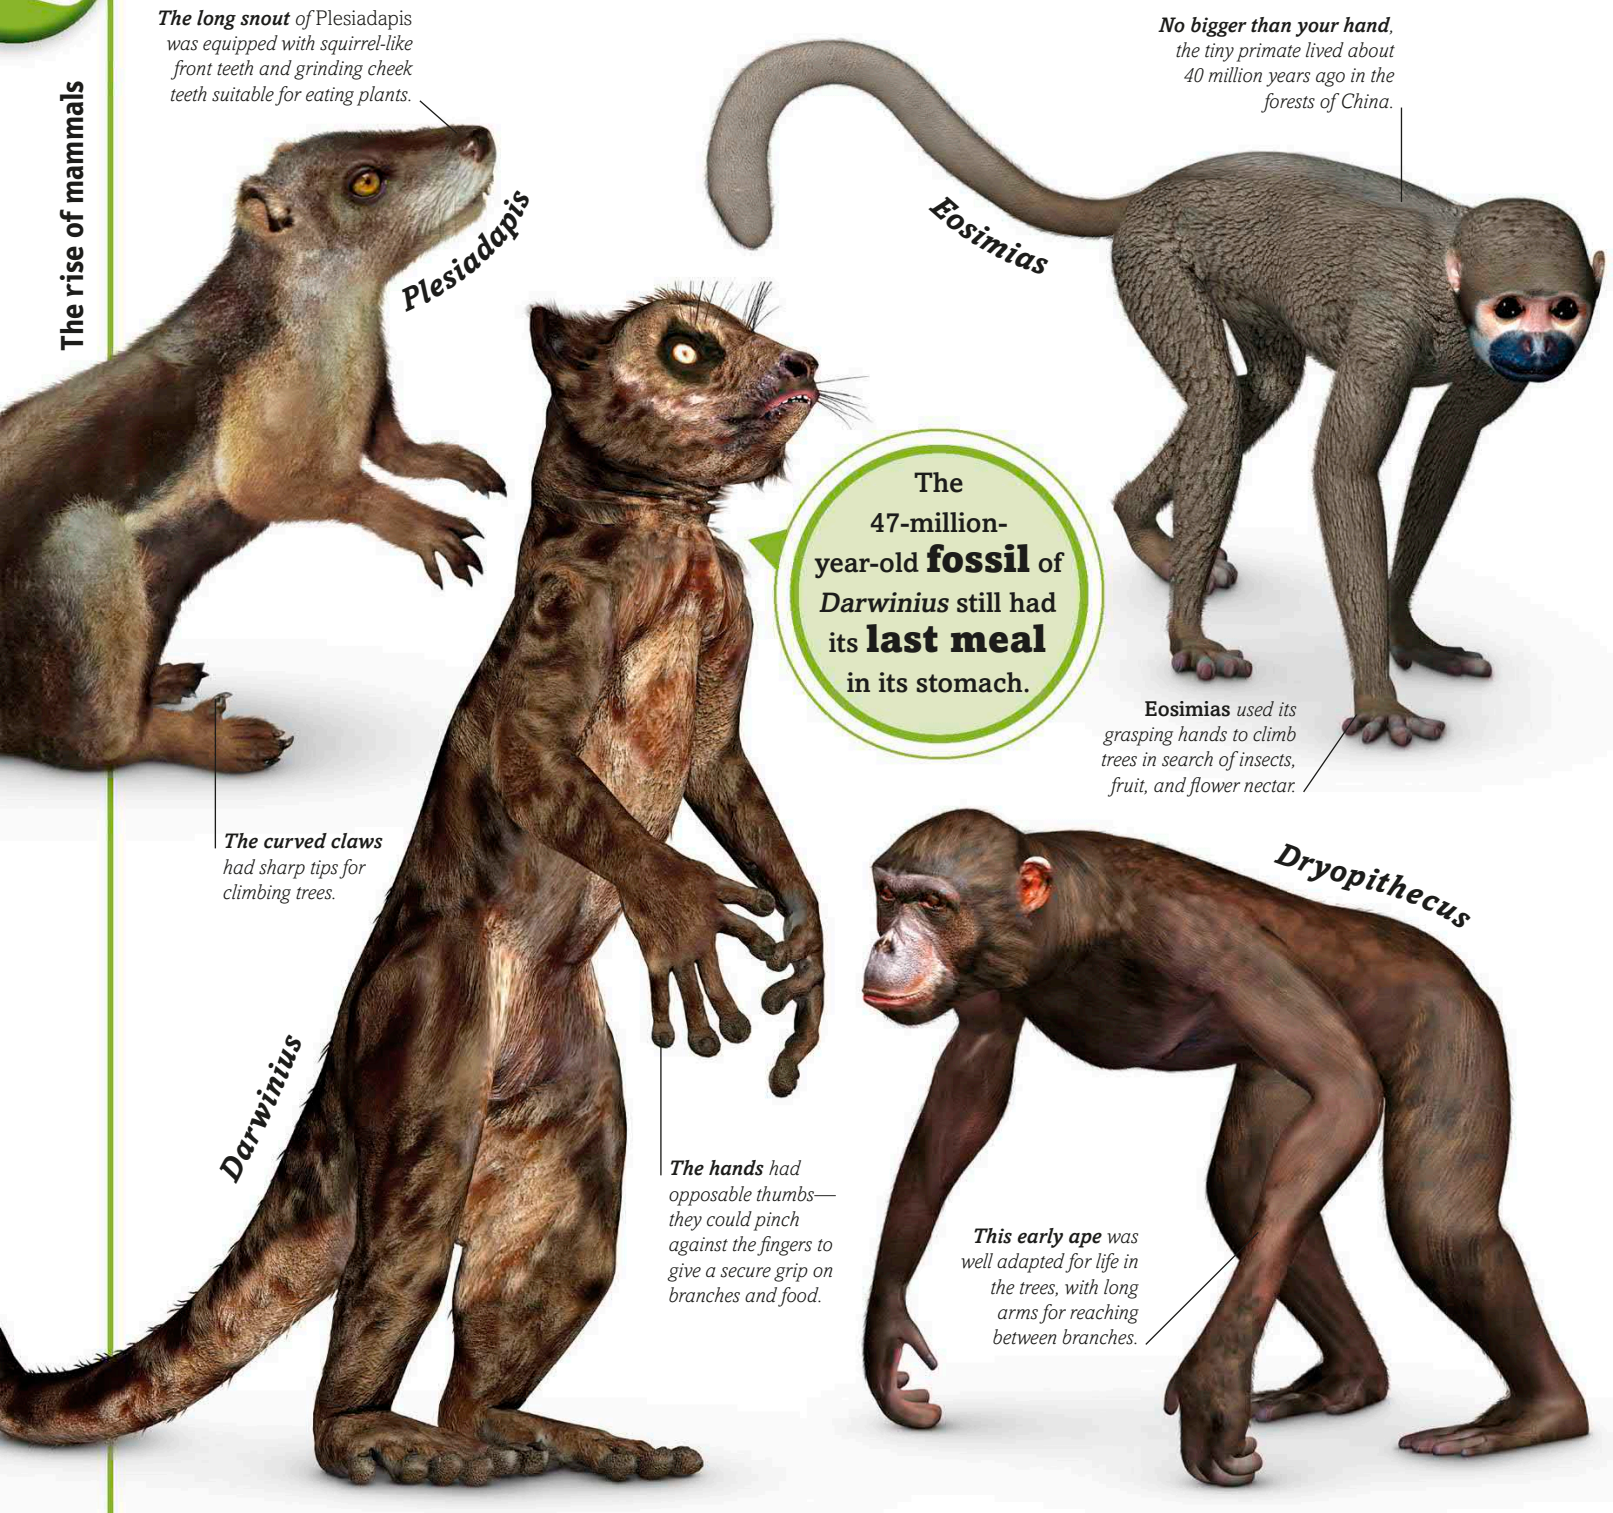

The first primates, such as *Plesiadapis*, appeared about 56 million years ago. They soon split into lemur-type primates, like ***Darwinius***, and early monkeys like ***Eosimias***. The oldest-known apes were alive about 25 million years ago. Their descendants were mostly tree-dwelling animals such as ***Dryopithecus***, which would have walked on all fours when on the ground. However, some later apes adapted to life on the ground by walking upright on their hind legs. They included our own ancestors.

Early humans

Only the skull *of this North African ancestor has been found, so we cannot be sure whether it walked upright or not.*

Sahelanthropus

Very similar to modern humans*, the neanderthals were sturdy people adapted for life in the cold climate of ice-age Europe.*

Homo neanderthalensis

Homo habilis

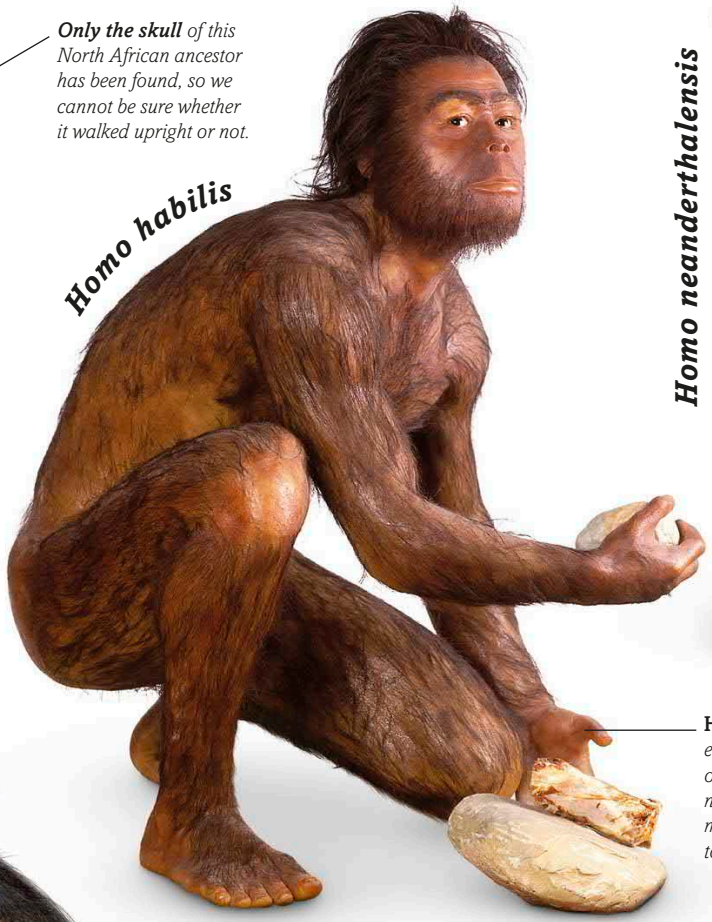

Homo habilis *was the earliest member of our own genus,* Homo. *Its name means "handy man"—it used its hands to make stone tools.*

Living from 4–2 million years ago*, australopithecines walked upright and had a mixed diet of fruit, roots, and meat.*

Australopithecus

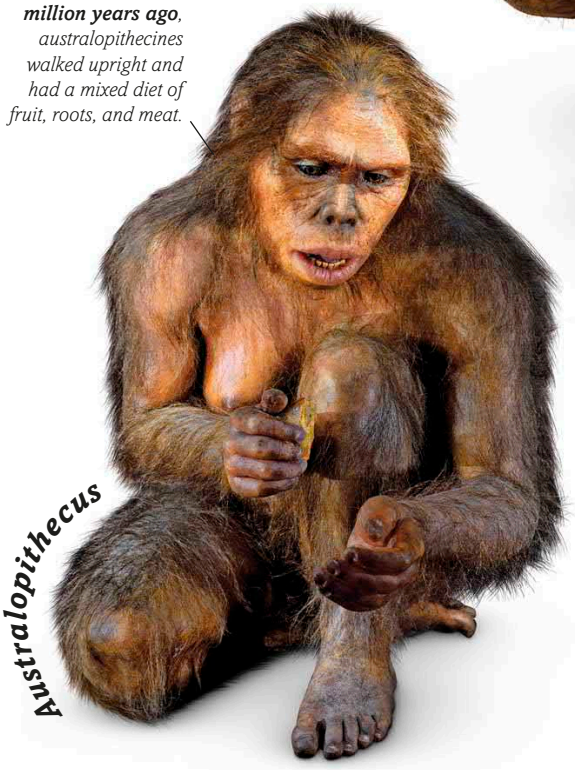

BIGGER BRAINS

The key difference between humans and other apes is intelligence. Our ancestors were walking upright for a while before their brains started getting bigger. As their brains grew, their jaws became smaller. The average brain size of the very early *Homo ergaster* was 52 cubic in (850 cubic cm), increasing in *Homo heidelbergensis* to 75 cubic in (1,225 cubic cm), and finally 82 cubic in (1,350 cubic cm) in modern *Homo sapiens.*

1.8 MYA–600,000 YA	600,000 YA–250,000 YA	150,000 YA–PRESENT
Homo ergaster	***Homo heidelbergensis***	***Homo sapiens***

The earliest ancestors of humans were very like *Dryopithecus*. *Sahelanthropus* may have been one of the first apes to walk upright. It lived in Africa 7 million years ago and had a brain no larger than that of other apes. By about 3.6 million years ago, ***Australopithecus*** was clearly walking upright: its fossil footprints, similar to our own, have been found in East Africa. Over time, there were many *Australopithecus* species, followed by several *Homo* species. The first modern humans, *Homo sapiens*, evolved in Africa at least 200,000 years ago.

WINDOW TO THE PAST

In September 1940, an 18-year-old boy climbed into an unexplored cave at Lascaux, southern France, and discovered scenes of prehistoric wonder—a record of animal life at least 17,000 years old. Decorated with more than 900 images, the cave walls depict herds of galloping wild horses, deer, and prehistoric cattle known as aurochs.

During the last ice age, vast areas of northern Europe were snowy tundra, but in southern France, the landscape was a patchwork of forests and grasslands that supported a wealth of wild animals. They were hunted by people who were just like us, but with the different skills needed to survive at the time. The cave walls show that their abilities extended well beyond survival. The paintings were drawn by people who had studied the living animals and carried the memory of them deep into the cave. They were people with curiosity, imagination, culture, and creativity. In other words, they were among the first to show evidence of the defining feature of modern humanity—civilization.

Glossary

This **bony fish**, *Cladoselache*, had a skeleton made of cartilage.

Adaptation
A feature of a living thing that helps it thrive in its environment and lifestyle. Adaptations are passed on to offspring and evolve over generations.

Allosauroids
A group of theropod dinosaurs that lived during the Jurassic and Cretaceous Periods.

Ammonite
A mollusk, related to squid, that had a coiled, chambered shell and lived in Mesozoic seas.

Amphibian
A cold-blooded animal that spends part of its life in water, such as a frog. They breathe through their gills in early life, but as adults they live on land and breathe air through their lungs.

Ancestor
An animal or plant species from which a more recent species has evolved.

Ankylosaurs
Four-legged, armored, plant-eating dinosaurs with bony plates that covered the neck, shoulders, and back.

Antenna
Movable sense organ on the head of animals such as insects.

Archaea
Microscopic organisms that resemble bacteria but are only very distantly related. Some Archaea live in extreme environments, such as scalding or very salty water.

Archosaurs
A group of related reptiles that includes extinct dinosaurs, birds, pterosaurs, and crocodylians. They first appeared in the Triassic Period.

Arthropod
An invertebrate animal with a segmented body and a hard outer covering (exoskeleton). Extinct arthropods include trilobites. Living examples include insects and spiders.

Bacteria
Microscopic, single-celled organisms with no cell nuclei. Bacteria are the most abundant organisms on Earth.

Bipedal
Walking on two feet rather than four. Humans and birds are bipedal, as were many dinosaurs.

Bony fish
Fish with a skeleton made of bone. Bony fish are one of the biggest groups of bony animals, or vertebrates. As well as familiar fish like tuna, herring, and salmon, the group also includes the ancestors of tetrapods.

Breeding colony
A large group of animals that has gathered to breed in one place.

Brood
In birds, to sit on eggs or nestlings to keep them warm.

Camouflage
A disguise that helps an animal to blend in with its surroundings.

Carnivore
An animal that eats meat.

Ceratopsians
Plant-eating dinosaurs, with a deep beak and a bony frill at the back of the skull. Many, including *Triceratops*, had facial horns.

Chitin
An organic substance that forms the exoskeleton of insects and other arthropods.

Compound eye
An eye formed from a mosaic of many smaller eyes. Insects have compound eyes.

Creodonts
An extinct group of flesh-eating mammals.

Cyanobacteria
Bacteria that can use sunlight to manufacture their own food by photosynthesis.

Cynodonts
A group of synapsids that arose in the Late Permian (*see also* Synapsids).

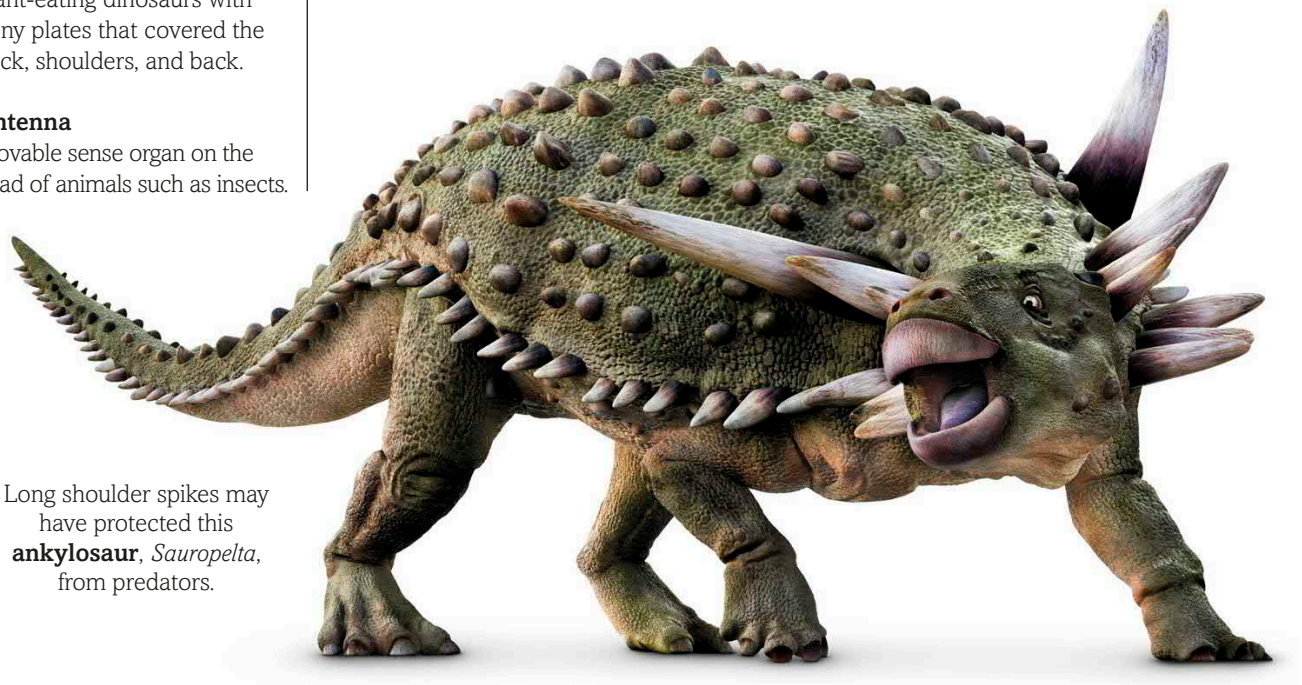

Long shoulder spikes may have protected this **ankylosaur**, *Sauropelta*, from predators.

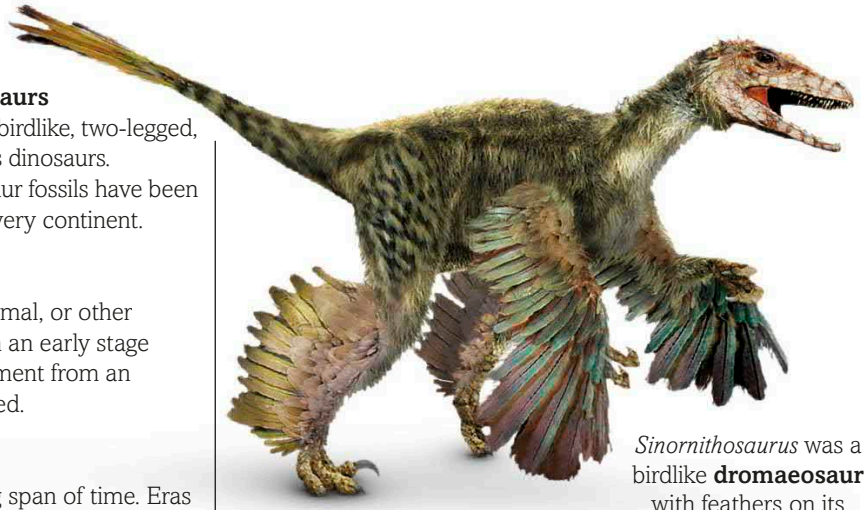

Sinornithosaurus was a birdlike **dromaeosaur** with feathers on its arms and legs.

Dromaeosaurs
A group of birdlike, two-legged, carnivorous dinosaurs. Dromaeosaur fossils have been found on every continent.

Embryo
A plant, animal, or other organism in an early stage of development from an egg or a seed.

Era
A very long span of time. Eras are divided into shorter spans called Periods. The Mesozoic Era, for example, is divided into the Triassic, Jurassic, and Cretaceous Periods.

Evolution
The gradual change of species over many generations as they adapt to their changing environment.

Exoskeleton
An external skeleton. Animals such as crabs have an exoskeleton. In contrast, humans have an internal skeleton.

Extinction
The dying out of a plant or animal species. Extinction can happen naturally as a result of competition between species, changes in the environment, or natural disaster.

Filaments
Thin, hairlike structures.

Fossil
The remains of something that was once alive, preserved in rock. Teeth and bones are more likely to form fossils than softer body parts, such as skin.

Fossilization
The process by which dead organisms turn into fossils. Fossilization often involves replacement of the original organism with rock minerals.

Frond
A leaf that is divided into many parts—for example, the leaf of a fern or a palm.

Gravity
The force of attraction that pulls objects to the ground.

Hadrosaurs
Also known as duck-billed dinosaurs. Large, bipedal and quadrupedal plant-eaters from the Cretaceous Period. They had a ducklike beak that was used for browsing on vegetation.

Herbivore
An animal that eats plants.

Ice age
A period of time during which global temperatures fall and sheets of ice (glaciers) cover large areas of land.

Ichthyosaurs
A group of marine reptiles that first appeared in the Triassic Period. Ichthyosaurs had streamlined bodies similar to present-day dolphins. They became extinct before the end of the Cretaceous Period.

Iguanodontians
Large, plant-eating dinosaurs that were common in the early Cretaceous Period.

Invertebrates
Animals without backbones.

Jawless fish
A class of primitive vertebrates that flourished mainly in Early Paleozoic times. They include extinct groups and the living hagfish and lampreys.

Keratin
A tough structural protein in hair, feathers, scales, claws, and horns.

Leaflet
A small, leaflike part of a divided leaf.

Lobed-finned fish
A type of fish that has fleshy, muscular fins. Lobe-finned fish were the ancestors of all four-limbed vertebrates, including humans.

Mammal
An animal that is warm-blooded, covered in hair, and suckles its young.

Mammoth
A type of elephant with long tusks that lived during the Pliocene and Pleistocene. During the last ice age, some mammoths developed long hair, which helped them stay warm.

Marsupials
A group of mammals in which offspring are born in an undeveloped state and typically continue to grow inside a pouch on the mother.

Mesozoic
The era of time that includes the age of dinosaurs. It began 251 million years ago and ended 66 million years ago.

Microbe
Short word for "microorganism."

Microorganism
Any living creature that is too small to see without a microscope.

Monotremes
Egg-laying mammals, including the platypus and the echidnas (spiny anteaters). This egg-laying habit is thought to be the original mode of reproduction for mammals.

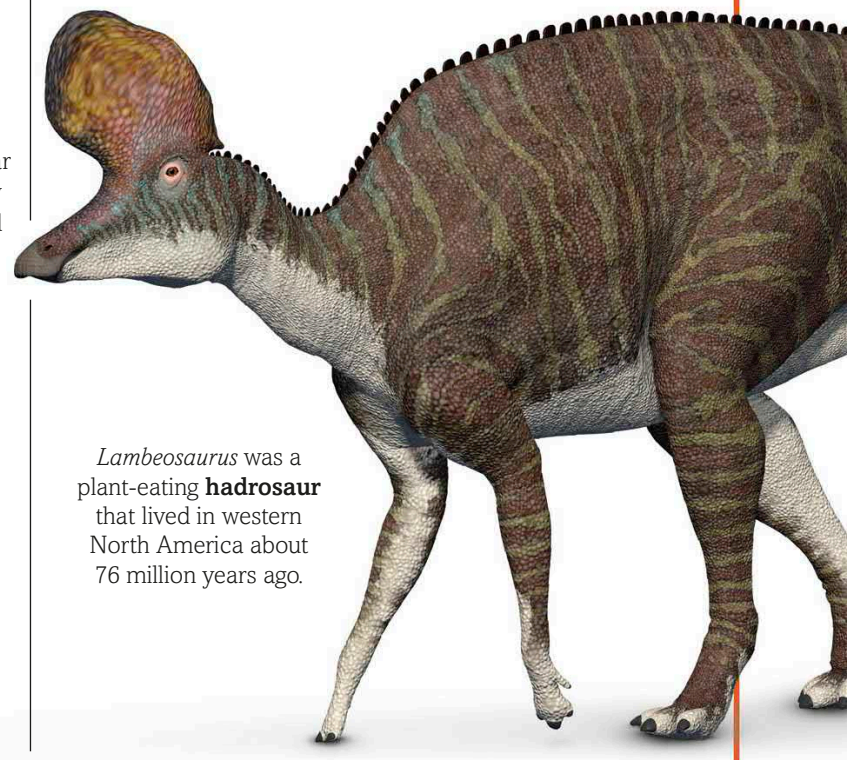

Lambeosaurus was a plant-eating **hadrosaur** that lived in western North America about 76 million years ago.

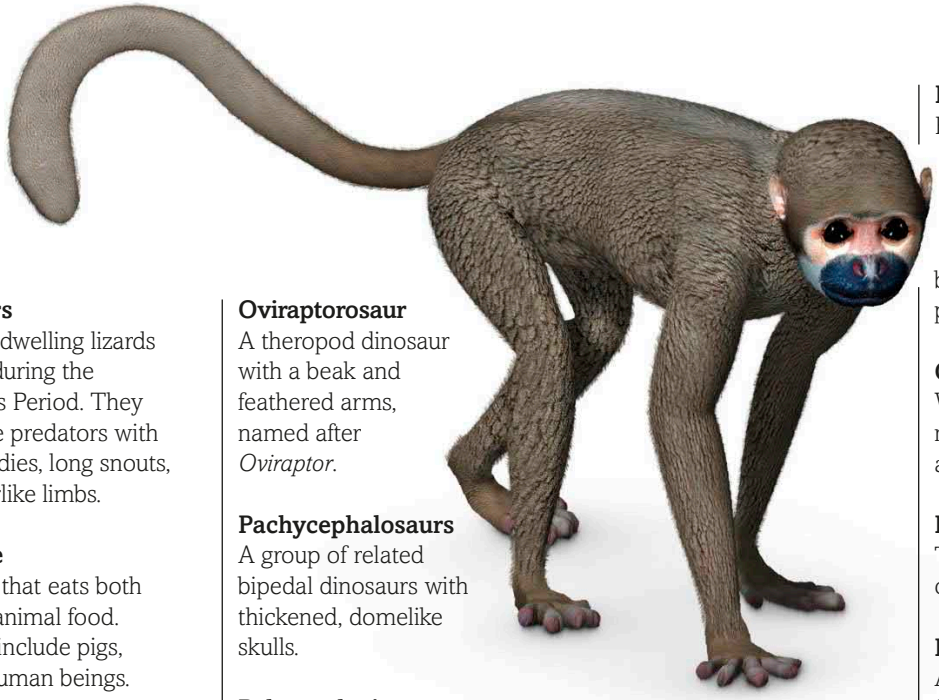

Eosimias, a tiny prehistoric **primate**, was only about 2 in (5 cm) long.

Mosasaurs
Giant, sea-dwelling lizards that lived during the Cretaceous Period. They were fierce predators with slender bodies, long snouts, and flipperlike limbs.

Omnivore
An animal that eats both plant and animal food. Examples include pigs, rats, and human beings.

Ornithomimosaurs
Birdlike dinosaurs that were built like ostriches. They were the fastest animals on land in the Cretaceous Period.

Oviraptorosaur
A theropod dinosaur with a beak and feathered arms, named after *Oviraptor*.

Pachycephalosaurs
A group of related bipedal dinosaurs with thickened, domelike skulls.

Paleontologist
A scientist who studies the fossil remains of plants and animals.

Palps
A pair of segmented, armlike structures in the mouthparts of some invertebrates, such as spiders and scorpions. Also called pedipalps.

Predator
An animal that hunts and kills other animals for food.

Prey
An animal that is killed and eaten by another animal.

Primates
A group of related mammals that includes lemurs, monkeys, apes, and human beings.

Primitive
At an early stage of evolution.

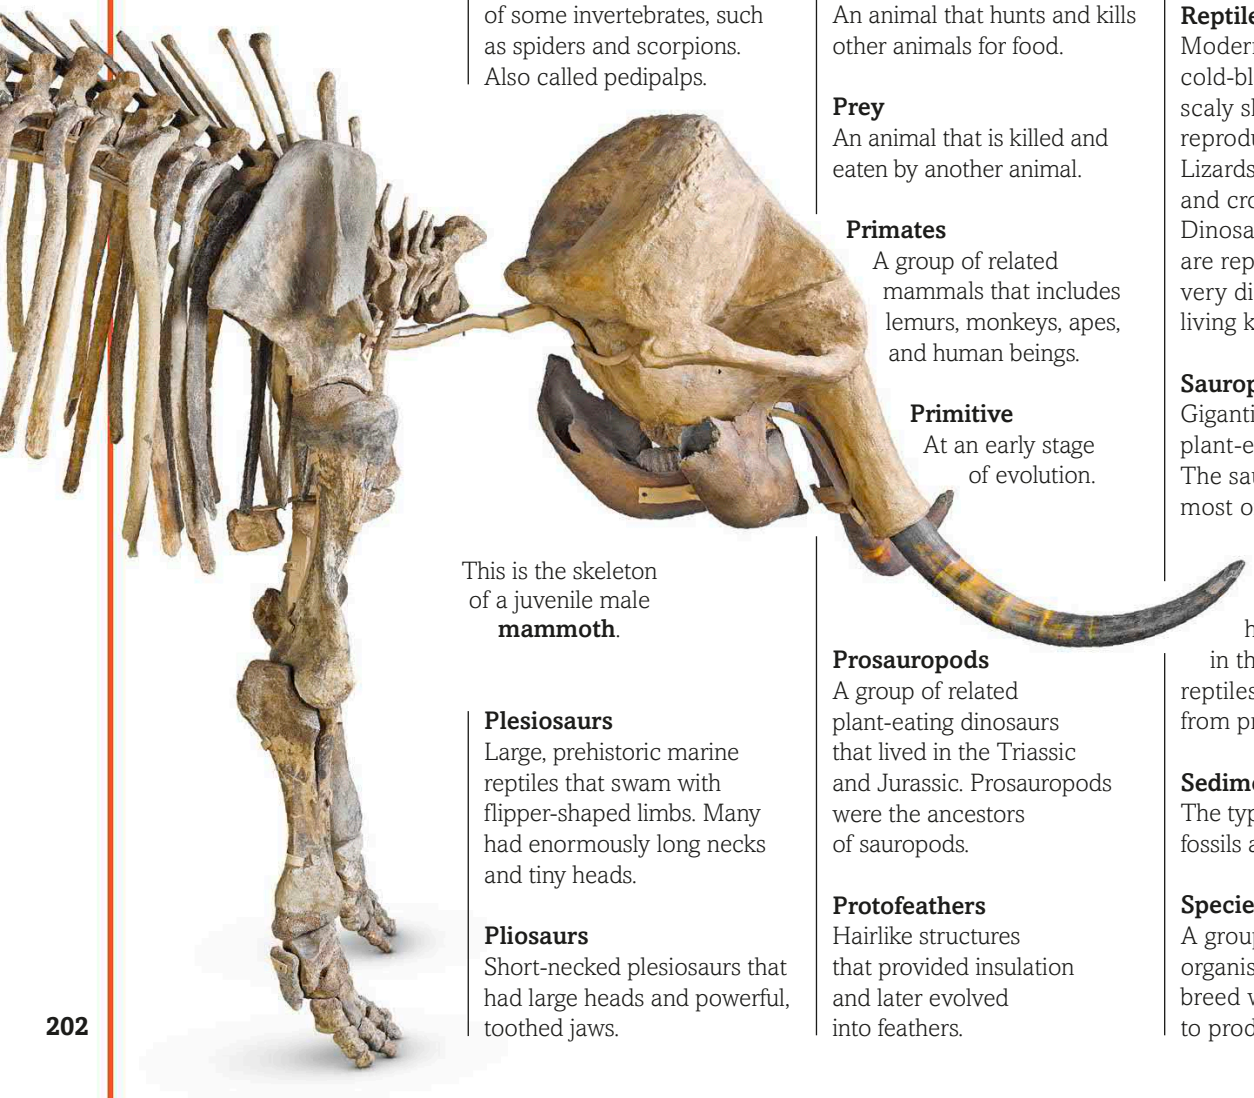

This is the skeleton of a juvenile male **mammoth**.

Plesiosaurs
Large, prehistoric marine reptiles that swam with flipper-shaped limbs. Many had enormously long necks and tiny heads.

Pliosaurs
Short-necked plesiosaurs that had large heads and powerful, toothed jaws.

Prosauropods
A group of related plant-eating dinosaurs that lived in the Triassic and Jurassic. Prosauropods were the ancestors of sauropods.

Protofeathers
Hairlike structures that provided insulation and later evolved into feathers.

Pterosaurs
Flying reptiles that lived during the age of dinosaurs. The wings of pterosaurs consisted of sheets of skin stretched between the limbs. Some pterosaurs were huge.

Quadrupedal
Walking on four legs. Most mammals and reptiles are quadrupedal.

Rachis
The central, hollow shaft of a feather.

Ray-finned fish
A major group of bony fish that includes about 25,000 of today's fish species and many prehistoric species. Ray-finned fish have fins consisting of skin stretched over a fan of thin bones.

Reptile
Modern reptiles are cold-blooded animals with scaly skin and that typically reproduce by laying eggs. Lizards, snakes, turtles, and crocodiles are reptiles. Dinosaurs and their relatives are reptiles too, but were very different from living kinds.

Sauropods
Gigantic, long-necked, plant-eating dinosaurs. The sauropods lived through most of the Mesozoic Era.

Scutes
Bony plates with a horny covering set in the skin of certain reptiles to protect them from predators.

Sedimentary rock
The type of rock in which fossils are found.

Species
A group of similar organisms that can breed with one another to produce offspring.

Spinosaurid
A large theropod dinosaur that had crocodilelike jaws for eating fish, named after *Spinosaurus*.

Spore
A microscopic structure produced, often in large numbers, by plants (except seed plants), fungi, and many microorganisms, from which a new individual can grow. Spores are usually spread by wind or water.

Stegosaurs
Plant-eating, quadrupedal dinosaurs with two tall rows of bony plates running down the neck, back, and tail.

Synapsids
A major vertebrate group, also known as "mammal-like reptiles," that branched off early in the evolution of tetrapods, and eventually gave rise to the mammals.

Tentacle
A long, bendy, armlike body part that aquatic animals use for touching and grasping.

Tetrapods
Vertebrates with four limbs (arms, legs, or wings). All amphibians, reptiles, mammals, and birds are tetrapods.

Therizinosaurs
A group of unusual-looking dinosaurs that lived in the Cretaceous Period and perhaps the Jurassic too. Therizinosaurs were tall with small heads, stumpy feet, and pot bellies.

Theropods
A large branch of the dinosaur family tree made up mostly of predators. Theropods typically had sharp teeth and claws. They ranged from hen-sized creatures to the colossal *Tyrannosaurus*.

Titanosaurs
Very large, four-legged, plant-eating dinosaurs. The titanosaurs were sauropods and included perhaps the largest land animals ever.

Trackway
A trail of fossilized dinosaur footprints.

Tundra
Treeless regions dominated by low-growing, cold-tolerant plants.

Tyrannosaurids
A group of related tyrannosaurs that are especially large and have short arms with two-fingered hands. *Tyrannosaurus* is the most famous member of the group.

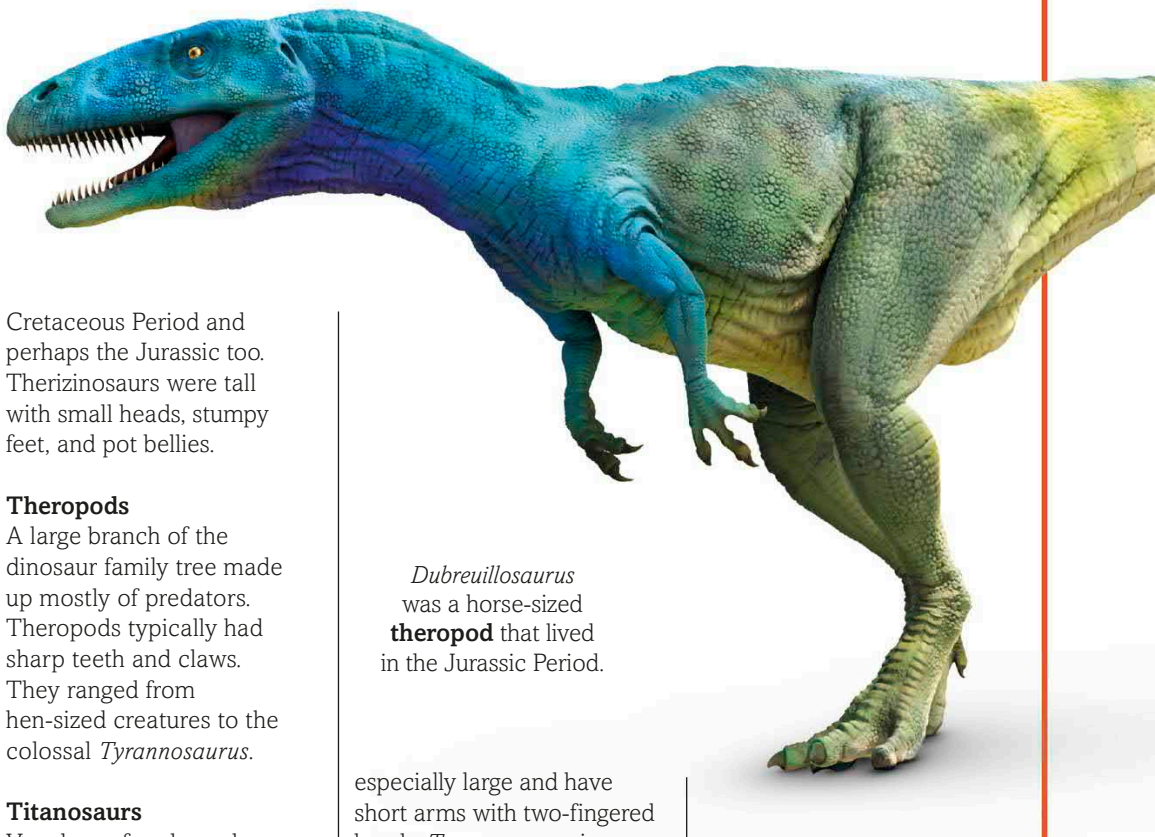

Dubreuillosaurus was a horse-sized **theropod** that lived in the Jurassic Period.

Tyrannosaurs
A group of related theropod dinosaurs that includes tyrannosaurids and all of their close relatives.

Vertebrae
The bones that make up the backbone of an animal such as a dinosaur.

Vertebrates
Animals with an internal bony or cartilaginous skeleton including a skull and a backbone. Fish, amphibians, reptiles, birds, and mammals are all vertebrates.

Warm-blooded
Warm-blooded animals maintain a constant internal body temperature, regardless of the external temperature.

Wingspan
The distance from the tip of one wing to the tip of the other when both wings are outstretched.

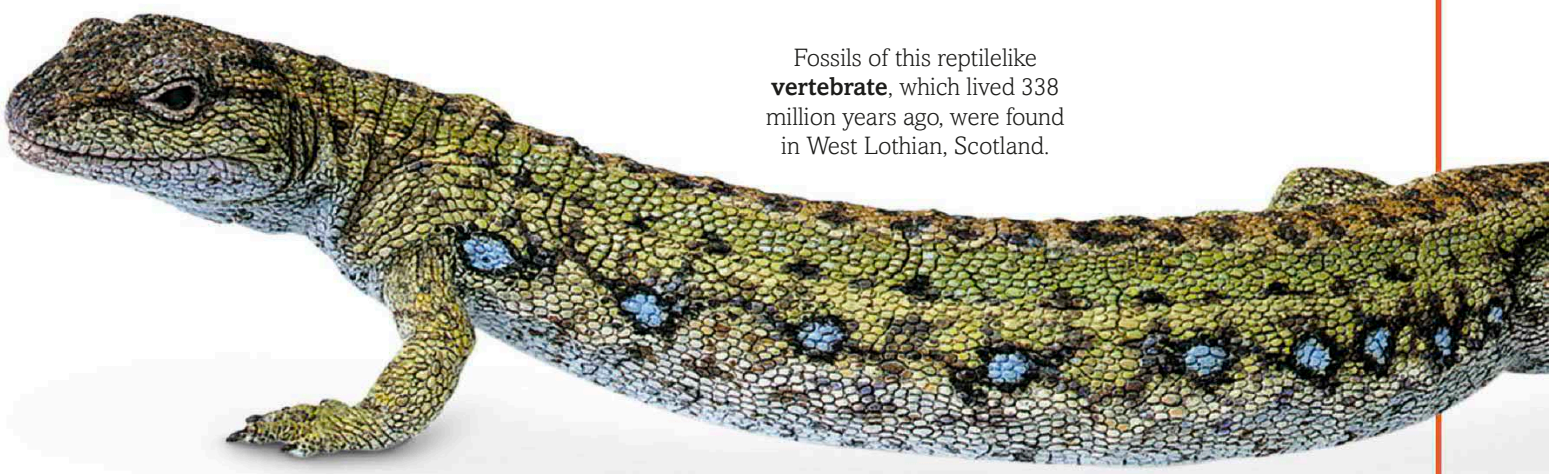

Fossils of this reptilelike **vertebrate**, which lived 338 million years ago, were found in West Lothian, Scotland.

Index

A

Africa 15, 31, 70, 74, 185
  early humans 197
Allosaurus 14, 79, 107, 124
Alxasaurus 11, 82, 83, 123
Amargasaurus 65, 67
amber 13, 77, **172–173**
ammonites 12, 158, 159
Ampelosaurus 70, 71
amphibians 9, 23, **50–51**
ankylosaurs 25, 77, **80–81**, 82, 87
Ankylosaurus 80–81
Anomalocaris 32
antlers 184–185
Antarctica 15, 45, 80, 91,104
ants 171
Apatosaurus 65, 73, 107, 124
apes 196
Archaea 17
Archaeopteryx 137, **138–139**
  fossil of 14, 20, 21
archosaurs 24, 55, 57, **60–61**, 161
Argentina 14, 62, 69, 140, 143, 181
Arizonasaurus **56–57**
armadillos 176, 179
armor
  dinosaurs 33, 36, 70, 80, 81, 133
  fish 38, 40–41
  mammals 176
  marine reptiles 161
arms 63, 64, 65, 107, 110, 118–119, 126
  mammals 177
arthropods 8, 36, **46–47**
Asia 80, 88, 194
Astraspis 38
Atlasaurus 118
Australia 15, 18, 31, 85, 143
  marsupials 180, 181

B

bacteria 42, 43
Barapasaurus 11, 64
Baryonyx 108, 109, 124
bats 179
beaks 87, 99, 114, 115, 117
  ankylosaurs 81
  birds 141, 143
  iguanodontians 84
  pachycephalosaurs 96
  pterosaurs 155
  stegosaurs 75
bears 186
bees 170
beetles 171
belemnites 159
birds 8, 9, 21, 26, 55, 172
bison 194
bones 27, 50, 61, 69, 195
  arms 64
  crests 88, 90, 154
  feet 115, 194
  fingers 148, 151, 162
  fish 38, 39, 41
  hands 64, 69
  hips 24, 26, 61
  legs 23, 61, 194
  necks 22, 66–67
  spines 22, 54, 162, 193
  tails 22, 77, 80
  see also jaws; skulls
brains 26, 75, 97, 117, 135
  humans 197
  pterosaurs 148, 150
Brontomerus 64, 65
Buitreraptor 126, 134
Burgess Shale 14, **34–35**, 37
butterflies 170

C

Caihong 133
Camarasaurus 64, 87
Cambrian explosion 8, 33
Cambrian Period 8, 14, 32
camouflage 20, 50, 56, 63, 181
Campylognathoides 149
Canada 14, 33, 34, 37, 96
Carboniferous Period 9, 44, 45, 48, 58
cats 186, 188, 189, 191
cattle, wild 185, 194
Caudipteryx 76, 77, 116, 117
Caupedactylus 150
Cearadactylus 150, 151
Cenozoic Era 8, 15, 171
Centrosaurus 102
ceratopsians 25, 86, 95, **98–99**
Ceratosaurus 78, 79
Chasmosaurus 99, 103
China 15, 63, 74, 93, 94, 114, 122, 126, 132
  mammals 174, 178
Citipati 117, 118, 119, **120–121**
claws 60, **124–125**
  birds 136, 140, 142
  for climbing 126, 136, 149, 196
  for defense 63, 83, 84, 115, 119, 122, 123, 125
  for digging 117, 125, 135, 176, 179
  fish-eaters 106
  mammals 176, 177, 182, 196
  meat-eaters 106, 107, 119, 124, 126, 129, 136, 142, 145
  pterosaurs 149
  for running 125
  on wings 140, 141, 149
climate 8, 12, 181, 193
cockroaches 47
Coelophysis 14, 66, 67, 73, 104, 105
color 76, 90, 98, 133, 154, 155
communication 89, 90, 102
Confuciusornis 140, 141
Corythosaurus 77, 89, 90, 102
crabs 158, 159
creodonts, 186, 187
crests
  birds 136, 140
  dinosaurs 85, 88, 89, 90–91, 104, 105, 106, 110, 117
  pterosaurs 148, 150, 151, 154–155
Cretaceous Period 9, 11, 21
crinoids 159
crocodylians 22, 55
Cryolophosaurus 15, 91, 104
cyanobacteria 8, 17, 19
cynodonts 55

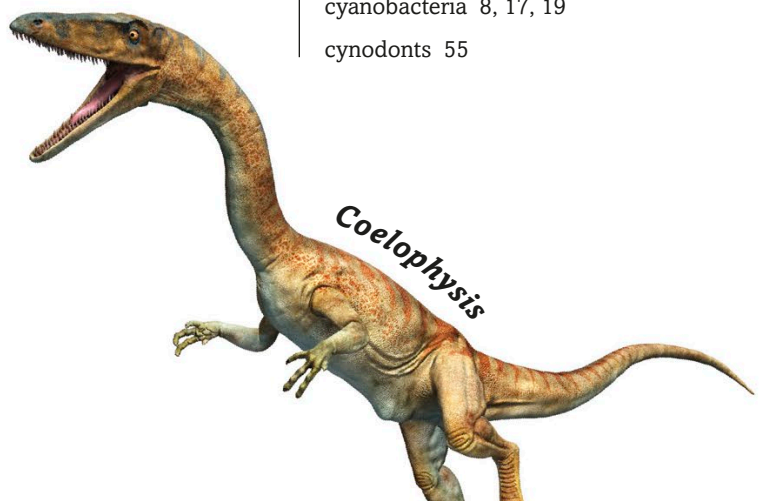

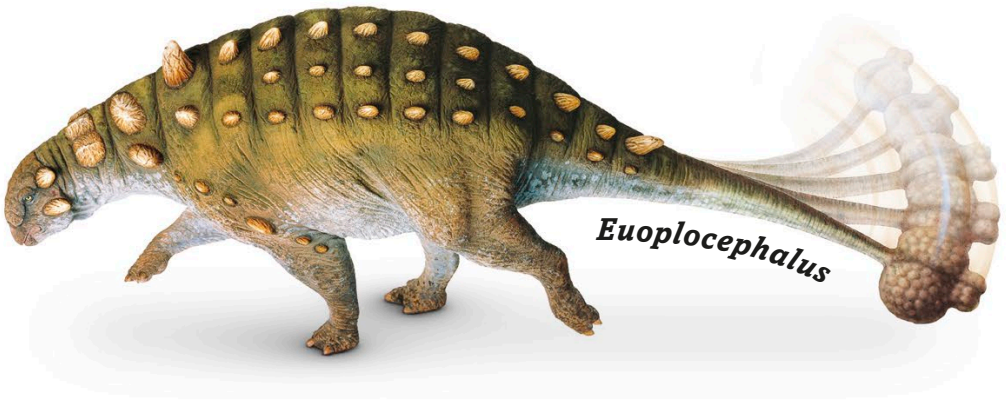

D

Dacentrurus 74, **78–79**
Darwinius 15, 196
Daspletosaurus 103, 109, 110
defense 33, 38, **82–83**
  armor 41, 81, 83, 161
  claws 63, 83, 84, 115, 119, 123, 124, 125
  herds 99, 103
  insects 47
  kicks 64
  spikes 75, 76, 81, 85, 125, 133
  tails 65, 76, 82
Deinocheirus 114, 115, 119
Deinonychus 103, 125, 126, 127
Deinotherium 194, 195
Devonian Period 9, 21, 38, 44
Dickinsonia 15, 31
dicynodonts 54, 56
digestion 27, 63, 81, 87, 177
Dimetrodon 54
Dimorphodon 148, 149
dinosaurs 11, 21, 24–27, 58–143
  first 8, 10, 45, 55, 60–61
Diplodocus 66, 86
Diprotodon 181, 188, 189
dragonflies 46, 48
dromaeosaurs **126–27**
Dromornis 142, 143
droppings 13, 111
Dryosaurus 84, 85
Dubreuillosaurus 104–105, 119
Dunkleosteus 40–41

E

Edmontonia 132–33
Edmontosaurus 86, 87, 88, 132
eggs 8, 52, **92–93**
  amphibians 50
  fossils of 14, 92, 93, 116, 119, 121
  mammals 174
Elanodactylus 150
Elasmosaurus 164, 165
Elasmotherium 185, 194–195
elephants 182, 183, 194
England 30, 84
Eoraptor 14, 60, 61
Eosimias 196
Eudimorphodon 149
Euoplocephalus 77, 82, 118
Europe 46, 63, 70, 74, 78, 88, 139, 194, 199
evolution 8, 19, **20–21**, 22
  feathers 140
extinction 8, 9, 21, 36, 39
eyes
  birds 137
  dinosaurs 27, 111, 115, 117
  insects 37, 46
  marine reptiles 164
  pterosaurs 149, 150

F

feathers
  dinosaurs 27, 93, 114, 117, 121, 122, 126, 132–139, 171
  evolution 140
feet
  birds 136
  dinosaurs 65, 70, 75, 89, 99, 118, 122
  mammals 177, 194
  marine reptiles 161, 163
  and running 115
fins 38, 39, 40, 41, 50, 51
fish 9, 38–41, 50, 106, 158
flight 141–142, 149, 179
flippers 161–163, 165, 167
footprints 13, 72–73, 104, 150, 197
forests 8, 10, 13, 43, 44
fossils 12–15, 46, 47, 172–173
  amber 13, 77, 172–173
  birds 172
  bone beds 14, 102
  eggs 14, 92–93, 120–121
  and evolution 20, 21
  feathers 15, 21, 132, 133, 173
  first animals 30–34, 36
  first dinosaurs 61
  fish 13, 159
  footprints 13, 72–73, 197
  insects 170, 171, 172, 173
  mammals 178, 179, 195
  plants 13, 171
  prosauropods 62, 63
  sauropods 64
  scales 159
  skulls 165
  and stomachs 106, 175, 196
  types of 12–13
France 84
frills 83, 98, 99, 101
fungi 42, 43
fur 178, 179

G-H

Gallimimus 114
Germany 14, 15, 178
Gigantoraptor 116–117
Giraffatitan 65
Glyptodon 176, 179
Gomphotherium 183, 188
hadrosaurs 87, **88–89**, 90, 91, 93, 118
hair 178, 179, 193, 194
hands 60, 61, 115, 117, **118–119**, 126
  meat-eaters 105, 119, 124
  plant-eaters 83, 118, 119, 125
  primates 196
Hatzegopteryx 151, 155
herds 73, 89, 99, **102–103**
Herrerasaurus 108
Heterodontosaurus 82, 83, 109, 118
Homalocephale 96, 97
hooves 75, 99, 186
horns 83, 96, 98, 99, 100, 103
  mammals 182, **184–185**
Huayangosaurus 74, 76
humans 171, 176, **196–199**
hunting in packs 102–103
Hyaenodon 186, 187

I-J

ichthyosaurs 160, 161, 162, 163, 164
Iguanodon 72, 84–85, 87, 106
Iguanodontians **84–85**
India 64, 70, 74
insects 9, 46, 48–49, 171
invertebrates 8, 22, 159
jaws 126
  mammals 186, 187, 189
  marine reptiles 165
  meat-eaters 108, 109, 111
  plant-eaters 87, 88
Jurassic Period 8, 11, 24
Juravenator 132

K-L

kangaroos 181
Kelenken **144–145**
Kentrosaurus 15, 74, 82, 83
Lambeosaurus 88, 91
Leedsichthys 158
legs 27, 61, 75, 85, 104, 113, 114, 117
  birds 140
  mammals 187, 194
  muscles 26, 64, 113, 114
Lepidotes 159
Liliensternus 104, 105
Liopleurodon 165, **166–167**
Lythronax 102, 103, 111

M

Mamenchisaurus 66
mammals 8, 9, 54, 55, **168–199**
mammoths 189, **192–194**
maniraptorans 93, 117, 122
marginocephalians 24, 25
marsupials **180–181**, 189
Mawsonites 30
meat-eaters 10, 60, 67, 104–117, 126–29, 134–135
  arms 118, 119
  birds 142–45
  claws 124, 125
  digestion 27
  hands 118, 119
  mammals 186–187
  packs 102–103
  pterosaurs 152–153
  teeth 108–109
Megacerops 182, 184
megaherbivores 183
Megaloceros 184–185, 195
Meganeura 46, 47, **48–49**
Megatherium 177
Mesozoic Era 8, 12–13
  mammals 175
  ocean life 158–159, 166
  plants 170
Microraptor 137
microscopic life 17, 30, 42
millipedes 9, 43, 46, 47
mollusks 8, 159
Mongolia 15, 71, 72, 116, 120, 122, 123, 135
mosasaurs 163, 165,
Mosasaurus 163, 165
muscles 23, 67, 76, 110
  legs 26, 64
  wings 148

N

necks 62, 64, **66–67**, 68, 69, 114, 122
  frills 83, 98, 99, 101
  marine reptiles 162
  pterosaurs 150
Nemegtosaurus 70, 71
Neogene Period 9
nests 13, 14, 92–95, 117, 121, 129
Nigersaurus 65, 86
North America 31, 64, 78, 122
  birds 142, 143
  mammals 176, 182
  pterosaurs 152
Nothosaurus 160–161, 162
Nyasasaurus 60, 61
Nyctosaurus 154, 155

O

oceans 9, 21, 158–167
Opabinia 33, 35
Ordovician Period 9, 21
ornithischians 24, 67
Ornitholestes 134–135
ornithomimosaurs **114–115**
ornithopods 24, 25, 84
osteoderms 70, 71, 179
Oviraptor 93, 116, 117, 125
oviraptorosaurs **116–117**
oxygen 19, 49

P-Q

pachycephalosaurs 25, **96–97**
Pachycephalosaurus 83, 96, 97
Paleogene Period 9
Paleozoic Era 8, 35, 36
Pangea 10, 11
Paraceratherium 183
Parasaurolophus 89, 90
Patagotitan 23, 68–71, 76
Pentaceratops 98
Permian Period 9, 21
Placerias 12, 54
Placodus 160, 161
plant-eaters 68–71, 74–75, 79, 80–81, 83, 84–89, 96–99, 102
  arms 118, 119
  claws 124, 125
  hands 118, 119, 125
  jaws 122
  mammals 182–83
plants 9, 12, 13, 42–45, 170, 171
Plateosaurus 63, 125
plesiosaurs 165, 167
Plesiosaurus 162
pliosaurs 164, 165, 166
Postosuchus 55
Precambrian Period 8, 15, 30
primates 196
prosauropods **62–63**
Psittacosaurus 87, **94–95**, 98, 133
Pteranodon 150–151, 155
Pterodactylus 154
pterosaurs 21, 22
Puertasaurus 70, 71
Quaternary Period 9
Quetzalcoatlus 151, **152–153**

R

reptiles 8, **52–53**, 55
  dinosaurs 8, 10, 11, 21, 24–27, 45, 55
  marine 8, 21, 53, 160–167
  pterosaurs 8, 148–155
Rhamphorhynchus 148–149
rhinoceros 189
Riojasaurus 62, 63
running
  birds 140, 143
  dinosaurs 83, 84, 104, 115, 117, 124
  trackways 73

S

saber-toothed animals 180, 187, 190–191
Saichania 80, 81
sails 54, 57, 84, 106
Saltasaurus 14, 68, 69, 92
saurischians 24
Sauropelta 80, 81
sauropodomorphs 24, 25
sauropods 25, **64–65**, 67
  eggs 14, 92, 93
  feet 118
  herds 102
  necks 64, 65, 66, 67

tails 76, 77
teeth 86
titanosaurs **68–71**, 72, 93, 153
Sauroposeidon 64, 65
scales 18, 39, 40, 51, 52
dinosaurs 27, 132, 133
mammals 178
Scelidosaurus 80, 81
scorpions 46, 47, 172, 173
Scutosaurus 52, 53
seeds 43, 45, 170, 171
Shantungosaurus 88, 89
sharks 22, 38, 39, 41, 159
shells 12, 32, 158, 160
mammals 176
Sinosauropteryx 15, 76–77, 132, 133
skin 70, 88, 90, 132, 133
mammals 179
pterosaurs 148, 154
skulls
birds 145
dinosaurs 61, 69, 71, 83, 90, 96–97, 107, 135
mammals 184, 185, 192
marine reptiles 164, 165
pterosaurs 155
Silurian Period 9
Sinornithosaurus 119, 126
Sinosauropteryx 15, 76, 77, 132, 133
sloths 176, 177, 179
Smilodon 187, 188–189, **190–191**
Sordes 149
South America 70, 88, 126
birds 143, 144,
mammals 176, 179, 180
spiders 47, 173
spikes 71, 74, 81, 133, 178
neck 81, 83, 98, 100
shoulder 74, 81
tail 65, 75, 76, 79, 82, 176, 178
thumb 84, 85, 125
spines 33, 37, 38, 65
mammals 179
spinosaurids **106**
Spinosaurus 15, 76, 106
Spriggina 31
starfish 159
stegosaurs 25, **74–75**, 78
Stegosaurus 67, 74–75, 79
Stenonychosaurus 93
Stethacanthus 38–39
stomachs 27, 64, 85
stromatolites 17, **18–19**
Struthiomimus 83, 109, 114
Styracosaurus 83, **100–101**
Suchomimus 106
Supersaurus 82
synapsids 54

T

tails 76–77, **162–163**
armored 80, 176
birds 134, 141
club 65, 77
feathered 116, 117, 127, 133, 136
fish 38
mammals 176, 192
marine reptiles **162–163**
pterosaurs 148, 149
quilled 133
spiked 65, 75, 76, 79, 82, 176, 178
whiplike 65, 82
Talarurus 80
Tapejara 150, 151
tar pits 195
teeth
fish-eating dinosaurs 106, 108, 127, 141, 148, 160
mammals 188–189
marine reptiles 160, 161, 164, 165, 166
meat-eating dinosaurs 54, 60, 107, 108–109, 110
plant-eaters 86–87
Tenontosaurus 84, 85, 103
tentacles 33, 159
terror birds **142–145**
tetrapods 22, 161
Thalassodromeus 154
therizinosaurs **122–123**

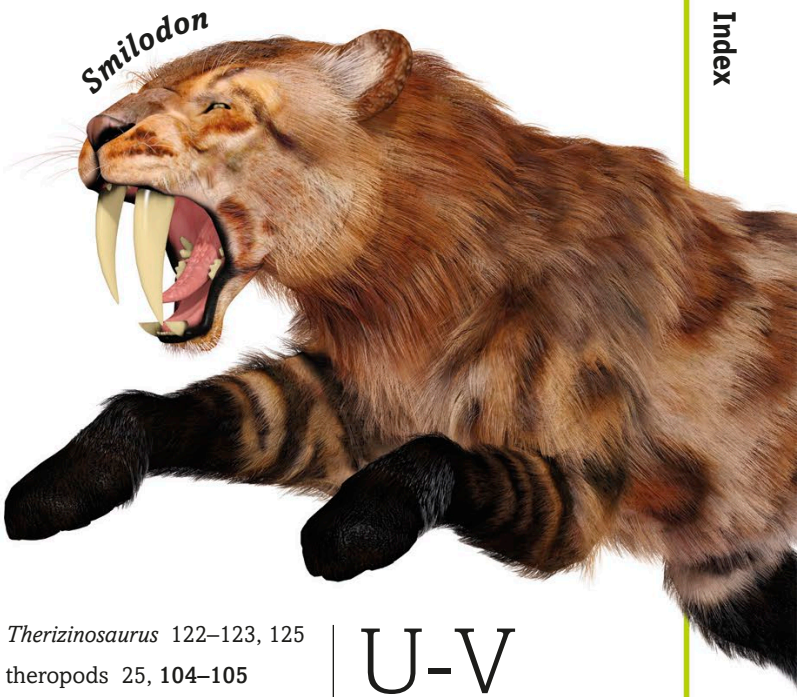

Therizinosaurus 122–123, 125
theropods 25, **104–105**
crests 91
eggs 93
feathered 27, 93, 117, 122, 132, 134
footprints 73
running 107
tails 77, 123, 127
teeth 108, 110
Thylacinus 181
thyreophorans 25
titanosaurs **68–71**, 72, 93, 153
toes
birds 141, 143
mammals 186
meat-eaters 104, 106, 126
plant-eaters 99, 185
trackways 71, **72–73**
trees 12, 13, 43, 44–45, 170
Triassic Period 8, 10, 14, 21
Tribrachidium 31
Triceratops 14, 98, 99, 112
trilobites 9, 13, 21, 35, **36–37**
Tupandactylus 155
turtles 8, 22, 163
tusks 182, 183, 188, 189, 192, 193, 195
tyrannosaurs 109, **110–111**, 115, 119
Tyrannosaurus 26–27, 67, 109, 110, 111, **112–113**

U-V

US 14, 30, 62, 73, 74, 107, 143, 195
Velociraptor 126, **128–129**
fossils of 15, 127, 128
teeth 108, 109
vertebrates 22–23, 38, 39

W

weight 23, 69, 116, 118
birds 142, 143
wings
birds 136, 137, 141, 143
mammals 179
pterosaurs 148, 149, 150
wombats 181, 188
worms 33, 46, 175

Y

young 89, 92–95, 103
caring for 119, 121, 129
mammals 175, 180, 181, 192, 194
as prey 153

ACKNOWLEDGMENTS

The publisher would like to thank the following people for their help with making the book: Priyanjali Narain for editorial assistance; Rabia Ahmad, Meenal Goel, and Mahua Mandal for design assistance; Charlotte Webb for proofreading; and Carron Brown for indexing.

With special thanks to illustrator James Kuether

Smithsonian Project Coordinator:
Kealy E. Gordon

Smithsonian Enterprises:
Kealy E. Gordon, Product Development Manager
Ellen Nanney, Licensing Manager
Brigid Ferraro, Vice President, Education and Consumer Products
Carol LeBlanc, Senior Vice President, Education and Consumer Products

Reviewer for the Smithsonian:
Matthew T. Miller, Museum Technician (Collections Volunteer Manager), Department of Paleobiology, National Museum of Natural History

The Smithsonian name and logo are registered trademarks of the Smithsonian Institution.

The publisher would like to thank the following for their kind permission to reproduce their photographs:

(Key: a-above; b-below/bottom; c-center; f-far; l-left; r-right; t-top)

2-3 Getty Images: Ira Block / National Geographic. **4 123RF.com:** Nicolas Fernandez (l). **5 James Kuether:** (br). **6 123RF.com:** Corey A Ford (tr). **Dorling Kindersley:** American Museum of Natural History (tl). **7 Alamy Stock Photo:** Stocktrek Images, Inc. (tr, br). **Nobumichi Tamura:** (bc). **8 Dorling Kindersley:** Lynton Gardiner / The American Museum of Natural History (cr). **James Kuether:** (cl, cb). **9 123RF.com:** Corey A Ford (clb). **Dorling Kindersley:** Jon Hughes (c); Oxford Museum of Natural History (bl); Harry Taylor / Hunterian Museum University of Glasgow (tr). **James Kuether:** (cla). **10 James Kuether:** (cb). **11 iStockphoto.com:** dottedhippo (cb). **13 Alamy Stock Photo:** PjrStudio (clb). **Dorling Kindersley:** Courtesy of Dorset Dinosaur Museum (tl). **Dreamstime.com:** Marcio Silva / Mbastos (tr). **Science Photo Library:** Natural History Museum, London (cr); Sinclair Stammers (c). **14 Dorling Kindersley:** Lynton Gardiner / The American Museum of Natural History (tl). **James Kuether:** (br). **15 Getty Images:** De Agostini Picture Library (cr). **James Kuether:** (cb, tr, clb, tl). **16 Science Photo Library:** TAKE 27 LTD. **17 Dorling Kindersley:** Harry Taylor / Hunterian Museum University of (br). **Dreamstime.com:** Derekteo (tr). **Science Photo Library:** Henning Dalhoff (cr, cb, ca). **18-19 Alamy Stock Photo:** BIOSPHOTO. **20 123RF.com:** Ilona Sapozhnikova (bl). **20-21 Getty Images:** James L. Amos (c). **22 Alamy Stock Photo:** Juniors Bildarchiv GmbH (bl). **22-23 Dorling Kindersley:** Senckenberg Gesellshaft Für Naturforschung Museum (t). **23 Nobumichi Tamura:** (br). **24 James Kuether:** (c, br). **25 James Kuether:** (cla, crb). **28-29 Masato Hattori**. **30 Alamy Stock Photo:** The Natural History Museum (cb). **Science Photo Library:** Dr. Gilbert S. Grant (tr). **30-31 Science Photo Library:** Chase Studio (b). **31 123RF.com:** Nicolas Fernandez (tl). **Getty Images:** De Agostini Picture Library (bc). **Science Photo Library:** Frans Lanting, Mint Images (tr). **32 James Kuether:** (tl). **33 Alamy Stock Photo:** National Geographic Creative (tl). **James Kuether:** (bl). **Nobumichi Tamura:** (ca). **34-35 Alamy Stock Photo:** All Canada Photos. **36 Alamy Stock Photo:** National Geographic Creative (br). **37 Dorling Kindersley:** Oxford Museum of Natural History (r). **38 Masato Hattori:** (ca). **James Kuether:** (t). **Nobumichi Tamura:** (br). **39 James Kuether:** (cra). **Science Photo Library:** Millard H Sharp (cb). **40 Alamy Stock Photo:** Sabena Jane Blackbird (tr). **James Kuether:** (tl). **Nobumichi Tamura:** (br). **40-41 James Kuether:** (c). **41 123RF.com:** Linda Bucklin (tr); Corey A Ford (b). **Getty Images:** Stocktrek Images (cra). **iStockphoto.com:** Warpaintcobra (crb). **43 Masato Hattori:** (tl). **44 123RF.com:** Corey A Ford (l). **Dorling Kindersley:** Oxford Museum of Natural History (tc); Oxford Museum of Natural History (bl). **45 123RF.com:** Corey A Ford (cr). **Dorling Kindersley:** Colin Keates / Natural History Museum, London (bl, tc). **46 123RF.com:** Corey A Ford (c). **Alamy Stock Photo:** Corbin17 (tr); The Natural History Museum, London (bc). **47 Alamy Stock Photo:** Sabena Jane Blackbird (tr); The Natural History Museum, London (tl). **Getty Images:** Markus Matzel / ullstein bild (br). **Science Photo Library:** Gilles Mermet (bl). **48-49 Studio 252MYA:** Lucas Lima. **50 James Kuether:** (b). **Science Photo Library:** Pascal Goetgheluck (clb). **51 iStockphoto.com:** scigelova (cr). **James Kuether:** (tr). **Nobumichi Tamura:** (cra). **52-53 James Kuether:** (ca). **52 Dorling Kindersley:** John Holmes - modelmaker / Natural History Museum, London (b); Harry Taylor / Natural History Museum, London (tr). **53 Dorling Kindersley:** Institute of Geology and Palaeontology, Tubingen, Germany (cr). **54 James Kuether:** (tl). **55 James Kuether:** (br). **56-57 Getty Images:** Arthur Dorety / Stocktrek Images. **58-59 James Kuether**. **60 James Kuether:** (cl). **Nobumichi Tamura:** (b). **60-61 James Kuether:** (c). **61 Nobumichi Tamura:** (tl, br). **62 James Kuether:** (cr, bl). **63 Nobumichi Tamura:** (bc). **64 123RF.com:** Mark Turner (cr). **Alamy Stock Photo:** ZUMA Press, Inc. (tl). **James Kuether:** (bl). **65 123RF.com:** Mark Turner (tr, cl). **Nobumichi Tamura:** (tl). **66 123RF.com:** Mark Turner (bl). **James Kuether:** (bc). **67 James Kuether:** (cl). **Nobumichi Tamura:** (tl). **69 James Kuether:** (l). **70 James Kuether:** (br). **71 James Kuether:** (bc, tr). **72-73 Alamy Stock Photo:** robertharding (c). **Getty Images:** milehightraveler (bc). **72 James Kuether:** (bl). **Reuters:** David Mercado (bc). **Science Photo Library:** University Corporation for Atmospheric Research (clb). **73 Alamy Stock Photo:** Carver Mostardi (bc); Jill Stephenson (crb). **James Kuether. 74 123RF.com:** leonello calvetti (tl). **James Kuether:** (cl). **75 123RF.com:** Corey A Ford (tr). **Dorling Kindersley:** Colin Keates / Natural History Museum, London (br). **Science Photo Library:** Jose Antonio Penas (tl). **76 James Kuether:** (bl, clb, br). **77 Dorling Kindersley:** Lynton Gardiner / The American Museum of Natural History (br). **James Kuether:** (crb). **Dr Lida XING:** (tl). **78-79 Science Photo Library:** Jose Antonio Penas. **80 123RF.com:** leonello calvetti (bl). **Alamy Stock Photo:** Stocktrek Images, Inc. (br). **James Kuether:** (tl). **81 123RF.com:** Corey A Ford (tr). **82 James Kuether:** (c). **83 Dorling Kindersley:** American Museum of Natural History (tr). **James Kuether:** (cr). **84 James Kuether:** (tl, tr). **84-85 James Kuether:** (c). **85 Dreamstime.com:** Tonny Wu (br). **86 Dorling Kindersley:** Colin Keates / Natural History Museum, London (ca); Oxford Museum of Natural History (bc). **Getty Images:** Bill O'Leary / The Washington Post (tr). **James Kuether:** (tc, clb, c, bl). **87 123RF.com:** Athikhun Boonrin (clb). **Dorling Kindersley:** Robert L. Braun (br); Colin Keates / Natural History Museum, London (cl, c); Courtesy of Dorset Dinosaur Museum (cla). **88 James Kuether:** (tr, tl, bl). **89 123RF.com:** Corey A Ford (br). **Dorling Kindersley:** Royal Tyrrell Museum of Palaeontology, Alberta, Canada (tl). **Masato Hattori:** (bl). **90 123RF.com:** chastity (bl); Corey A Ford (tl); Michael Rosskothen (br). **Alamy Stock Photo:** CGElv Austria / Elvele Images Ltd (bc). **91 123RF.com:** Corey A Ford (cra). **Getty Images:** Ira Block / National Geographic (tl). **James Kuether:** (bl, br, cla). **92 123RF.com:** leonello calvetti (tr). **Dorling Kindersley:** Courtesy of Dorset Dinosaur Museum (tc); John Downs / John Holmes - modelmaker / Natural (cra). **93 Dorling Kindersley:** Colin Keates / Natural History Museum, London (cra); State Museum of Nature, Stuttgart (br). **Masato Hattori. Nobumichi Tamura:** (cb, bl). **94-95 Alamy Stock Photo:** John Cancalosi. **96 123RF.com:** Corey A Ford (bc). **Alamy Stock Photo:** Oleksiy Maksymenko Photography (br). **James Kuether:** (bl). **Nobumichi Tamura:** (tc). **96 Dorling Kindersley:** Royal Tyrrell Museum of Palaeontology, Alberta, Canada (cl) **97 James Kuether:** (tr). **Nobumichi Tamura:** (tl). **97 Dorling Kindersley:** Peter Minister and Andrew Kerr (b) **98 James Kuether:** (cl, br). **99 James Kuether:** (tr, bc, tl). **100-101 Alamy Stock Photo:** MasPix. **102 James Kuether:** (b). **103 Alamy Stock Photo:** Mohamad Haghani (cr). **Getty Images:** Stocktrek Images (br). **James Kuether:** (t). **104 James Kuether:** (t, br). **105 Alamy Stock Photo:** CGElv Austria / Elvele Images Ltd (br). **Masato Hattori:** (tr). **James Kuether:** (tl). **106 James Kuether:** (tr, cr, cl, cb, bl). **107 Dorling Kindersley:** Lynton Gardiner / The American Museum of Natural History (cl). **James Kuether:** (tr, br). **108 Alamy Stock Photo:** AA World Travel Library (cr). **James Kuether:** (cb, tr, cra). **Dorling Kindersley:** Natural History Museum, London (ca, br) **109 Getty Images:** Crazytang (tr). **James Kuether:** (cr, cb). **Dorling Kindersley:** Colin Keates / Natural History Museum, London (crb), Oxford Museum of Natural History (tl), Royal Tyrrell Museum of Palaeontology, Alberta, Canada (cla) **110 James Kuether:** (tl, br, cr, bc). **111 Dreamstime.com:** Shutterfree (c). **James Kuether:** (tr, bl, tl). **112-113 Getty Images:** (background). **114 © cisiopurple/cisiopurple.deviantart.com:** (tl). **115 Alamy Stock Photo:** Xavier Fores - Joana Roncero (tr). **James Kuether:** (c). **Nobumichi Tamura:** (br). **115 Dorling Kindersley:** Royal Tyrrell Museum of Palaeontology, Alberta, Canada (tl) **116 © cisiopurple/cisiopurple.deviantart.com:** (tl, tc, tr). **Masato Hattori:** (bl). **116-117 © cisiopurple/cisiopurple.deviantart.com:** (c). **117 © cisiopurple/cisiopurple.deviantart.com:** (cr). **Masato Hattori:** (tr). **Nobumichi Tamura:** (br). **118 James Kuether:** (bl, br). **119 Alamy Stock Photo:** The Natural History Museum (cb). **James Kuether:** (tr, bl). **120-121 Alamy Stock Photo:** Larry Geddis (background). **122 Nobumichi Tamura:** (bl). **122-123 © cisiopurple/cisiopurple.deviantart.com:** (c). **123 © cisiopurple/cisiopurple.deviantart.com:** (br). **James Kuether:** (tr). **124 Getty Images:** Walter Geiersperger / Corbis (cr). **James Kuether:** (bc, br). **125 James Kuether:** (tl). **Science Photo Library:** Dirk Wiersma (ca/claw). **126 Alamy Stock Photo:** Stocktrek Images, Inc. (bl). **James Kuether:** (tl). **126-127 James Kuether:** (c). **127 Nobumichi Tamura:** (tl). **128-129 James Kuether**. **130-131 Alamy Stock Photo:** Stocktrek Images, Inc.. **132 Dorling Kindersley:** Courtesy of Dorset Dinosaur Museum (br). **James Kuether:** (bl, crb). **133 Dorling Kindersley:** Colin Keates / Natural History Museum, London (tc); Senckenberg Gesellshaft Für Naturforschung Museum (cr). **The Field Museum:** © Velizar Simeonovski, The Field Museum, for the UT Austin Jackson School of Geosciences. (tr). **Getty Images:** Bernard Weil / Toronto Star (cl). **134 123RF.com:** Alessandro Zocchi (tl). **Alamy Stock Photo:** Stocktrek Images, Inc. (bl). **Getty Images:** John Weinstein / Field Museum Library (c). **135 123RF.com:** Elena Duvernay (br); Corey A Ford (cl). **Alamy Stock Photo:** Stocktrek Images, Inc. (bl). **Science Photo Library:** juliu (t). **136 Alamy Stock Photo:** Mohamad Haghani (l); Stocktrek Images, Inc. (tr). **137 Getty Images:** Spencer Platt (bl). **James Kuether:** (tr). **140 Chen Yu:** (br). **Science Photo Library:** Jaime Chirinos (tl, tr); Mikkel Juul Jensen (bl). **141 Getty Images:** Daniel Eskridge / Stocktrek Images (br). **Nobumichi Tamura:** (cl). **142 James Kuether:** (bc). **Science Photo Library:** Jaime Chirinos (l); Millard H Sharp (br). **142-143 Alamy Stock Photo:** Stocktrek Images, Inc. (c). **143 James Kuether:** (br). **Science Photo Library:** (bc); Jaime Chirinos (tc, tr). **144-145 123RF.com:** Corey A Ford. **146-147 Alamy Stock Photo:** Stocktrek Images, Inc. **148 Alamy Stock Photo:** Daniel Borzynski (br); Natural Visions (bl). **Science Photo Library:** Mark P. Witton (tl). **149 Alamy Stock Photo:** Archive PL (t). **Masato Hattori:** (br, bl). **150 Getty Images:** Sergey Krasovskiy (tl, bl). **Nobumichi Tamura:** (br). **150-151 123RF.com:** Mark Turner (c). **151 Alamy Stock Photo:** Stocktrek Images, Inc. (bc). **Getty Images:** Sergey Krasovskiy (t, cr). **154 Alamy Stock Photo:** National Geographic Creative (bl). **Getty Images:** Antonio Scorza / AFP (tr). **James Kuether:** (tl). **154-155 Alamy Stock Photo:** dpa picture alliance (bc). **155 Getty Images:** Sergey Krasovskiy (br). **James Kuether:** (tr). **Nobumichi Tamura:** (cr). **156-157 Masato Hattori**. **158 123RF.com:** kampwit (bc). **Science Photo Library:** Millard H Sharp (bl). **159 Dorling Kindersley:** Senckenberg Gesellshaft Für Naturforschung Museum (br). **160 Masato Hattori:** (bl). **James Kuether:** (tl). **Nobumichi Tamura:** (tr). **161 123RF.com:** Michael Rosskothen (cr). **Dorling Kindersley:** Jon Hughes (tr). **James Kuether:** (bl, cla). **162 123RF.com:** Corey A Ford (tl). **Dorling Kindersley:** Colin Keates / Natural History Museum, London (ca). **James Kuether:** (tr, cr, bl, br). **163 Alamy Stock Photo:** Scott Camazine (ca). **James Kuether:** (b, tl). **164 123RF.com:** Corey A Ford (bl); Eugen Thome (clb). **Dorling Kindersley:** Gary Kevin / Bristol City Museum and Art Gallery (cl). **James Kuether:** (tr, br). **165 iStockphoto.com:** dottedhippo (cr). **James Kuether:** (tr, cl). **166-167 Science Photo Library:** Jaime Chirinos. **168-169 Getty Images:** Stocktrek Images. **170 Alamy Stock Photo:** The Natural History Museum (br, bl). **Rienk de Jong:** (tl). **171 Depositphotos Inc:** Pshenichka (bl). **Science Photo Library:** BARBARA STRNADOVA (tl). **Senckenberg:** (cl, tr). **172 Getty Images:** The Image Bank (tl). **Dr Lida XING:** (bl). **173 Alamy Stock Photo:** John Cancalosi (br); PjrStudio (tl). **Getty Images:** Lonely Planet Images (cr). **Courtesy Dr Enrique Peñalver and Ricardo Pérez de la Fuente:** (tr). **174 Masato Hattori:** (b). **Science Photo Library:** Michael Long (cr). **175 Alamy Stock Photo:** Magdalena Rehova (cr). **Dorling Kindersley:** Peter Minister and Andrew Kerr / Dreamstime.com: (tl). **176 123RF.com:** William Roberts (t). **Getty Images:** Roman Garcia Mora / Stocktrek Images (cl). **176-177 James Kuether:** (bc). **177 Alamy Stock Photo:** Mauro Toccaceli (r). **James Kuether:** (cra). **Science Photo Library:** Roman Uchytel (tr). **178 123RF.com:** Thittaya Janyamethakul (tl). **Dorling Kindersley:** Harry Taylor / Natural History Museum, London (bl). **James Kuether:** (ca, c). **Nobumichi Tamura:** (tr). **179 Alamy Stock Photo:** The Natural History Museum (tl); Gianni Muratore (tc). **Depositphotos Inc:** heavyrobbie (br). **Dorling Kindersley:** Harry Taylor / Natural History Museum, London (ca). **Nobumichi Tamura:** (tr). **180 Alamy Stock Photo:** Gerry Pearce (bc). **Science Photo Library:** Jaime Chirinos (l); Julius T Csotonyi (cr). **Roman Uchytel:** (tr). **181 Science Photo Library:** Mauricio Anton (tl); Michael Long (tr). **Roman Uchytel:** (br). **182 123RF.com:** Mark Turner (bl). **James Kuether:** (tl). **Nobumichi Tamura:** (br). **183 Dorling Kindersley:** Natural History Museum, London (tr). **James Kuether:** (tl). **Nobumichi Tamura:** (bl). **184 123RF.com:** Corey A Ford (tc); Mark Turner (ca). **Alamy Stock Photo:** Roberto Nistri (tl); Stocktrek Images, Inc. (bc). **Dorling Kindersley:** Harry Taylor / Natural History Museum, London (bl, cra). **185 123RF.com:** Derrick Neill (br). **James Kuether:** (tr, bc, cra). **185 Dorling Kindersley:** Harry Taylor / Natural History Museum, London (bl) **186 Dorling Kindersley:** Natural History Museum, London (cl). **James Kuether:** (br). **Science Photo Library:** Mauricio Anton (bl); Roman Uchytel (tl). **187 James Kuether:** (b). **Science Photo Library:** Roman Uchytel (tl, cra). **188 Alamy Stock Photo:** Roberto Nistri (tl). **Dorling Kindersley:** Colin Keates / Natural History Museum, London (bc). **James Kuether:** (tr). **Science Photo Library:** Mauricio Anton (bl). **188-189 Alamy Stock Photo:** Robert Malone (cr). **189 Alamy Stock Photo:** PLG (bc). **Dorling Kindersley:** Jon Hughes (cb); Harry Taylor / Natural History Museum, London (ca). **190-191 Science Photo Library:** Roman Uchytel. **192 Dorling Kindersley:** Jon Hughes (bl). **194 Alamy Stock Photo:** Stocktrek Images, Inc. (tc). **195 123RF.com:** Steven Cukrov (br). **Alamy Stock Photo:** Stocktrek Images, Inc. (bl). **James Kuether:** (tl, r). **196 James Kuether:** (bl). **197 Alamy Stock Photo:** Cro Magnon (bl); Martin Shields (tr). **Dorling Kindersley:** Oxford Museum of Natural History (br/Homo ergaster, br/Homo heidelbergensis, br/Homo sapiens); Harry Taylor / Hunterian Museum University of Glasgow (tc). **Science Photo Library:** Philippe Plailly (tl). **198-199 Alamy Stock Photo:** Hemis. **201 James Kuether:** (br). **207 James Kuether:** (tr)

Cover images: Front: **123RF.com:** Corey A Ford bl/ (Meganeura); **Alamy Stock Photo:** Mohamad Haghani fclb/ (Yi qi), National Geographic Creative tl, Stocktrek Images, Inc. bl/ (Titanis); **Chen Yu:** cra/ (Hongshanornis); **Dorling Kindersley:** Jon Hughes crb/ (Mixosaurus), Senckenberg Gesellshaft Für Naturforschung Museum tc; **Dreamstime.com:** Anetlanda ca/ (Scorpion), Tonny Wu tr/ (Mantellisaurus); **Getty Images:** Walter Geiersperger / Corbis cb/ (Therizinosaurus hand claw); **Science Photo Library:** Pascal Goetgheluck cb/ (Eryops); Back: **Depositphotos Inc:** CoreyFord clb; **Dorling Kindersley:** John Holmes - modelmaker / Natural History Museum, London cra/ (Westlothiana), Natural History Museum, London br, Oxford Museum of Natural History cla/ (Alethopteris), fcra/ (Selenopeltis); **Nobumichi Tamura:** tl; Spine: **Dorling Kindersley:** American Museum of Natural History.

All other images © Dorling Kindersley
For further information see: www.dkimages.com